



AEC-Q200
Automotive Grade
Capacitors



AEC-Q200 Automotive Grade Capacitors

At Knowles Precision Devices (KPD), we manufacture Single Layer, Multilayer, High Reliability and Precision Variable Capacitors; EMI Filters and Thin Film Devices. One of our fields of expertise is the design and manufacture of components important to engineers in the automotive industry. Today's vehicles have many electronic control units that enable absolute precision and control.

The Automotive Electronics Council (AEC) Component Technical Committee is the standardization body for establishing standards for reliable, high-quality electronic components. Components meeting these specifications are suitable for use in the harsh automotive environment without additional component-level qualification testing.

The Component Technical Committee established AEC-Q200 "Stress Test Qualification for Passive Components" to define the minimum stress test driven qualification requirements for electrical devices, including ceramic capacitors. KPD's Syfer brand has developed a range of MLC capacitors and surface mount EMI filters qualified to AEC-Q200 rev D to meet the needs of high reliability and automotive manufacturers.

Knowles Suzhou (China), Norwich (England) and Penang (Malaysia) facilities are accredited to IATF 16949:2016 for the design, manufacture and supply of AEC-Q200 qualified MLCC components. Please refer to the following pages for details of the product ranges offered.

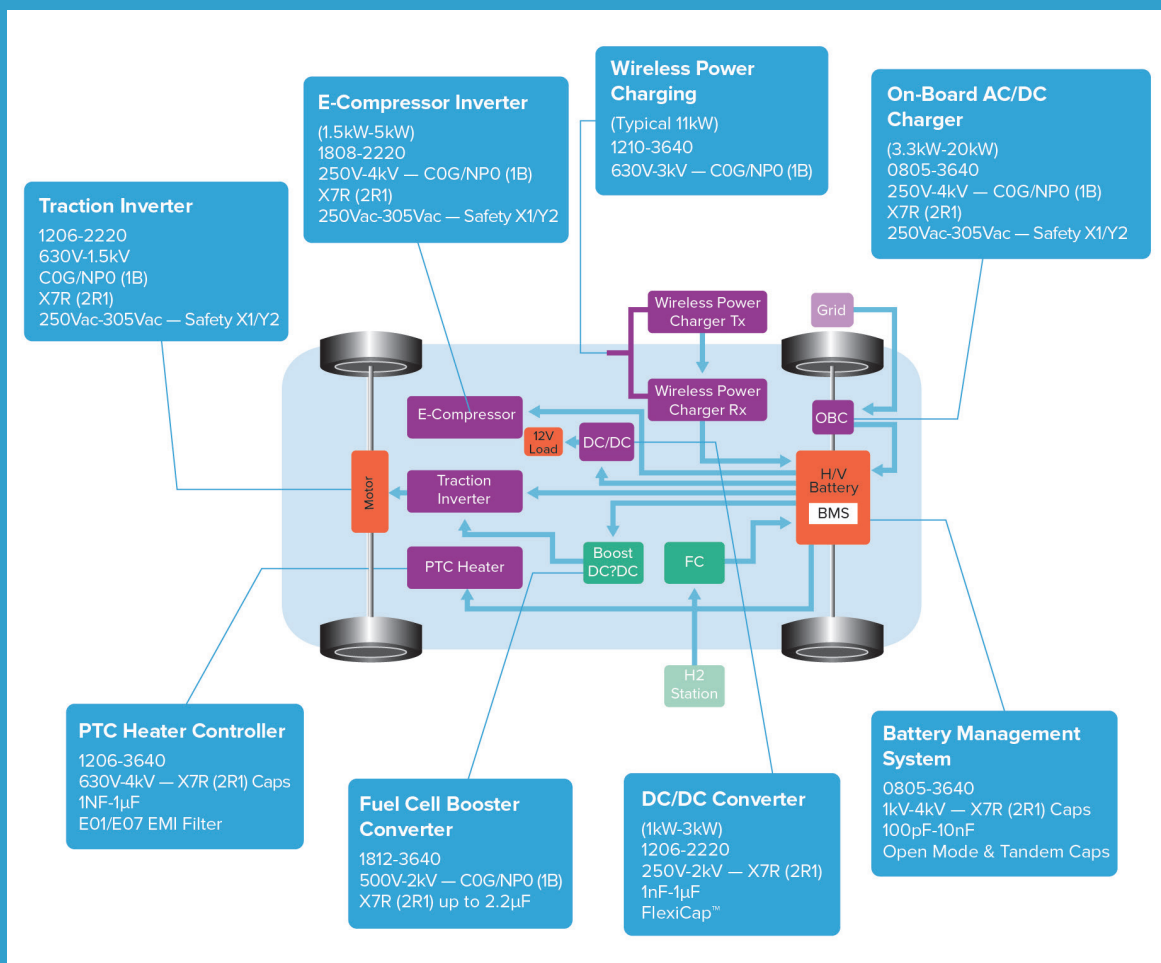


Table of Contents

GENERAL AND TECHNICAL INTRODUCTION

| | |
|---|-------|
| Dielectric Characteristics | 4-6 |
| FlexiCap™ Overview | 7 |
| IECQ-CECC and AEC-Q200 Periodic Tests | 8 |
| Manufacturing Process | 9 |
| Testing | 10 |
| Regulations and Compliance | 11 |
| Explanation of Aging of MLC | 12 |
| Mounting, Soldering, Storage and Mechanical Precautions | 13-14 |
| Ceramic Chip Capacitors — Packaging Information | 15-16 |
| Chip Dimensions | 17 |

MLC CAPACITORS

| | |
|--|-------|
| C0G/NP0 (1B) — AEC-Q200 and Standard Ranges | 18-20 |
| X7R (2R1) — AEC-Q200 and Standard Ranges | 21-23 |
| Ordering Information — AEC-Q200 and Standard Ranges | 24 |
| StackiCap™ Capacitors | 25 |
| Safety Certified AC Capacitors | 26 |
| Enhanced 250Vac and 305Vac Safety Certified AC Capacitors..... | 27-31 |
| Legacy 250Vac Safety Certified AC Capacitors | 32-34 |
| Open Mode Capacitors — C0G/NP0 (1B) and X7R (2R1) | 35 |
| Tandem Capacitors — X7R (2R1) | 36 |
| X8R High Temperature Capacitors — up to 150°C | 37 |
| Ultra-Low ESR HiQ MLCCs — X8G Range | 38-39 |

SM EMI FILTERS

| | |
|---|-------|
| Surface Mount EMI Filters — E01 and E07 Ranges | 40-41 |
| Surface Mount EMI Filters — E03 X2Y IPCs | 42-44 |
| Other Products Available That Are <u>Not</u> AEC-Q200 Qualified | 45-46 |
| Our Other Products | 47 |

Dielectric Characteristics

CLASS I DIELECTRICS

Multilayer Ceramic Capacitors are generally divided into classes, which are defined by the capacitance temperature characteristics over specified temperature ranges. These are designated by alphanumeric codes. Code definitions are summarized below and are also available in the relevant national and international specifications.

Capacitors within this class have a dielectric constant range from 10 to 100. They are used in applications that require ultra stable

dielectric characteristics with negligible dependence of capacitance and dissipation factor with time, voltage and frequency. They exhibit the following characteristics:

- a) Time does not significantly affect capacitance and dissipation factor (Tan δ) – no aging.
- b) Capacitance and dissipation factor are not affected by voltage.
- c) Linear temperature coefficient.

CLASS I DIELECTRICS

| | | COG/NPO (1B) (Porcelain) | P90 (Porcelain) | COG/NPO (1B) | | X8G | Class I High Temperature | |
|---|--------------------------|---|-----------------|--|--|-----------------|--|-----------------|
| Dielectric classifications | - | Ultra Stable | Ultra Stable | Ultra Stable | | Ultra Stable | Ultra Stable | |
| | IECQ-CECC | - | - | 1B/CG | | - | - | - |
| | EIA | COG/NPO (1B) | P90 | COG/NPO (1B) | | X8G | - | - |
| | MIL | - | - | CG (BP) | | - | - | - |
| Ordering code | DLI | CF | AH | - | - | - | - | - |
| | Novacap | - | - | - | N, RN | - | F | D, RD |
| | Syfer | - | - | Q, U | C | H | - | G |
| | Voltronics | F | H | Q | - | - | - | - |
| Rated temperature range | - | -55°C to +125°C | -55°C to +125°C | -55°C to +125°C | -55°C to +125°C | -55°C to +150°C | -55°C to +160°C | -55°C to +200°C |
| Maximum capacitance change over temperature range | No DC voltage applied | 0 ± 15 ppm/°C | +90 ± 20 ppm/°C | 0 ± 30 ppm/°C | 0 ± 30 ppm/°C | 0 ± 30 ppm/°C | 0 ± 30 ppm/°C | 0 ± 30 ppm/°C |
| | Rated DC voltage applied | - | | | | | | |
| Tangent of loss angle (tan δ) | - | ≤0.0005 @1MHz | | ≤0.0005 @1MHz | >50pF ≤0.0015 ≤50pF 0.0015 (15/Cr + 0.7) | ≤0.0005 @1MHz | ≤0.001 | |
| Insulation resistance (Ri) | Time constant (Ri x Cr) | @25°C = 10 ⁶ MΩ min @125°C = 10 ⁵ MΩ min | | 100GΩ or 1000s (whichever is the least) | | | @25°C = 100GΩ or 1000ΩF @160°C & 200°C = 1GΩ or 10ΩF (whichever is the least) | |
| Capacitance tolerance | Cr < 4.7pF | ±0.05pF, ±0.10pF, ±0.25pF, ±0.5pF | | | | | | |
| | Cr ≥ 4.7 to <10pF | ±0.10pF, ±0.25pF, ±0.5pF | | | | | | |
| | Cr ≥ 10pF | ±1%, ±2%, ±5%, ±10% | | | | | | |
| Dielectric strength. Voltage applied for 5 seconds. Charging current limited to 50mA maximum. | ≤200V | 2.5 times | 2.5 times | 2.5 times | | | | |
| | >200V to <500V | | | Rated voltage +250V | | | | |
| | 500V to ≤ 1kV | | | 1.5 times | | | | |
| | >1kV to ≤ 1.2kV | | | 1.25 times | | | | |
| | >1.2kV | | | 1.2 times | | | | |
| Climatic category (IEC) | Chip | - | - | 55/125/56 | | - | - | |
| | Dipped | - | - | - | 55/125/21 | - | - | |
| | Discoidal | - | - | - | 55/125/56 | - | - | |
| Aging characteristic (Typical) | - | Zero | | | | | | |
| Approvals | Syfer Chip | - | - | - | QC-32100 | - | - | |



Dielectric Characteristics

CLASS II DIELECTRICS

Capacitors of this type have a dielectric constant range of 1000-4000 and also have a nonlinear temperature characteristic that exhibits a dielectric constant variation of less than $\pm 15\%$ (2R1) from its room temperature value, over the specified temperature range. Generally used for bypassing (decoupling), coupling, filtering, frequency discrimination, DC blocking and voltage transient suppression with greater volumetric efficiency than Class I units, while maintaining stability within defined limits.

Capacitance and dissipation factors are affected by:

- a) Time (Aging)
- b) Voltage (AC or DC)
- c) Frequency

CLASS II DIELECTRICS

| X5R | X7R (2R1) | | | X8R | Class II High Temperature | | | |
|---|--|------------|------------|-----------------|---------------------------|-----------------|--|--------------------------|
| Stable | Stable | | | Stable | Stable | | | - |
| - | 2C1 | 2R1 | 2X1 | - | - | | | IECQ-CECC |
| X5R | - | X7R (2R1) | - | X8R | - | | | EIA |
| - | BZ | - | BX | - | - | | | MIL |
| - | - | | | - | - | | | DLI |
| BW | - | B, RB | X | S | G | E, RE | | Novacap |
| P | R | X | B | N | - | X | | Syfer |
| - | - | X | - | - | - | - | | Voltronics |
| -55°C to +85°C | -55°C to +125°C | | | -55°C to +150°C | -55°C to +160°C | -55°C to +200°C | | - |
| $\pm 15\%$ | $\pm 15\%$ | $\pm 15\%$ | $\pm 15\%$ | $\pm 15\%$ | +15 -40% | +15 -65% | | No DC voltage applied |
| - | +15 -45% | - | +15 -25% | - | - | | | Rated DC voltage applied |
| ≤ 0.025 Typical* | $>25V \leq 0.025$ $\leq 25V \leq 0.035$ | | | ≤ 0.025 | ≤ 0.025 | | | - |
| 100G Ω or 1000s (whichever is the least) | | | | | | | | Time constant (Ri x Cr) |
| $\pm 5\%, \pm 10\%, \pm 20\%$ | | | | | | | | - |
| 2.5 times | | | | | | | | $\leq 200V$ |
| Rated voltage +250V | | | | | | | | $>200V$ to $<500V$ |
| 1.5 times | | | | | | | | 500V to $<1kV$ |
| 1.2 times | | | | | | | | $\geq 1kV$ |
| 55/85/56 | 55/125/56 | | | 55/150/56 | - | | | Chip |
| - | 55/125/21 | | | - | - | | | Dipped |
| - | 55/125/56 | | | - | - | | | Discoidal |
| 5% Typical | $<2\%$ per time decade | | | | | | | - |
| - | QC-32100 | - | | - | QC-32100 | - | | Syfer chip |
| | | | | | | | | Approvals |


* Refer to the MLC Capacitors catalog for details of Dissipation Factor.




Dielectric Characteristics

TYPICAL DIELECTRIC TEMPERATURE CHARACTERISTICS


Porcelain COG/NPO & P90

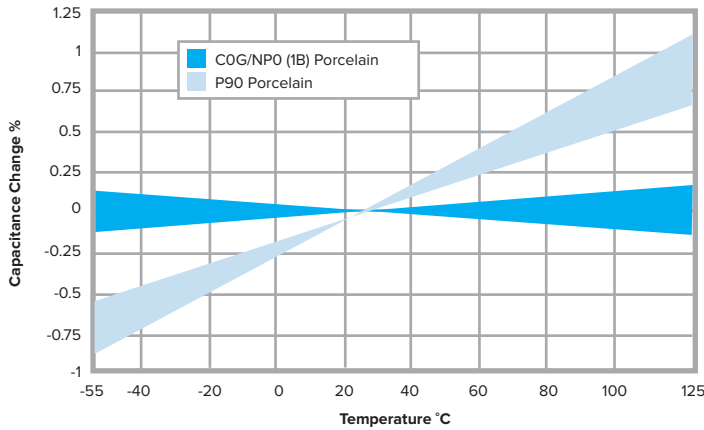

COG/NPO

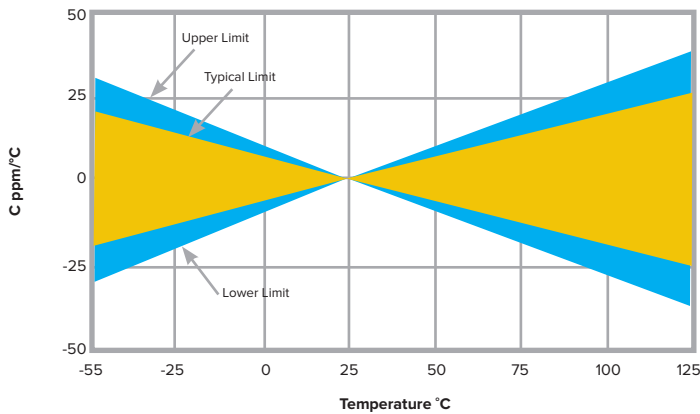


X7R (2R1)

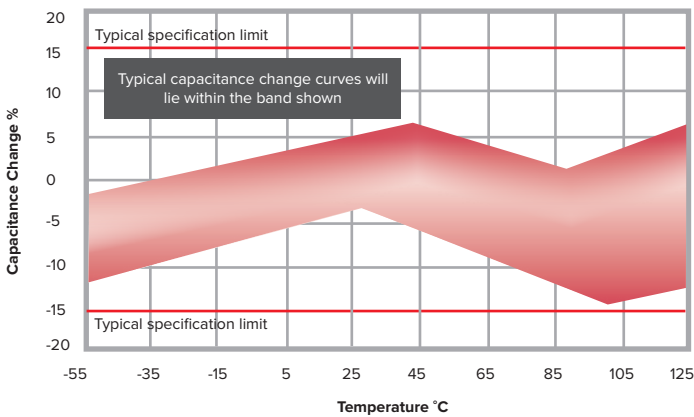


IMPEDANCE vs. FREQUENCY


Ultra Stable COG/NPO (1B) Dielectric

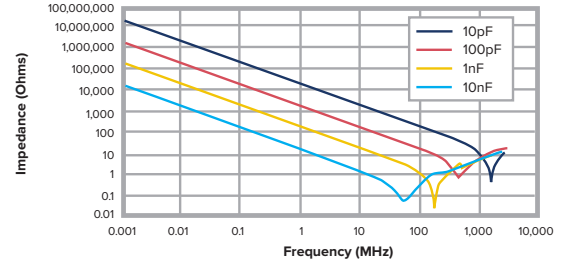

Stable X7R (2R1) Dielectric

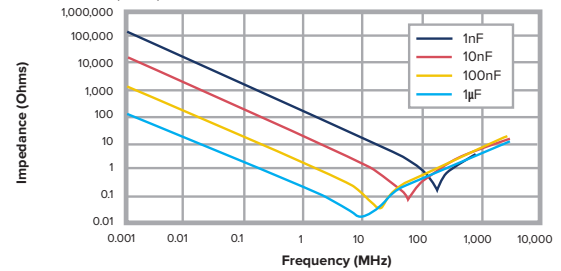


Stable X7R (2R1) Dielectric — 10nF

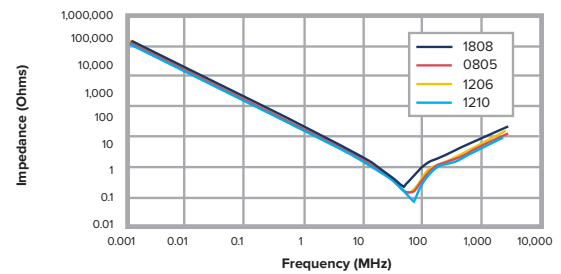


ESR vs. FREQUENCY — CHIPS

Ultra Stable COG/NPO (1B) Dielectric

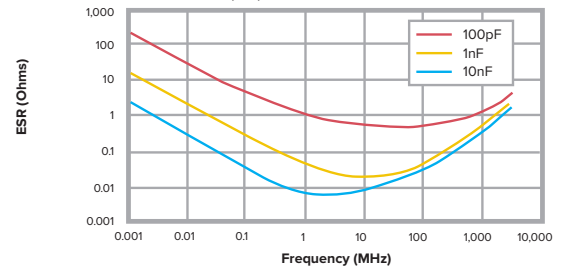

Stable X7R (2R1) Dielectric

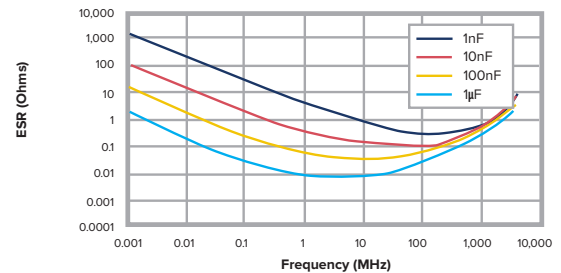

FlexiCap™ Overview

FLEXICAP™ TERMINATION


MLCCs are widely used in electronic circuit design for a multitude of applications. Their small package size, technical performance and suitability for automated assembly make them the component of choice for the specifier. However, despite the technical benefits, ceramic components are brittle and need careful handling on the production floor. In some circumstances they may be prone to mechanical stress damage if not used in an appropriate manner. Board flexing, depanelization, mounting through hole components, poor storage and automatic testing may all result in cracking. Careful process control is important at all stages of circuit board assembly and transportation — from component placement to test and packaging. Any significant board flexing may result in stress fractures in ceramic devices that may not always be evident during the board assembly process. Sometimes it may be the end customer who finds out — when equipment fails!

KNOWLES HAS THE SOLUTION — FLEXICAP™

FlexiCap™ has been developed as a result of listening to customers' experiences of stress damage to MLCCs from many manufacturers, often caused by variations in production processes. Our answer is a proprietary flexible epoxy polymer termination material that is applied to the device under the usual nickel barrier finish. FlexiCap™ will accommodate a greater degree of board bending than conventional capacitors.

KNOWLES FLEXICAP™ TERMINATION


Ranges are available with FlexiCap™ termination material offering increased reliability and superior mechanical performance (board flex and temperature cycling) when compared with standard termination materials. Refer to Knowles application note reference AN0001. FlexiCap™ capacitors enable the board to be bent almost twice as much before mechanical cracking occurs. Refer to application note AN0002. FlexiCap™ is also suitable for space applications, having passed thermal vacuum outgassing tests. Refer to Syfer application note reference AN0026.

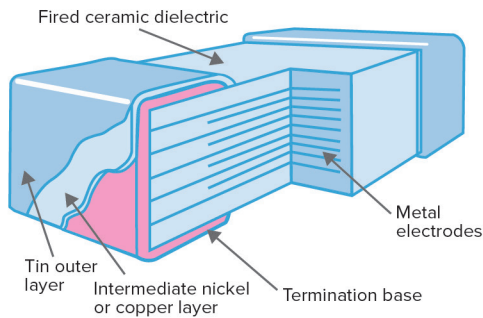

FlexiCap™ MLCC cross section

FLEXICAP™ BENEFITS

With traditional termination materials and assembly, the chain of materials from bare PCB to soldered termination provides no flexibility. In circumstances where excessive stress is applied, the weakest link fails. This means the ceramic itself may fail or short circuit. The benefit to the user is to facilitate a wider process window — giving a greater safety margin and substantially reducing the typical root causes of mechanical stress cracking. FlexiCap™ may be soldered using your traditional wave or reflow solder techniques, including lead free, and needs no adjustment to equipment or current processes. Knowles has delivered millions of FlexiCap™ components and during that time has collected substantial test and reliability data, working in partnership with customers worldwide to eliminate mechanical cracking. An additional benefit of FlexiCap™ is that MLCCs can withstand temperature cycling -55°C to +125°C in excess of 1,000 times without cracking. FlexiCap™ termination has no adverse effect on any electrical parameters, nor affects the operation of the MLCC in any way.

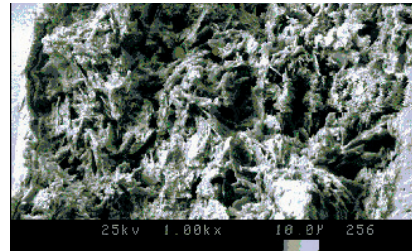

Picture taken at 1,000x magnification using an SEM to demonstrate the fibrous nature of the FlexiCap™ termination that absorbs increased levels of mechanical stress.

AVAILABLE ON THE FOLLOWING RANGES:

- All High Reliability Ranges
- Standard and High Voltage Capacitors
- Open Mode and Tandem Capacitors
- Safety Certified Capacitors
- Non-Magnetic Capacitors
- 3-Terminal EMI Chips
- X2Y Integrated Passive Components
- X8R High Temperature Capacitors

SUMMARY OF PCB BEND TEST RESULTS

The bend tests conducted on X7R (2R1) have proven that the FlexiCap™ termination withstands a greater level of mechanical stress before mechanical cracking occurs. The AEC-Q200 test for X7R (2R1) requires a bend level of 2mm minimum and a cap change of less than 10%. Knowles test to a minimum bend of 5mm for X7R with FlexiCap termination, and for COG with either FlexiCap or standard termination.

| Product X7R (2R1) | Typical bend performance under AEC-Q200 test conditions |
|----------------------|---|
| Standard termination | 2mm to 3mm |
| FlexiCap™ | Typically 8mm to 10mm |

APPLICATION NOTES

FlexiCap™ may be handled, stored and transported in the same manner as standard terminated capacitors. The requirements for mounting and soldering FlexiCap™ are the same as for standard SMD capacitors. For customers currently using standard terminated capacitors there should be no requirement to change the assembly process when converting to FlexiCap™.

Based upon board bend tests in accordance with IEC 60384-1, the amount of board bending required to mechanically crack a FlexiCap™ terminated capacitor is significantly increased compared with standard terminated capacitors. It must be stressed, however, that capacitor users must not assume that the use of FlexiCap™ terminated capacitors will totally eliminate mechanical cracking. Good process controls are still required for this objective to be achieved.



IECQ-CECC and AEC-Q200 Tests

PERIODIC TESTS CONDUCTED FOR IECQ-CECC AND AEC-Q200

| Test ref | Test | Termination type | Additional requirements | Sample acceptance | | | Reference |
|----------|---|---|--|-------------------|----|---|-------------------------------|
| | | | | P | N | C | |
| P1 | High temperature exposure (storage) | All types | Un-powered. 1,000 hours @ T=150°C. Measurement at 24 ± 2 hours after test conclusion. | 12 | 77 | 0 | MIL-STD-202 Method 108 |
| P2 | Temperature cycling | COG/NP0 (1B); All types X7R (2R1); Y and H only | 1,000 cycles -55°C to +125°C Measurement at 24 ± 2 hours after test conclusion. | 12 | 77 | 0 | JESD22 Method JA-104 |
| P3 | Moisture resistance | All types | T = 24 hours/cycle. Note: Steps 7a and 7b not required. Unpowered. Measurement at 24 ± 2 hours after test conclusion. | 12 | 77 | 0 | MIL-STD-202 Method 106 |
| P4 | Biased humidity | All types | 1,000 hours 85°C/85%RH. Rated voltage or 50V whichever is the least and 1.5V. Measurement at 24 ± 2 hours after test conclusion. | 12 | 77 | 0 | MIL-STD-202 Method 103 |
| P5 | Operational life | All types | Condition D steady state TA=125°C at full rated. Measurement at 24 ± 2 hours after test conclusion. | 12 | 77 | 0 | MIL-STD-202 Method 108 |
| P6 | Resistance to solvents | All types | Note: Add aqueous wash chemical. Do not use banned solvents. | 12 | 5 | 0 | MIL-STD-202 Method 215 |
| P7 | Mechanical shock | COG/NP0 (1B); All types X7R (2R1); Y and H only | Figure 1 of Method 213. Condition F | 12 | 30 | 0 | MIL-STD-202 Method 213 |
| P8 | Vibration | COG/NP0 (1B); All types X7R (2R1); Y and H only | 5g's for 20 minutes, 12 cycles each of 3 orientations. Note: Use 8" x 5" PCB 0.031" thick 7 secure points on one long side and 2 secure points at corners of opposite sides. Parts mounted within 2" from any secure point. Test from 10-2,000Hz. | 12 | 30 | 0 | MIL-STD-202 Method 204 |
| P9 | Resistance to soldering heat | All types | Condition B, no pre-heat of samples: Single wave solder - Procedure 2 | 3 | 12 | 0 | MIL-STD-202 Method 210 |
| P10 | Thermal shock | COG/NP0 (1B); All types X7R (2R1); Y and H only | -55°C/+125°C. Number of cycles 300. Maximum transfer time - 20 seconds, dwell time - 15 minutes. Air-Air. | 12 | 30 | 0 | MIL-STD-202 Method 107 |
| P11 | Adhesion, rapid temp change and climatic sequence | X7R (2R1); A, F and J only | 5N force applied for 10s, -55°C/+125°C for 5 cycles, damp heat cycles | 12 | 27 | 0 | BS EN 60384-1 Clause 8.1, 8.2 |
| P12 | Board flex | COG/NP0 (1B); All types X7R (2R1); Y and H only | 3mm deflection Class I 2mm deflection Class II | 12 | 30 | 0 | AEC-Q200-005 |
| P13 | Board flex | X7R (2R1); A, F and J only | 1mm deflection | 12 | 12 | 0 | BS EN 60384-1 Clause 7.8 |
| P14 | Terminal strength | All types | Force of 1.8kg for 60 seconds | 12 | 30 | 0 | AEC-Q200-006 |
| P15 | Beam load test | All types | - | 12 | 30 | 0 | AEC-Q200-003 |
| P16 | Damp heat steady state | All types | 56 days, 40°C/93% RH 15x no volts, 15x 5Vdc, 15x rated voltage or 50V whichever is the least | 12 | 45 | 0 | BS EN 60384-1 Clause 8.3 |


Test results are available on request.

P = Period in months. N = Sample size. C = Acceptance criteria.




Manufacturing Process

PRODUCTION PROCESS FLOWCHART

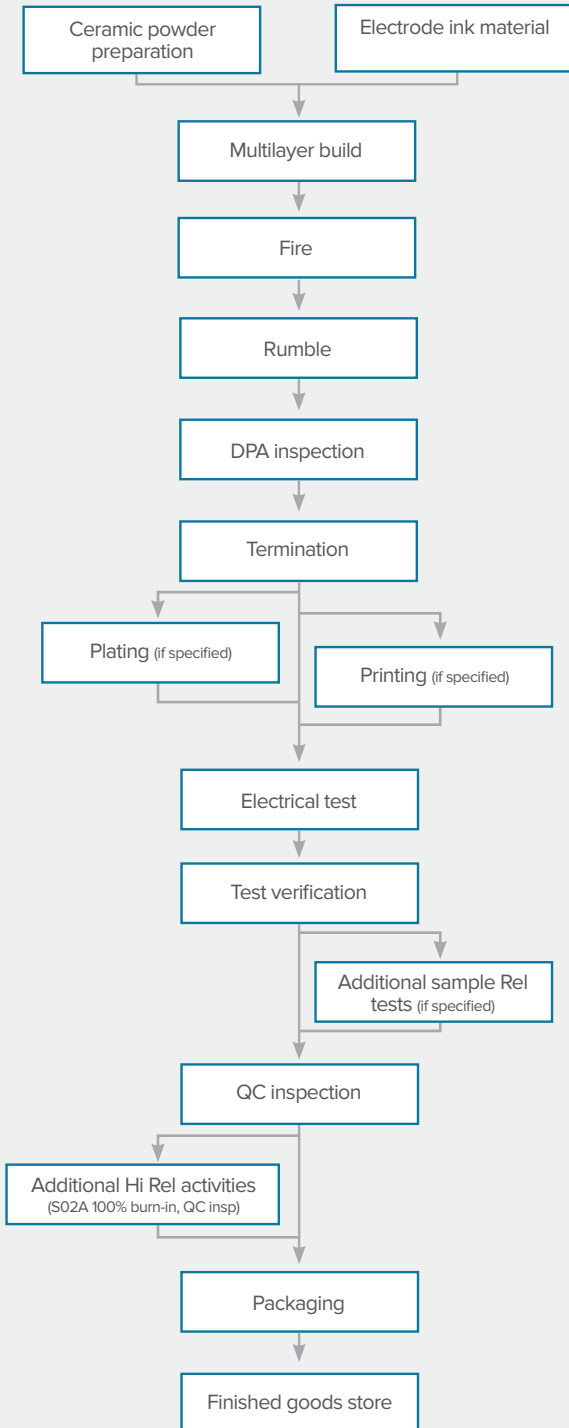


KNOWLES RELIABILITY GRADES

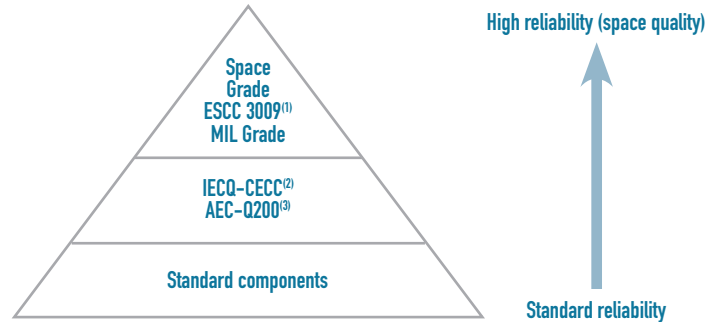

Notes:

- 1) Space grade tested in accordance with ESCC3009 (refer to Knowles Spec S02A 0100) or MIL Grade (in accordance with MIL-PRF-123, MILPRF-55681).
- 2) IECQ-CECC. The International Electrotechnical Commission (IEC) Quality Assessment System for Electronic Components. This is an internationally recognized product quality certification that provides customers with assurance that the product supplied meets high-quality standards. View Knowles IECQ-CECC approvals at iecq.org or at knowlesc capacitors.com
- 3) AEC-Q200. Automotive Electronics Council Stress Test Qualification For Passive Components. Refer to Knowles application note AN0009.

KNOWLES RELIABILITY SURFACE MOUNT PRODUCT GROUPS

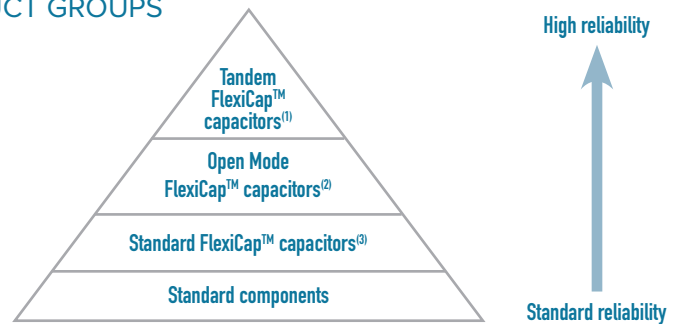

Notes:

- 1) "Tandem" construction capacitors, i.e., internally having the equivalent of two series capacitors. If one of these should fail or short circuit, there is still capacitance end to end and the chip will still function as a capacitor, although capacitance may be affected. Refer to application note AN0021. Also available qualified to AEC-Q200.
- 2) "Open Mode" capacitors with FlexiCap™ termination also reduce the possibility of a short circuit by utilizing inset electrode margins. Refer to application note AN0022. Also available qualified to AEC-Q200.
- 3) Multilayer capacitors with Knowles FlexiCap™ termination. By using FlexiCap™ termination, there is a reduced possibility of the mechanical cracking occurring.
- 4) "Standard" capacitors include MLCCs with tin finish over nickel but no FlexiCap™.

Testing

TESTS CONDUCTED DURING BATCH MANUFACTURE

KNOWLES RELIABILITY SM PRODUCT GROUP

| | Standard SM capacitors | IECQ-CECC/ MIL grade | AEC-Q200 | S (Space grade) High Rel SO2A ESCC 3009 MIL-PRF-123 |
|--|------------------------|-------------------------|----------|---|
| Solderability | ● | ● | ● | ● |
| Resistance to soldering heat | ● | ● | ● | ● |
| Plating thickness verification (if plated) | ● | ● | ● | ● |
| DPA (Destructive Physical Analysis) | ● | ● | ● | ● |
| Voltage proof test (DWV/Flash) | ● | ● | ● | ● |
| Insulation resistance | ● | ● | ● | ● |
| Capacitance test | ● | ● | ● | ● |
| Dissipation factor test | ● | ● | ● | ● |
| 100% visual inspection | ● | ● | ● | ● |
| 100% burn-in | ● | ● | ● | ● |
| Load sample test @ 125°C | ● | ● | ● | LAT1 & LAT2 (1000 hours) |
| Humidity sample test. 85°C/85%RH | ● | ● | ● | 240 hours |
| Hot IR sample test | ● | ● | ● | ● |
| Axial pull sample test (MIL-STD-123) | ● | ● | ● | ● |
| Breakdown voltage sample test | ● | ● | ● | ● |
| Deflection (bend) sample test | ● | ● | ● | ● |
| SAM (Scanning Acoustic Microscopy) | ● | ● | ● | ● |
| LAT1 (4 x adhesion, 8 x rapid temp change + LAT2 and LAT3) | - | - | - | ● |
| LAT2 (20 x 1000 hour life test + LAT3) | - | - | - | ● |
| LAT3 (6 x TC and 4 x solderability) | - | - | - | ● |

- Test conducted as standard.
- Optional test. Please discuss with the Knowles Precision Devices sales office.



Regulations and Compliance

RELEASE DOCUMENTATION

KNOWLES PRECISION DEVICES RELIABILITY SM PRODUCT GROUP

| | Standard SM capacitors | IECQ-CECC | AEC-Q200 MIL grade | S (Space grade) High Rel S02A |
|---|------------------------|-----------|--------------------|-------------------------------|
| Certificate of conformance | ● | - | ● | ● |
| IECQ-CECC Release certificate of conformity | - | ● | - | - |
| Batch electrical test report | ● | ● | ● | Included in data pack |
| S (space grade) data documentation package | - | - | - | ● |

● Release documentation supplied as standard. ● Original documentation.

PERIODIC TESTS CONDUCTED AND RELIABILITY DATA AVAILABILITY

STANDARD SURFACE MOUNT CAPACITORS

Components are randomly selected on a sample basis and the following routine tests are conducted:

- Load Test. 1,000 hours @125°C (150°C for X8R). Applied voltage depends on components tested.
- Humidity Test. 168 hours @ 85°C/85% RH.
- Board Deflection (bend test).

Test results are available on request.


CONVERSION FACTORS

| From | To | Operation |
|------|--------------|---------------------------------------|
| FITS | MTBF (hours) | $10^9 \div \text{FITS}$ |
| FITS | MTBF (years) | $10^9 \div (\text{FITS} \times 8760)$ |

FITS = Failures in 10^9 hours.

MTBF = Mean time between failures.

EXAMPLE OF FIT (FAILURE IN TIME) DATA AVAILABLE:

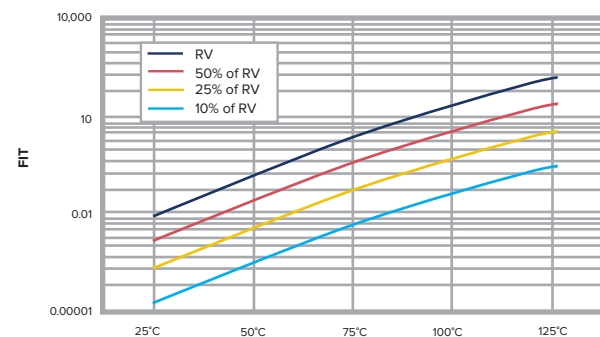

Component type: 0805 (COG/NPO (1B) and X7R (2R1)).

Testing location: Knowles PD reliability test department.

Results based on: 16,622,000 component test hours.

REGISTRATION, EVALUATION, AUTHORIZATION AND RESTRICTION OF CHEMICALS (REACH)

The main purpose of REACH is to improve the protection of human health and the environment from the risks arising from the use of chemicals. Knowles maintains both ISO14001 Environmental Management System and OHSAS 18001 Health and Safety Management System approvals that require and ensure compliance with corresponding legislation such as REACH. For further information, please contact the Knowles Precision Devices Sales Office at knowlescapacitors.com

ROHS COMPLIANCE

Knowles routinely monitors worldwide material restrictions (e.g., EU/China and Korea RoHS mandates) and is actively involved in shaping future legislation.

All standard COG/NPO (1B), X7R (2R1), X5R, X8R, X8G and High Q Knowles MLCC products are 100% lead free and compliant with the EU RoHS directive. Those with plated terminations are suitable for soldering using common lead-



free solder alloys (refer to "Soldering Information" for more details on soldering limitations). Compliance with the EU RoHS directive automatically signifies compliance with some other legislation (e.g., China and Korea RoHS). Please refer to the Knowles Precision Devices Sales Office for details of compliance with other materials legislation.

Breakdown of material content, SGS analysis reports and tin whisker test results are available on request.

Most Knowles PD MLCC components are available with non-RoHS compliant tin lead (SnPb) solderable termination finish for exempt applications and where pure tin is not acceptable. Other tin free termination finishes may also be available – please refer to knowlescapacitors.com Sales Office for further details. Environmental certificates can be downloaded from the Knowles Precision Devices website.

EXPORT CONTROLS AND DUAL-USE REGULATIONS

Certain Knowles catalog components are defined as "dual-use" items under international export controls — those that can be used for civil or military purposes which meet certain specified technical standards. The defining criteria for a dual-use component with respect to Knowles capacitor products is one with a voltage rating of >750Vdc, a capacitance value of >250nF when measured at 750Vdc, and a series inductance <10nH. Components defined as dual use under the above criteria may require a license for export across international borders. Please contact the Sales Office for further information on specific part numbers.

Explanation of Aging of MLC

AGING

Capacitor aging is a term used to describe the negative, logarithmic capacitance change that takes place in ceramic capacitors with time. The crystalline structure for barium titanate based ceramics changes on passing through its Curie temperature (known as the Curie Point, at about 125°C. This domain structure relaxes with time and in doing so, the dielectric constant reduces logarithmically; this is known as the aging mechanism of the dielectric constant. The more stable dielectrics have the lowest aging rates.


The aging process is reversible and repeatable. Whenever the capacitor is heated to a temperature above the Curie Point, the aging process starts again from zero.

The aging constant, or aging rate, is defined as the percentage loss of capacitance due to the aging process of the dielectric that occurs during a decade of time (a tenfold increase in age) and is expressed as percent per logarithmic decade of hours. As the law of decrease of capacitance is logarithmic, this means that in a capacitor with an aging rate of 1% per decade of time, the capacitance will decrease at a rate of:

- a) 1% between 1 and 10 hours
- b) An additional 1% between the following 10 and 100 hours
- c) An additional 1% between the following 100 and 1,000 hours
- d) An additional 1% between the following 1,000 and 10,000 hours, etc.
- e) The aging rate continues in this manner throughout the capacitor's life.

Typical values of the aging constant for our Multilayer Ceramic Capacitors are:

| Dielectric class | Typical values |
|---------------------------|---|
| Ultra Stable COG/NPO (1B) | Negligible capacitance loss through aging |
| Stable X7R (2R1) | <2% per decade of time |

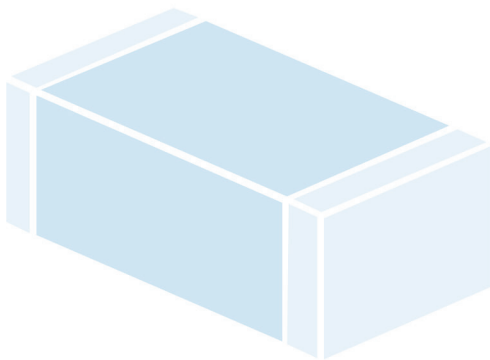

CAPACITANCE MEASUREMENTS


Because of aging it is necessary to specify an age for reference measurements at which the capacitance shall be within the prescribed tolerance. This is fixed at 1,000 hours, since for practical purposes there is not much further loss of capacitance after this time.

All capacitors shipped are within their specified tolerance at the standard reference age of 1,000 hours after having cooled through their Curie temperature.

The aging curve for any ceramic dielectric is a straight line when plotted on semi-log paper.

CAPACITANCE vs. TIME


(Aging X7R (2R1) @ <2% per decade)

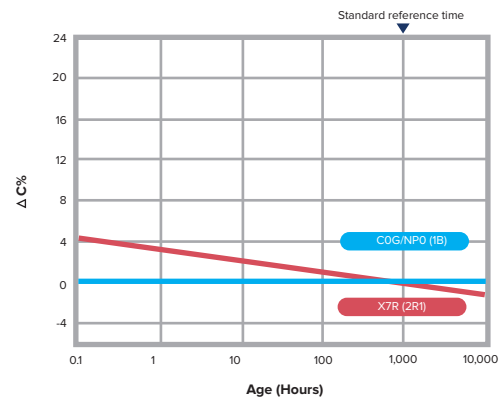

TIGHT TOLERANCE

One of the advantages of Knowles' unique "wet process" of manufacture is the ability to offer capacitors with exceptionally tight capacitance tolerances.

The accuracy of the printing screens used in the fully automated, computer controlled manufacturing process allows for tolerance as close as +/-1% on COG/NPO (1B) parts greater than or equal to 10pF. For capacitance values below <4.7pF, tolerances can be as tight as +/-0.05pF.

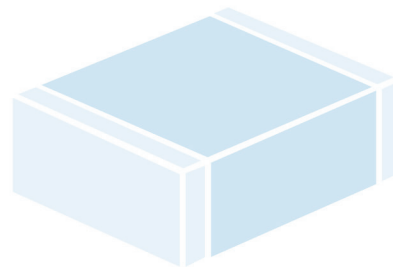

Mounting, Soldering, Storage and Mechanical Precautions

Knowles Precision Devices' MLCCs are compatible with all recognized soldering/ mounting methods for chip capacitors.

MECHANICAL CONSIDERATIONS FOR MOUNTING MLCCS

Due to their brittle nature, ceramic chip capacitors are more prone to excesses of mechanical stress than other components used in surface mounting.

One of the most common causes of failure is directly attributable to bending the printed circuit board after solder attachment. The excessive or sudden movement of the flexible circuit board stresses the inflexible ceramic block, causing a crack to appear at the weakest point, usually the ceramic/termination interface. The crack may initially be quite small and not penetrate into the inner electrodes; however, subsequent handling and rapid changes in temperature may cause the crack to enlarge. This mode of failure is often invisible to normal inspection techniques as the resultant cracks usually lie under the capacitor terminations, but if left, can lead to catastrophic failure. More importantly, mechanical cracks, unless they are severe, may not be detected by normal electrical testing of the completed circuit, failure only occurring at some later stage after moisture ingress. The degree of mechanical stress generated on the printed circuit board is dependent upon several factors, including the board material and thickness; the amount of solder and land pattern. The amount of solder applied is important, as an excessive amount reduces the chip's resistance to cracking.

It is Knowles' experience that more than 90% are due to board depanelization, a process where two or more circuit boards are separated after soldering is complete.

Other manufacturing stages that should be reviewed include:

- 1) Attaching rigid components such as connectors, relays, display panels, heat sinks, etc.
- 2) Fitting conventional leaded components. Special care must be exercised when rigid terminals, as found on large can electrolytic capacitors, are inserted.
- 3) Storage of boards in such a manner that allows warping.
- 4) Automatic test equipment, particularly the type employing "bed of nails" and support pillars.
- 5) Positioning the circuit board in its enclosure, especially where this is a "snap-fit".

Knowles was the first MLCC manufacturer to launch a flexible termination to significantly reduce the instances of mechanical cracking. FlexiCap™ termination introduces a certain amount of give into the termination layer, absorbing damaging stress. Unlike similar systems, FlexiCap™ does not tear under tension, but absorbs the stress, so maintaining the characteristics of the MLCC.

SM PAD DESIGN

Knowles conventional 2-terminal chip capacitors can generally be mounted using pad designs in accordance with IPC-7351, Generic Requirements for Surface Mount Design and Land Pattern Standards, but there are some other factors that have been shown to reduce mechanical stress, such as reducing the pad width to less than the chip width. In addition, the position of the chip on the board should also be considered. 3-Terminal components are not specifically covered by IPC-7351, but recommended pad dimensions are included in the Knowles catalog/website for these components.

SOLDERING SURFACE MOUNT CHIP CAPACITORS

Please see application note AN0028 "Soldering/Mounting Chip Capacitors, Radial Leaded Capacitors and EMI Filters" located at: <http://www.knowlesc capacitors.com/Resources>.

The volume of solder applied to the chip capacitor can influence the reliability of the device. Excessive solder can create thermal and tensile stresses on the component, which can lead to fracturing of the chip or the solder joint itself. Insufficient or uneven solder application can result in weak bonds, rotation of the device off line or lifting of one terminal off the pad (tombstoning). The volume of solder is process and board pad size dependent.

Soldering methods commonly used in industry are Reflow Soldering, Wave Soldering and, to a lesser extent, Vapor Phase Soldering. All these methods involve thermal cycling of the components and therefore the rate of heating and cooling must be controlled to preclude thermal shocking of the devices. Without mechanical restriction, thermally induced stresses are released once the capacitor attains a steady state condition. Capacitors bonded to substrates, however, will retain some stress, due primarily to the mismatch of expansion of the component to the substrate; the residual stress on the chip is also influenced by the ductility and hence the ability of the bonding medium to relieve the stress. Unfortunately, the thermal expansion of chip capacitors differs significantly from those of most substrate materials. Large chips are more prone to thermal shock as their greater bulk will result in sharper thermal gradients within the device during thermal cycling. Large units experience excessive stress if processed through the fast cycles typical of solder wave or vapor phase operations.

REFLOW SOLDERING SURFACE MOUNT CHIP CAPACITORS

Knowles recommends reflow soldering as the preferred method for mounting MLCCs. KPD MLCCs can be reflow soldered using a reflow profile generally as defined in IPC/ EDEC J-STD-020. Sn plated termination chip capacitors are compatible with both conventional and lead-free soldering, with peak temperatures of 260°C to 270°C acceptable. The heating ramp rate should be such that components see a temperature rise of 1.5°C to 4°C per second to maintain temperature uniformity throughout the MLCC. The time for which the solder is molten should be maintained at a minimum, so as to prevent solder leaching. Extended times above 230°C can cause problems with oxidation of Sn plating. Use of inert atmosphere can help if this problem is encountered. PdAg terminations can be particularly susceptible to leaching with lead-free, tin-rich solders and trials are recommended for this combination. Cooling to ambient temperature should be allowed to occur naturally, particularly if larger chip sizes are being soldered. Natural cooling allows a gradual relaxation of thermal mismatch stresses in the solder joints. Forced cooling should be avoided as this can induce thermal breakage.

WAVE SOLDERING SURFACE MOUNT CHIP CAPACITORS

Wave soldering is generally acceptable, but the thermal stresses caused by the wave have been shown to lead to potential problems with larger or thicker chips. Particular care should be taken when soldering SM chips larger than size 1210 and with a thickness greater than 1.0mm for this reason. 0402 size components are not suitable for wave soldering. 0402 size components can also be susceptible to termination leaching and reflow soldering is recommended for this size MLCC. Wave soldering exposes the devices to a large solder volume, hence the pad size area must be restricted to accept an amount of solder that is not detrimental to the chip size utilized. Typically the pad width is 66% of the component width, and the length is .030" (760mm) longer than the termination band on the chip. An 0805 chip that is .050" wide and has a .020" termination band therefore requires a pad



Mounting, Soldering, Storage and Mechanical Precautions

.033" wide by .050" in length. Opposing pads should be identical in size to preclude uneven solder fillets and mismatched surface tension forces, which can misalign the device. It is preferred that the pad layout results in alignment of the long axis of the chips at right angles to the solder wave, to promote even wetting of all terminals. Orientation of components in line with the board travel direction may require dual waves with solder turbulence to preclude cold solder joints on the trailing terminals of the devices, as these are blocked from full exposure to the solder by the body of the capacitor.

The preheat ramp should be such that the components see a temperature rise of 1.5°C to 4°C per second as for reflow soldering. This is to maintain temperature uniformity throughout the MLCC and prevent the formation of thermal gradients within the ceramic. The preheat temperature should be within 120°C maximum (100°C preferred) of the maximum solder temperature to minimize thermal shock. Maximum permissible wave temperature is 270°C for SM chips. Total immersion exposure time for Sn/Ni terminations is 30s at a wave temperature of 260°C. Note that for multiple soldering operations, including the rework, the soldering time is cumulative. The total immersion time in the solder should be kept to a minimum. It is strongly recommended that plated terminations are specified for wave soldering applications. PdAg termination is particularly susceptible to leaching when subjected to lead-free wave soldering and is not generally recommended for this application.

Cooling to ambient temperature should be allowed to occur naturally, particularly if larger chip sizes are being soldered. Natural cooling allows a gradual relaxation of thermal mismatch stresses in the solder joints. Forced cooling should be avoided as this can induce thermal breakage.

VAPOR PHASE SOLDERING CHIP CAPACITORS

Vapor phase soldering, can expose capacitors to similar thermal shock and stresses as wave soldering and the advice is generally the same. Particular care should be taken in soldering large capacitors to avoid thermal cracks being induced and natural cooling should be used to allow a gradual relaxation of stresses.

HAND SOLDERING AND REWORK OF CHIP CAPACITORS

Attachment using a soldering iron requires extra care and is accepted to have a risk of cracking the chip. Precautions include preheating of the assembly to within 100°C of the solder flow temperature and the use of a fine tip iron that does not exceed 30 watts. In no circumstances should the tip of the iron be allowed to contact the chip directly. KPD recommends hot air/gas as the preferred method for applying heat for rework. Apply even heat surrounding the component to minimize internal thermal gradients. Minimize the rework heat duration and allow components to cool naturally after soldering.

SOLDER LEACHING

Leaching is the term for the dissolution of silver into the solder, causing a failure of the termination system, which causes increased ESR, $\tan \delta$ and open circuit faults, including, ultimately, the possibility of the chip becoming detached. Leaching occurs more readily with higher temperature solders and solders with a high tin content. Pb-free solders can be very prone to leaching certain termination systems. To prevent leaching, exercise care when choosing solder alloys and minimize both maximum temperature and dwell time with the solder molten. Plated terminations with nickel or copper anti-leaching barrier layers are available in a range of top coat finishes to prevent leaching from occurring. These finishes also include Syfer FlexiCap™ for improved stress resistance post soldering.

BONDING

Hybrid assembly using conductive epoxy or wire bonding requires the use of silver palladium or gold terminations. Nickel barrier termination is not practical in these applications, as intermetallics will form between the dissimilar metals. The ESR will increase over time and may eventually break contact when exposed to temperature cycling.

CLEANING

Chip capacitors can withstand common agents such as water, alcohol and degreaser solvents used for cleaning boards. Ascertain that no flux residues are left on the chip surfaces as these diminish electrical performance.

HANDLING

Ceramics are dense, hard, brittle and abrasive materials. They are liable to suffer mechanical damage, in the form of chips or cracks, if improperly handled. Terminations may be abraded onto chip surfaces if loose chips are tumbled in bulk. Metallic tracks may be left on the chip surfaces which might pose a reliability hazard. Components should never be handled with fingers; perspiration and skin oils can inhibit solderability and will aggravate cleaning. Chip capacitors should never be handled with metallic instruments. Metal tweezers should never be used as these can chip the product and may leave abraded metal tracks on the product surface. Plastic or plastic coated metal types are readily available and recommended — these should be used with an absolute minimum of applied pressure. Counting or visual inspection of chip capacitors is best performed on a clean glass or hard plastic surface. If chips are dropped or subjected to rough handling, they should be visually inspected before use. Electrical inspection may also reveal gross damage via a change in capacitance, an increase in dissipation factor or a decrease either in insulation resistance or electrical strength.

TRANSPORTATION

Where possible, any transportation should be carried out with the product in its unopened original packaging. If already opened, any environmental control agents supplied should be returned to packaging and the packaging resealed. Avoid paper and card as a primary means of handling, packing, transportation and storage of loose components. Many grades have a sulphur content that will adversely affect termination solderability. Loose chips should always be packed with sulphur-free wadding to prevent impact or abrasion damage during transportation.

STORAGE

Incorrect storage of components can lead to problems for the user. Rapid tarnishing of the terminations, with an associated degradation of solderability, will occur if the product comes into contact with industrial gases such as sulphur dioxide and chlorine. Storage in free air, particularly moist or polluted air, can result in termination oxidation.



Packaging should not be opened until the MLCCs are required for use. If opened, the pack should be resealed as soon as is practicable. Alternatively, the contents could be kept in a sealed container with an environmental control agent. Long-term storage conditions, ideally, should be temperature controlled between -5°C and +40°C and humidity controlled between 40% and 60% RH. Taped product should be stored out of direct sunlight, which might promote deterioration in tape or adhesive performance. Product, stored under the conditions recommended above, in its "as received" packaging, has a minimum shelf life of 2 years.



Ceramic Chip Capacitors

Packaging Information

Tape and reel packing of surface mounting chip capacitors for automatic placement are in accordance with IEC60286-3.

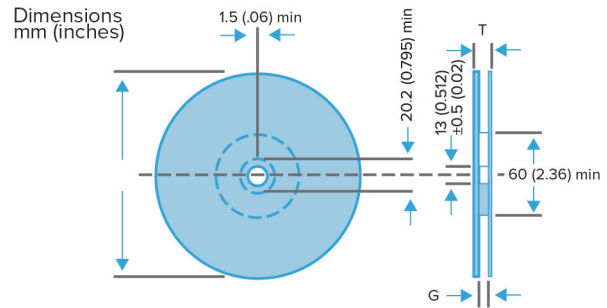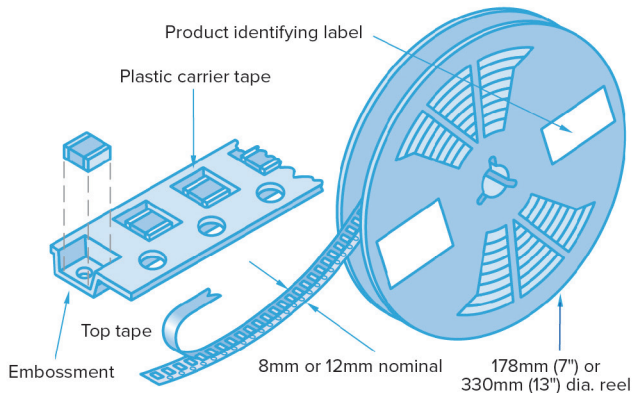

DIMENSIONS MM (INCHES)

| Symbol | Description | 178mm reel | 330mm reel |
|--------|---------------|-----------------|-----------------|
| A | Diameter | 178 (7) | 330 (13) |
| G | Inside width | 8.4 (0.33) | 12.4 (0.49) |
| T | Outside width | 14.4 (0.56) max | 18.4 (0.72) max |

PEEL FORCE

The peel force of the top sealing tape is between 0.2 and 1.0 Newton at 180°. The breaking force of the carrier and sealing tape in the direction of unreeling is greater than 10 Newtons.


IDENTIFICATION

Each reel is labeled with the following information: manufacturer, chip size, capacitance, tolerance, rated voltage, dielectric type, batch number, date code and quantity of components.


MISSING COMPONENTS

Maximum number of missing components shall be 1 per reel or 0.025%, whichever is greater. There shall not be consecutive components missing from any reel for any reason.

LEADER AND TRAILER

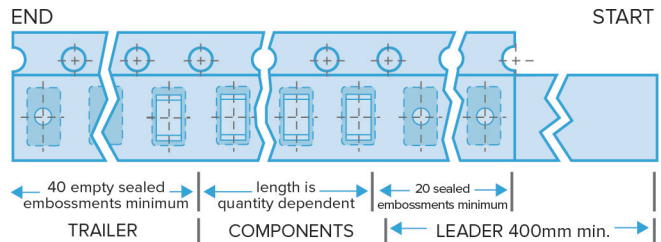

TAPE DIMENSIONS

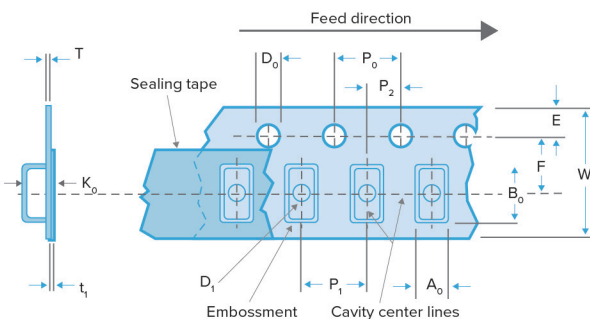

| Symbol | Description | Dimensions mm (inches) | |
|-----------------|--|---|---------------------------|
| | | 8mm tape | 12mm tape |
| A_0, B_0, K_0 | Width of cavity, Length of cavity, Depth of cavity | Dependent on chip size to minimize rotation | |
| W | Width of tape | 8.0 (0.315) | 12.4 (0.472) |
| F | Distance between drive hole centers and cavity centers | 3.5 (0.138) | 5.5 (0.213) |
| E | Distance between drive hole centers and tape edge | 1.75 (0.069) | |
| P_1 | Distance between cavity centers | 4.0 (0.156) | 8.0 (0.315) |
| P_2 | Axial distance between drive hole centers and cavity centers | 2.0 (0.079) | |
| P_0 | Axial distance between drive hole centers | 4.0 (0.156) | |
| D_0 | Drive hole diameter | 1.5 (0.059) | |
| D_1 | Diameter of cavity piercing | 1.0 (0.039) | 1.5 (0.059) |
| T | Carrier tape thickness | 0.3 (0.012) ± 0.1 (0.004) | 0.4 (0.016) ± 0.1 (0.004) |
| t_1 | Top tape thickness | 0.1 (0.004) max | |



Ceramic Chip Capacitors


Packaging Information

COMPONENT ORIENTATION

Tape and reeling is in accordance with IEC 60286 part 3, which defines the packaging specifications of lead-less components on continuous tapes.

Notes:

- 1) IEC60286-3 states $A_o \leq B_o$
(see tape dimensions on page 15).
- 2) Regarding the orientation of 1825 and 2225 components, the termination bands are right to left, NOT front to back. Please see diagram.

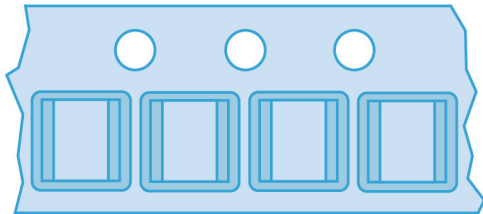


Orientation of 1825 & 2225 components

OUTER PACKAGING

OUTER CARTON DIMENSIONS MM (INCHES) MAX.

| Reel Size | No. of reels | L | W | T |
|------------|--------------|-------------|-------------|-----------|
| 178 (7.0) | 1 | 185 (7.28) | 185 (7.28) | 25 (0.98) |
| 178 (7.0) | 4 | 190 (7.48) | 195 (7.76) | 75 (2.95) |
| 330 (13.0) | 1 | 335 (13.19) | 335 (13.19) | 25 (0.98) |

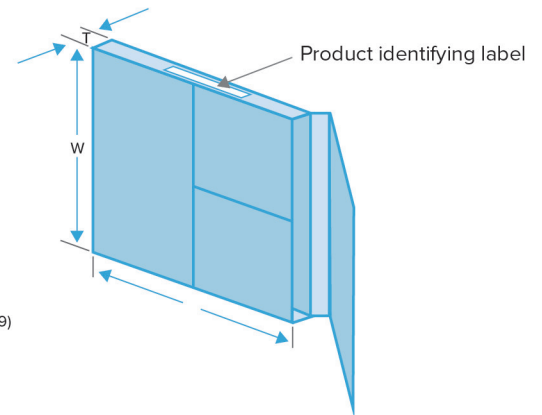

Note: Labeling of box and reel with bar codes (Code 39) available by arrangement.

MAXIMUM REEL QUANTITIES


| Chip size | 0402 | 0603 | 0805 | 1206 | 1210 (T = 2.0mm) | 1210 (T = 2.2mm) | 1808 | 1812 | 1825 | 2211 | 2215 | 2220 | 2225 | 3640 | 5550 | 8060 |
|-----------------|------|-------|-------|-------|---------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|------|------|------|
| Reel quantities | | | | | | | | | | | | | | | | |
| 178mm (7") | 10k | 4,000 | 3,000 | 2,500 | 2,000 | 1,500 | 1,500 | 500 | 500 | 750* | 500 | 500 | 500 | - | - | - |
| 330mm (13") | 15k | 16k | 12k | 10k | 8,000 | 6,000 | 6,000 | 2,000 | 2,000 | 2,000 | 2,000 | 2,000 | 2,000 | 500 | - | - |

*For 2211 Enhanced AC Safety Capacitors, 178mm (7") reel quantity is 500.

BULK PACKAGING, TUBS


Chips can be supplied in rigid resealable plastic tubs together with impact cushioning wadding. Tubs are labeled with the details: chip size, capacitance, tolerance, rated voltage, dielectric type, batch number, date code and quantity of components.

| Dimensions mm (inches) | |
|------------------------|-----------|
| H | 60 (2.36) |
| D | 50 (1.97) |

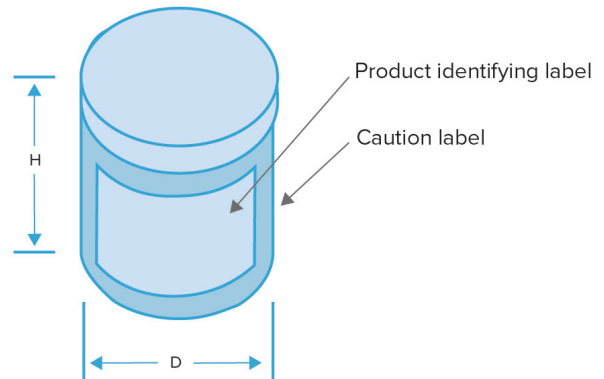

Chip Dimensions

1. For maximum chip thicknesses, refer to individual range tables in this catalog.
2. Non-standard thicknesses are available – consult your local Knowles Precision Devices sales office.
3. For special ranges, e.g., AC Safety Capacitors and Surface Mount EMI Filters, dimensions may vary. See individual catalog page.

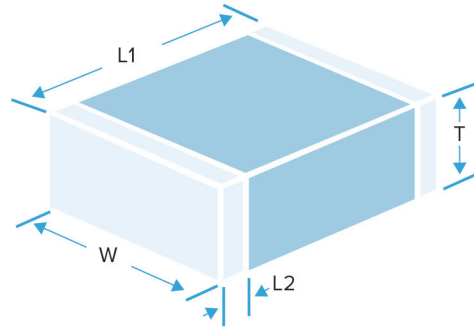

| Case Size | Length (L1) Parts with standard termination mm (inches) | Length (L1) Parts with polymer termination mm (inches) | Width (W) mm (inches) | Termination Band (L2) | |
|-----------|---|--|------------------------------|-----------------------|---------------------|
| | | | | Minimum mm (inches) | Maximum mm (inches) |
| 0402 | 1.0 ± 0.10 (0.040 ± 0.004) | 1.0 +0.20/-0.10 (0.04 +0.008/-0.004) | 0.50 ± 0.10 (0.02 ± 0.004) | 0.10 (0.004) | 0.40 (0.016) |
| 0603 | 1.6 ± 0.15 (0.063 ± 0.006) | 1.6 +0.25/-0.15 (0.063 +0.01/-0.006) | 0.8 ± 0.15 (0.032 ± 0.006) | 0.20 (0.008) | 0.40 (0.016) |
| 0805 | 2.0 ± 0.20 (0.079 ± 0.008) | 2.0 +0.30/-0.20 (0.079 +0.012/-0.008) | 1.25 ± 0.20 (0.049 ± 0.008) | 0.25 (0.01) | 0.75 (0.030) |
| 1206 | 3.2 ± 0.20 (0.126 ± 0.008) | 3.2 +0.30/-0.20 (0.126 +0.012/-0.008) | 1.6 ± 0.20 (0.063 ± 0.008) | 0.25 (0.01) | 0.75 (0.030) |
| 1210 | 3.2 ± 0.20 (0.126 ± 0.008) | 3.2 +0.30/-0.20 (0.126 +0.012/-0.008) | 2.5 ± 0.20 (0.098 ± 0.008) | 0.25 (0.01) | 0.75 (0.030) |
| 1808 | 4.5 ± 0.35 (0.180 ± 0.014) | 4.5 +0.45/-0.35 (0.180 +0.018/-0.014) | 2.0 ± 0.30 (0.08 ± 0.012) | 0.25 (0.01) | 1.0 (0.04) |
| 1812 | 4.5 ± 0.30 (0.180 ± 0.012) | 4.5 +0.40/-0.30 (0.180 +0.016/-0.012) | 3.2 ± 0.20 (0.126 ± 0.008) | 0.25 (0.01) | 1.143 (0.045) |
| 1825 | 4.5 ± 0.30 (0.180 ± 0.012) | 4.5 +0.40/-0.30 (0.180 +0.016/-0.012) | 6.40 ± 0.40 (0.252 ± 0.016) | 0.25 (0.01) | 1.0 (0.04) |
| 2211 | 5.7 ± 0.40 (0.225 ± 0.016) | 5.7 +0.50/-0.40 (0.225 +0.02/-0.016) | 2.79 ± 0.30 (0.11 ± 0.012) | 0.25 (0.01) | 0.8 (0.03) |
| 2220 | 5.7 ± 0.40 (0.225 ± 0.016) | 5.7 +0.50/-0.40 (0.225 +0.02/-0.016) | 5.0 ± 0.40 (0.197 ± 0.016) | 0.25 (0.01) | 1.0 (0.04) |
| 2225 | 5.7 ± 0.40 (0.225 ± 0.016) | 5.7 +0.50/-0.40 (0.225 +0.02/-0.016) | 6.30 ± 0.40 (0.252 ± 0.016) | 0.25 (0.01) | 1.143 (0.045) |
| 3640 | 9.2 ± 0.50 (0.360 ± 0.02) | 9.2 +0.60/-0.50 (0.36 +0.024/-0.02) | 10.16 ± 0.50 (0.40 ± 0.02) | 0.50 (0.02) | 1.50 (0.06) |
| 5550 | 14.0 ± 0.711 (0.550 ± 0.028) | 14.0 +0.811/-0.711 (0.550 +0.032/-0.028) | 12.7 ± 0.635 (0.500 ± 0.025) | 0.50 (0.02) | 1.50 (0.06) |
| 8060 | 20.3 ± 0.5 (0.800 ± 0.02) | 20.3 +0.60/-0.50 (0.80 +0.024/-0.02) | 15.24 ± 0.50 (0.60 ± 0.02) | 0.50 (0.02) | 1.50 (0.06) |



COG/NPO (1B) — AEC-Q200 and Standard Ranges

COG/NPO (1B) — AEC-Q200 AND STANDARD RANGES — CAPACITANCE VALUES

| | COG/NPO (1B) | 0402 | 0603 | 0805 | 1206 | 1210 | 1808 | |
|----------|-----------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| | Maximum Thickness (T) | 0.6mm | 0.8mm | 1.3mm | 1.7mm | 2.0mm | 2.2mm | 2.0mm |
| 10V | Standard | - | 0.5pF - 3.9nF | 1.0pF - 15nF | 1.0pF - 47nF | 3.9pF - 100nF | - | 4.7pF - 100nF |
| 16V | AEC-Q200 | - | 0.5pF - 1.0nF | 1.0pF - 4.7nF | 1.0pF - 15nF | 3.9pF - 27nF | - | 4.7pF - 27nF |
| | Standard | - | 0.5pF - 2.7nF | 1.0pF - 12nF | 1.0pF - 33nF | 3.9pF - 68nF | - | 4.7pF - 68nF |
| 25V | AEC-Q200 | - | 0.5pF - 1.0nF | 1.0pF - 4.7nF | 1.0pF - 15nF | 3.9pF - 27nF | - | 4.7pF - 27nF |
| | Standard | 0.2pF - 220pF | 0.5pF - 2.2nF | 1.0pF - 10nF | 1.0pF - 27nF | 3.9pF - 56nF | - | 4.7pF - 47nF |
| 50/63V | AEC-Q200 | - | 0.5pF - 1.0nF | 1.0pF - 4.7nF | 1.0pF - 15nF | 3.9pF - 27nF | - | 4.7pF - 27nF |
| | Standard | 0.2pF - 220pF | 0.5pF - 1.5nF | 1.0pF - 5.6nF | 1.0pF - 22nF | 3.9pF - 33nF | - | 4.7pF - 33nF |
| 100V | AEC-Q200 | - | 0.5pF - 680pF | 1.0pF - 2.2nF | 1.0pF - 8.2nF | 3.9pF - 15nF | - | 4.7pF - 15nF |
| | Standard | 0.2pF - 100pF | 0.5pF - 680pF | 1.0pF - 2.2nF | 1.0pF - 8.2nF | 3.9pF - 18nF | - | 4.7pF - 18nF |
| 200/250V | AEC-Q200 | - | 0.5pF - 560pF | 1.0pF - 1.5nF | 1.0pF - 3.9nF | 3.9pF - 8.2nF | - | 4.7pF - 8.2nF |
| | Standard | 0.2pF - 33pF | 0.5pF - 560pF | 1.0pF - 1.5nF | 1.0pF - 3.9nF | 3.9pF - 8.2nF | - | 4.7pF - 8.2nF |
| 500V | AEC-Q200 | - | 10pF - 330pF | 1.0pF - 1.0nF | 1.0pF - 3.3nF | 3.9pF - 6.8nF | - | 4.7pF - 6.8nF |
| | Standard | - | 0.5pF - 330pF | 1.0pF - 1.5nF | 1.0pF - 3.3nF | 3.9pF - 6.8nF | - | 4.7pF - 6.8nF |
| 630V | AEC-Q200 | - | - | 10pF - 820pF | 1.0pF - 2.7nF | 3.9pF - 5.6nF | 6.8nF - 6.8nF | 4.7pF - 6.8nF |
| | Standard | - | - | 1.0pF - 820pF | 1.0pF - 2.7nF | 3.9pF - 5.6nF | 6.8nF - 6.8nF | 4.7pF - 6.8nF |
| 1kV | AEC-Q200 | - | - | 10pF - 330pF | 1.0pF - 2.2nF | 3.9pF - 3.9nF | - | 4.7pF - 3.9nF |
| | Standard | - | - | 1.0pF - 330pF | 1.0pF - 2.2nF | 3.9pF - 3.9nF | - | 4.7pF - 3.9nF |
| 1.2kV | AEC-Q200 | - | - | 10pF - 180pF | 1.0pF - 820pF | 3.9pF - 1.8nF | - | 4.7pF - 2.2nF |
| | Standard | - | - | 1.0pF - 180pF | 1.0pF - 820pF | 3.9pF - 1.8nF | - | 4.7pF - 2.2nF |
| 1.5kV | AEC-Q200 | - | - | 10pF - 150pF | 1.0pF - 560pF | 3.9pF - 1.2nF | - | 4.7pF - 1.5nF |
| | Standard | - | - | 1.0pF - 150pF | 1.0pF - 560pF | 3.9pF - 1.2nF | - | 4.7pF - 1.5nF |
| 2kV | AEC-Q200 | - | - | 10pF - 100pF | 1.0pF - 390pF | 3.9pF - 560pF | - | 4.7pF - 680pF |
| | Standard | - | - | 1.0pF - 100pF | 1.0pF - 390pF | 3.9pF - 560pF | - | 4.7pF - 680pF |
| 2.5kV | AEC-Q200 | - | - | - | 10pF - 150pF | 10pF - 330pF | - | 10pF - 390pF |
| | Standard | - | - | - | 1.0pF - 150pF | 3.9pF - 330pF | - | 4.7pF - 390pF |
| 3kV | AEC-Q200 | - | - | - | 10pF - 100pF | 10pF - 220pF | - | 10pF - 270pF |
| | Standard | - | - | - | 1.0pF - 100pF | 3.9pF - 220pF | - | 4.7pF - 270pF |
| 4kV* | AEC-Q200 | - | - | - | - | - | - | 10pF - 150pF |
| | Standard | - | - | - | - | - | - | 4.7pF - 150pF |
| 5kV* | AEC-Q200 | - | - | - | - | - | - | 10pF - 82pF |
| | Standard | - | - | - | - | - | - | 4.7pF - 82pF |
| 6kV* | Standard | - | - | - | - | - | - | 4.7pF - 47pF |
| 8kV* | Standard | - | - | - | - | - | - | - |
| 10kV* | Standard | - | - | - | - | - | - | - |
| 12kV* | Standard | - | - | - | - | - | - | - |

Note:
*Parts rated 4kV and above may require conformal coating post soldering.



COG/NPO (1B) — AEC-Q200 and Standard Ranges

CONTINUED

10V TO 12KV

| | COG/NPO (1B) | 1812 | | 1825 | | 2220 | |
|----------|-----------------------|--------------|---------------|--------------|---------------|--------------|---------------|
| | Maximum Thickness (T) | 2.5mm | 3.2mm | 2.5mm | 4.0mm | 2.5mm | 4.0mm |
| 10V | Standard | 10pF - 220nF | - | 10pF - 470nF | - | 10pF - 470nF | - |
| 16V | AEC-Q200 | 10pF - 47nF | - | 10pF - 82nF | - | 10pF - 100nF | - |
| | Standard | 10pF - 180nF | - | 10pF - 330nF | - | 10pF - 330nF | - |
| 25V | AEC-Q200 | 10pF - 47nF | - | 10pF - 82nF | - | 10pF - 100nF | - |
| | Standard | 10pF - 150nF | - | 10pF - 220nF | - | 10pF - 220nF | - |
| 50/63V | AEC-Q200 | 10pF - 47nF | - | 10pF - 82nF | - | 10pF - 100nF | - |
| | Standard | 10pF - 100nF | - | 10pF - 150nF | - | 10pF - 150nF | - |
| 100V | AEC-Q200 | 10pF - 39nF | - | 10pF - 47nF | - | 10pF - 56nF | - |
| | Standard | 10pF - 47nF | - | 10pF - 68nF | - | 10pF - 68nF | - |
| 200/250V | AEC-Q200 | 10pF - 18nF | 22nF - 22nF | 10pF - 27nF | 33nF - 33nF | 10pF - 33nF | 39nF - 39nF |
| | Standard | 10pF - 22nF | 27nF - 27nF | 10pF - 33nF | 39nF - 47nF | 10pF - 33nF | 39nF - 56nF |
| 500V | AEC-Q200 | 10pF - 15nF | 18nF - 22nF | 10pF - 18nF | 22nF - 33nF | 10pF - 27nF | 33nF - 39nF |
| | Standard | 10pF - 15nF | 18nF - 22nF | 10pF - 27nF | 33nF - 33nF | 10pF - 27nF | 33nF - 39nF |
| 630V | AEC-Q200 | 10pF - 15nF | 18nF - 22nF | 10pF - 10nF | 12nF - 33nF | 10pF - 27nF | 33nF - 39nF |
| | Standard | 10pF - 15nF | 18nF - 22nF | 10pF - 22nF | 27nF - 33nF | 10pF - 27nF | 33nF - 39nF |
| 1kV | AEC-Q200 | 10pF - 6.8nF | 8.2nF - 10nF | 10pF - 10nF | 12nF - 22nF | 10pF - 15nF | 18nF - 22nF |
| | Standard | 10pF - 6.8nF | 8.2nF - 10nF | 10pF - 12nF | 15nF - 22nF | 10pF - 15nF | 18nF - 22nF |
| 1.2kV | AEC-Q200 | 10pF - 3.9nF | 4.7nF - 8.2nF | 10pF - 5.6nF | 6.8nF - 18nF | 10pF - 5.6nF | 6.8nF - 22nF |
| | Standard | 10pF - 4.7nF | 5.6nF - 8.2nF | 10pF - 6.8nF | 8.2nF - 18nF | 10pF - 10nF | 12nF - 22nF |
| 1.5kV | AEC-Q200 | 10pF - 3.9nF | 4.7nF - 6.8nF | 10pF - 5.6nF | 6.8nF - 12nF | 10pF - 5.6nF | 6.8nF - 15nF |
| | Standard | 10pF - 3.9nF | 4.7nF - 6.8nF | 10pF - 5.6nF | 6.8nF - 12nF | 10pF - 5.6nF | 6.8nF - 15nF |
| 2kV | AEC-Q200 | 10pF - 2.2nF | 2.7nF - 2.7nF | 10pF - 4.7nF | 5.6nF - 5.6nF | 10pF - 4.7nF | 5.6nF - 5.6nF |
| | Standard | 10pF - 2.2nF | 2.7nF - 2.7nF | 10pF - 4.7nF | 5.6nF - 5.6nF | 10pF - 4.7nF | 5.6nF - 5.6nF |
| 2.5kV | AEC-Q200 | 10pF - 680pF | 820pF - 1.5nF | 10pF - 1.2nF | 1.5nF - 3.3nF | 10pF - 1.5nF | 1.8nF - 3.9nF |
| | Standard | 10pF - 820pF | 1.0nF - 1.5nF | 10pF - 1.5nF | 1.8nF - 3.3nF | 10pF - 1.8nF | 2.2nF - 3.9nF |
| 3kV | AEC-Q200 | 10pF - 470pF | 560pF - 1.0nF | 10pF - 820pF | 1.0nF - 2.2nF | 10pF - 1.0nF | 1.2nF - 2.7nF |
| | Standard | 10pF - 560pF | 680pF - 1.0nF | 10pF - 1.2nF | 1.5nF - 2.2nF | 10pF - 1.5nF | 1.8nF - 2.7nF |
| 4kV* | AEC-Q200 | 10pF - 220pF | 270pF - 560pF | 10pF - 680pF | 820pF - 1.5nF | 10pF - 680pF | 820pF - 1.8nF |
| | Standard | 10pF - 270pF | 330pF - 560pF | 10pF - 680pF | 820pF - 1.5nF | 10pF - 680pF | 820pF - 1.8nF |
| 5kV* | AEC-Q200 | 10pF - 180pF | 220pF - 220pF | 10pF - 330pF | 390pF - 560pF | 10pF - 330pF | 390pF - 680pF |
| | Standard | 10pF - 180pF | 220pF - 270pF | 10pF - 390pF | 470pF - 560pF | 10pF - 470pF | 560pF - 820pF |
| 6kV* | Standard | 10pF - 120pF | 150pF - 180pF | 10p - 270pF | 330pF - 330pF | 10pF - 330pF | 390p - 560pF |
| 8kV* | Standard | - | - | - | - | - | - |
| 10kV* | Standard | - | - | - | - | - | - |
| 12kV* | Standard | - | - | - | - | - | - |

Note:
*Parts rated 4kV and above may require conformal coating post soldering.



COG/NPO (1B) — AEC-Q200 and Standard Ranges

CONTINUED

10V TO 12KVDC

| | COG/NPO (1B) | 2225 | | 3640 | | 5550 | | 8060 | |
|----------|--------------|-----------------------|---------------|---------------|---------------|--------------|---------------|--------------|---------------|
| | | Maximum Thickness (T) | 2.5mm | 4.0mm | 2.5mm | 4.0mm | 2.5mm | 4.0mm | 2.5mm |
| 10V | Standard | 10pF - 560nF | - | 10pF - 330nF | - | - | - | - | - |
| 16V | AEC-Q200 | 10pF - 150nF | - | 10pF - 220nF | - | - | - | - | - |
| | Standard | 10pF - 470nF | - | 10pF - 330nF | - | - | - | - | - |
| 25V | AEC-Q200 | 10pF - 150nF | - | 10pF - 220nF | - | - | - | - | - |
| | Standard | 10pF - 330nF | - | 10pF - 330nF | - | - | - | - | - |
| 50/63V | AEC-Q200 | 10pF - 150nF | - | 10pF - 220nF | - | - | - | - | - |
| | Standard | 10pF - 220nF | - | 10pF - 330nF | - | 27pF - 680nF | - | 47pF - 1.0μF | - |
| 100V | AEC-Q200 | 10pF - 68nF | - | 10pF - 180nF | - | - | - | - | - |
| | Standard | 10pF - 82nF | - | 10pF - 270nF | - | 27pF - 470nF | - | 47pF - 680nF | - |
| 200/250V | AEC-Q200 | 10pF - 33nF | 39nF - 47nF | 10pF - 82nF | 100nF - 100nF | - | - | - | - |
| | Standard | 10pF - 47nF | 56nF - 68nF | 10pF - 120nF | 150nF - 180nF | 27pF - 270nF | 330nF - 330nF | 47pF - 390nF | 470nF - 560nF |
| 500V | AEC-Q200 | 10pF - 33nF | 39nF - 47nF | 10pF - 82nF | 100nF - 100nF | - | - | - | - |
| | Standard | 10pF - 33nF | 39nF - 47nF | 10pF - 82nF | 100nF - 120nF | 27pF - 180nF | 220nF - 270nF | 47pF - 270nF | 330nF - 470nF |
| 630V | AEC-Q200 | 10pF - 18nF | - | 10pF - 82nF | 100nF - 100nF | - | - | - | - |
| | Standard | 10pF - 22nF | 27nF - 39nF | 10pF - 82nF | 100nF - 100nF | 27pF - 120nF | 150nF - 180nF | 47pF - 220nF | 270nF - 390nF |
| 1kV | AEC-Q200 | 10pF - 18nF | 22nF - 27nF | 10pF - 47nF | 56nF - 68nF | - | - | - | - |
| | Standard | 10pF - 18nF | 22nF - 27nF | 10pF - 47nF | 56nF - 82nF | 27pF - 82nF | 100nF - 150nF | 47pF - 150nF | 180nF - 270nF |
| 1.2kV | AEC-Q200 | 10pF - 6.8nF | 8.2nF - 27nF | 10pF - 33nF | 39nF - 56nF | - | - | - | - |
| | Standard | 10pF - 12nF | 15nF - 27nF | 10pF - 33nF | 39nF - 56nF | 27pF - 68nF | 82nF - 100nF | 47pF - 100nF | 120nF - 180nF |
| 1.5kV | AEC-Q200 | 10pF - 6.8nF | 8.2nF - 18nF | 10pF - 22nF | 27nF - 39nF | - | - | - | - |
| | Standard | 10pF - 6.8nF | 8.2nF - 18nF | 10pF - 22nF | 27nF - 39nF | 27pF - 39nF | 47nF - 68nF | 47pF - 68nF | 82nF - 120nF |
| 2kV | AEC-Q200 | 10pF - 3.9nF | 4.7nF - 8.2nF | 10pF - 12nF | 15nF - 15nF | - | - | - | - |
| | Standard | 10pF - 4.7nF | 5.6nF - 8.2nF | 10pF - 12nF | 15nF - 18nF | 27pF - 22nF | 27nF - 39nF | 47pF - 39nF | 47nF - 68nF |
| 2.5kV | AEC-Q200 | 10pF - 2.7nF | 3.3nF - 4.7nF | 100pF - 5.6nF | 6.8nF - 8.2nF | - | - | - | - |
| | Standard | 10pF - 2.7nF | 3.3nF - 4.7nF | 10pF - 6.8nF | 8.2nF - 12nF | 27pF - 12nF | 15nF - 22nF | 47pF - 22nF | 27nF - 39nF |
| 3kV | AEC-Q200 | 10pF - 1.5nF | 1.8nF - 3.9nF | 100pF - 3.9nF | 4.7nF - 6.8nF | - | - | - | - |
| | Standard | 10pF - 1.8nF | 2.2nF - 3.9nF | 10pF - 4.7nF | 5.6nF - 8.2nF | 27pF - 10nF | 12nF - 18nF | 47pF - 15nF | 18nF - 27nF |
| 4kV* | AEC-Q200 | 10pF - 1.0nF | 1.2nF - 1.8nF | - | - | - | - | - | - |
| | Standard | 10pF - 1.0nF | 1.2nF - 1.8nF | 10pF - 1.8nF | 2.2nF - 3.3nF | 27pF - 4.7nF | 5.6nF - 6.8nF | 47pF - 8.2nF | 10nF - 15nF |
| 5kV* | AEC-Q200 | 10pF - 680pF | 820pF - 820pF | - | - | - | - | - | - |
| | Standard | 10pF - 680pF | 820pF - 1.2nF | 10pF - 1.5nF | 1.8nF - 2.2nF | 27pF - 2.7nF | 3.3nF - 4.7nF | 47pF - 5.6nF | 6.8nF - 10nF |
| 6kV* | Standard | 10pF - 390pF | 470pF - 680pF | 10pF - 1.0nF | 1.2nF - 1.5nF | 27pF - 1.8nF | 2.2nF - 3.3nF | 47pF - 3.9nF | 4.7nF - 6.8nF |
| 8kV* | Standard | - | - | 10pF - 150pF | - | 27pF - 330pF | - | 47pF - 680pF | - |
| 10kV* | Standard | - | - | 10pF - 100pF | - | 27pF - 180pF | - | 47pF - 470pF | - |
| 12kV* | Standard | - | - | 10pF - 68pF | - | 27pF - 120pF | - | 47pF - 220pF | - |

Note:
*Parts rated 4kV and above may require conformal coating post soldering.



X7R (2R1) — AEC-Q200 and Standard Ranges

X7R (2R1) — AEC-Q200 AND STANDARD RANGES — CAPACITANCE VALUES

16V TO 12KV

| | X7R(2R1) | 0402 | 0603 | 0805 | 1206 | | 1210 | | | 1808 | | |
|--------|-----------------------|--------------|---------------|---------------|---------------|-------------------|---------------|-------------------|-------------|-------------------|---------------|-------------------|
| | Maximum Thickness (T) | 0.6mm | 0.9mm | 1.3mm | 1.7mm | 1.7mm | 2.0mm | 2.0mm | 2.8mm | 2.8mm | 2.0mm | 2.0mm |
| | Special Requirements | - | - | - | - | Conformal Coating | - | Conformal Coating | - | Conformal Coating | - | Conformal Coating |
| 16V | AEC-Q200 | - | - | 220pF - 100nF | 220pF - 470nF | - | 1.0nF - 1.0μF | - | - | - | 1.0nF - 470nF | - |
| | Standard | - | 100pF - 100nF | 100pF - 330nF | 100pF - 1.0μF | - | 100pF - 1.5μF | - | - | - | 100pF - 1.5μF | - |
| 25V | AEC-Q200 | - | - | 220pF - 100nF | 220pF - 470nF | - | 1.0nF - 1.0μF | - | - | - | 1.0nF - 470nF | - |
| | Standard | 47pF - 10nF | 100pF - 100nF | 100pF - 220nF | 100pF - 820nF | - | 100pF - 1.2μF | - | - | - | 100pF - 1.2μF | - |
| 50/63V | AEC-Q200 | - | 100pF - 100nF | 100pF - 220nF | 100pF - 470nF | - | 100pF - 1.0μF | - | - | - | 100pF - 680nF | - |
| | Standard | 47pF - 5.6nF | 100pF - 100nF | 100pF - 220nF | 100pF - 470nF | - | 100pF - 1.0μF | - | - | - | 100pF - 680nF | - |
| 100V | AEC-Q200 | - | 100pF - 47nF | 100pF - 100nF | 100pF - 220nF | - | 100pF - 680nF | - | - | - | 100pF - 560nF | - |
| | Standard | 47pF - 3.3nF | 100pF - 47nF | 100pF - 100nF | 100pF - 330nF | - | 100pF - 680nF | - | - | - | 100pF - 560nF | - |
| 200 | AEC-Q200 | - | 100pF - 10nF | 100pF - 47nF | 100pF - 150nF | - | 100pF - 330nF | - | - | - | 100pF - 330nF | - |
| | Standard | 47pF - 1.0nF | 100pF - 10nF | 100pF - 56nF | 100pF - 150nF | - | 100pF - 330nF | - | - | - | 100pF - 330nF | - |
| 250V | AEC-Q200 | - | 100pF - 10nF | 100pF - 47nF | 100pF - 150nF | - | 100pF - 330nF | - | - | - | 100pF - 270nF | - |
| | Standard | 47pF - 1.0nF | 100pF - 10nF | 100pF - 56nF | 100pF - 150nF | - | 100pF - 330nF | - | - | - | 100pF - 270nF | - |
| 500V | AEC-Q200 | - | 220pF - 2.2nF | 100pF - 15nF | 100pF - 68nF | - | 100pF - 150nF | - | - | - | 100pF - 150nF | - |
| | Standard | - | 100pF - 2.2nF | 100pF - 15nF | 100pF - 68nF | - | 100pF - 150nF | - | - | - | 100pF - 150nF | - |
| 630V | AEC-Q200 | - | - | 220pF - 10nF | 100pF - 47nF | - | 100pF - 100nF | - | - | - | 100pF - 100nF | - |
| | Standard | - | - | 100pF - 10nF | 100pF - 47nF | - | 100pF - 100nF | - | - | - | 100pF - 100nF | - |
| 1kV | AEC-Q200 | - | - | 220pF - 4.7nF | 100pF - 22nF | - | 100pF - 47nF | - | - | - | 100pF - 47nF | - |
| | Standard | - | - | 100pF - 10nF | 100pF - 22nF | - | 100pF - 47nF | - | - | - | 100pF - 47nF | - |
| 1.2kV | AEC-Q200 | - | - | - | 100pF - 10nF | - | 100pF - 22nF | - | - | - | 100pF - 18nF | - |
| | Standard | - | - | - | 100pF - 15nF | - | 100pF - 22nF | - | - | - | 100pF - 22nF | - |
| 1.5kV | AEC-Q200 | - | - | - | 100pF - 10nF | - | 100pF - 18nF | - | 22nF - 22nF | - | 100pF - 18nF | - |
| | Standard | - | - | - | 100pF - 10nF | - | 100pF - 18nF | - | 22nF - 22nF | - | 100pF - 18nF | - |
| 2kV | AEC-Q200 | - | - | - | 100pF - 2.2nF | 2.7nF - 3.3nF | 100pF - 4.7nF | 5.6nF - 5.6nF | - | 6.8nF - 10nF | 100pF - 4.7nF | 5.6nF - 8.2nF |
| | Standard | - | - | - | 100pF - 2.2nF | 2.7nF - 3.3nF | 100pF - 4.7nF | 5.6nF - 5.6nF | - | 6.8nF - 10nF | 100pF - 4.7nF | 5.6nF - 8.2nF |
| 2.5kV | AEC-Q200 | - | - | - | - | 100pF - 2.2nF | - | 100pF - 4.7nF | - | - | 1.0nF - 1.5nF | 1.8nF - 4.7nF |
| | Standard | - | - | - | - | 220pF - 2.7nF | - | 680pF - 4.7nF | - | - | 100pF - 1.5nF | 1.8nF - 4.7nF |
| 3kV | AEC-Q200 | - | - | - | - | 100pF - 1.5nF | - | 100pF - 3.3nF | - | - | 1.0nF - 1.2nF | 1.5nF - 3.9nF |
| | Standard | - | - | - | - | 220pF - 1.5nF | - | 680pF - 3.3nF | - | - | 100pF - 1.2nF | 1.5nF - 3.9nF |
| 4kV* | AEC-Q200 | - | - | - | - | - | - | - | - | - | 1.0nF - 1.0nF | 1.2nF - 1.5nF |
| | Standard | - | - | - | - | - | - | - | - | - | 100pF - 1.0nF | 1.2nF - 2.2nF |
| 5kV* | Standard | - | - | - | - | - | - | - | - | - | 100pF - 680pF | - |
| 6kV* | Standard | - | - | - | - | - | - | - | - | - | 100pF - 390pF | - |
| 8kV* | Standard | - | - | - | - | - | - | - | - | - | - | - |
| 10kV* | Standard | - | - | - | - | - | - | - | - | - | - | - |
| 12kV* | Standard | - | - | - | - | - | - | - | - | - | - | - |

Notes:

- 1) *Parts rated 4kV and higher may require conformal coating post soldering.
- 2) "Conformal Coating" identifies parts that must be conformally coated after mounting to prevent flashover, especially between the board and the component.
- 3) Suffix codes WS2 and WS3 relate to StackiCap™ high capacitance parts. WS3 parts (shown in parentheses) must be conformally coated after mounting, especially between the board and the component.

- 4) Parts in this range may be dual use under export control legislation and as such may be subject to export license restrictions. Please refer to page 11 for more information on the dual-use regulations and contact the Knowles Capacitors Sales Office for further information on specific part numbers.



X7R (2R1) — AEC-Q200 and Standard Ranges

CONTINUED

16V TO 12KV

| | X7R(2R1) | 1812 | | | | 1825 | | | 2220 | | | |
|--------|-----------------------|---------------|-------------------|---------------|-----------------------|---------------|-------------------|---------------|---------------|-------------------|---------------|-----------------------|
| | Maximum Thickness (T) | 2.5mm | 2.5mm | 3.2mm | 3.5mm | 2.5mm | 2.5mm | 4.0mm | 2.5mm | 2.5mm | 4.0mm | 4.5mm |
| | Special Requirements | - | Conformal Coating | - | Suffix Code WS2 (WS3) | - | Conformal Coating | - | - | Conformal Coating | - | Suffix Code WS2 (WS3) |
| 16V | AEC-Q200 | 1.0nF - 680nF | - | - | - | 1.0nF - 680nF | - | - | 1.0nF - 1.5μF | - | - | - |
| | Standard | 150pF - 3.3μF | - | - | - | 220pF - 4.7μF | - | - | 220pF - 5.6μF | - | - | - |
| 25V | AEC-Q200 | 1.0nF - 680nF | - | - | - | 1.0nF - 680nF | - | - | 1.0nF - 1.5μF | - | - | - |
| | Standard | 150pF - 2.2μF | - | - | - | 220pF - 3.9μF | - | - | 220pF - 4.7μF | - | - | - |
| 50/63V | AEC-Q200 | 150pF - 2.2μF | - | - | - | 220pF - 2.2μF | - | - | 220pF - 3.3μF | - | - | - |
| | Standard | 150pF - 2.2μF | - | - | - | 220pF - 2.2μF | - | - | 220pF - 3.3μF | - | - | - |
| 100V | AEC-Q200 | 150pF - 1.0μF | - | - | - | 220pF - 1.5μF | - | - | 220pF - 1.5μF | - | - | - |
| | Standard | 150pF - 1.5μF | - | - | - | 220pF - 1.5μF | - | - | 220pF - 2.2μF | - | - | - |
| 200 | AEC-Q200 | 150pF - 560nF | - | 680nF - 680nF | 820nF - 1.0μF | 220pF - 1.2μF | - | 1.5μF - 1.5μF | 220pF - 1.2μF | - | 1.5μF - 1.5μF | - |
| | Standard | 150pF - 560nF | - | 680nF - 680nF | 820nF - 1.0μF | 220pF - 1.2μF | - | 1.5μF - 1.5μF | 220pF - 1.2μF | - | 1.5μF - 1.5μF | 1.8μF - 2.2μF |
| 250V | AEC-Q200 | 150pF - 560nF | - | 680nF - 680nF | 820nF - 1.0μF | 220pF - 1.2μF | - | 1.5μF - 1.5μF | 220pF - 1.2μF | - | 1.5μF - 1.5μF | - |
| | Standard | 150pF - 560nF | - | 680nF - 680nF | 820nF - 1.0μF | 220pF - 1.2μF | - | 1.5μF - 1.5μF | 220pF - 1.2μF | - | 1.5μF - 1.5μF | 1.8μF - 2.2μF |
| 500V | AEC-Q200 | 150pF - 390nF | - | 470nF - 470nF | 470nF - 470nF | 220pF - 560nF | - | - | 220pF - 680nF | - | - | - |
| | Standard | 150pF - 390nF | - | 470nF - 470nF | 470nF - 470nF | 220pF - 560nF | - | - | 220pF - 680nF | - | - | 820nF - 1.2μF |
| 630V | AEC-Q200 | 150pF - 220nF | - | - | 220nF - 330nF | 220pF - 470nF | - | - | 220pF - 470nF | - | - | 560nF - 1.0μF |
| | Standard | 150pF - 220nF | - | - | 270nF - 330nF | 220pF - 470nF | - | - | 220pF - 470nF | - | - | 560nF - 1.0μF |
| 1kV | AEC-Q200 | 150pF - 100nF | - | - | 120nF - 180nF | 220pF - 180nF | - | - | 220pF - 180nF | - | - | 220nF - 470nF |
| | Standard | 150pF - 100nF | - | - | 120nF - 180nF | 220pF - 180nF | - | - | 220pF - 180nF | - | - | 220nF - 470nF |
| 1.2kV | AEC-Q200 | 150pF - 39nF | - | - | (47nF - 100nF) | 220pF - 68nF | - | - | 220pF - 82nF | - | - | (100nF - 220nF) |
| | Standard | 150pF - 39nF | - | - | (47nF - 100nF) | 220pF - 68nF | - | - | 220pF - 82nF | - | - | (100nF - 220nF) |
| 1.5kV | AEC-Q200 | 150pF - 39nF | - | - | (47nF - 56nF) | 220pF - 68nF | - | - | 220pF - 82nF | - | - | (100nF - 150nF) |
| | Standard | 150pF - 39nF | - | - | (47nF - 56nF) | 220pF - 68nF | - | - | 220pF - 82nF | - | - | (100nF - 150nF) |
| 2kV | AEC-Q200 | 150pF - 10nF | 12nF - 18nF | - | - | 220pF - 10nF | 12nF - 22nF | - | 220pF - 27nF | - | - | (33nF - 100nF) |
| | Standard | 150pF - 10nF | 12nF - 18nF | - | - | 220pF - 10nF | 12nF - 22nF | - | 220pF - 33nF | - | - | (39nF - 100nF) |
| 2.5kV | AEC-Q200 | 150pF - 3.3nF | 3.9nF - 10nF | - | - | 220pF - 6.8nF | 8.2nF - 18nF | - | 220pF - 8.2nF | 10nF - 22nF | - | - |
| | Standard | 150pF - 3.3nF | 3.9nF - 10nF | - | - | 220pF - 6.8nF | 8.2nF - 18nF | - | 220pF - 8.2nF | 10nF - 22nF | - | - |
| 3kV | AEC-Q200 | 150pF - 2.7nF | 3.3nF - 4.7nF | - | - | 220pF - 3.9nF | 4.7nF - 10nF | - | 220pF - 6.8nF | 8.2nF - 15nF | - | - |
| | Standard | 150pF - 2.7nF | 3.3nF - 4.7nF | - | - | 220pF - 3.9nF | 4.7nF - 10nF | - | 220pF - 6.8nF | 8.2nF - 15nF | - | - |
| 4kV* | AEC-Q200 | 150pF - 2.2nF | - | - | - | 1.0nF - 2.2nF | - | - | 220pF - 47nF | 56nF - 68nF | - | - |
| | Standard | 150pF - 2.2nF | 2.7nF - 3.3nF | - | - | 220pF - 2.2nF | - | - | 220pF - 47nF | 56nF - 68nF | - | - |
| 5kV* | Standard | 150pF - 1.2nF | - | - | - | 220pF - 1.8nF | - | - | 220pF - 3.9nF | 47nF - 47nF | - | - |
| 6kV* | Standard | 150pF - 1.0nF | - | - | - | 220pF - 1.5nF | - | - | 220pF - 2.2nF | - | - | - |
| 8kV* | Standard | - | - | - | - | - | - | - | - | - | - | - |
| 10kV* | Standard | - | - | - | - | - | - | - | - | - | - | - |
| 12kV* | Standard | - | - | - | - | - | - | - | - | - | - | - |

- Notes:
- 1) *Parts rated 4kV and above may require conformal coating post soldering.
 - 2) "Conformal Coating" identifies parts that must be conformally coated after mounting to prevent flashover, especially between the board and the component.
 - 3) Suffix codes WS2 and WS3 relate to StackiCap™ high capacitance parts. WS3 parts (shown in parentheses) must be conformally coated after mounting, especially between the board and the component.
 - 4) Parts in this range may be dual use under export control legislation and as such may be subject to export license restrictions. Please refer to page 11 for more information on the dual-use regulations and contact the Knowles Precision Devices sales office for further information on specific part numbers.



X7R (2R1) — AEC-Q200 and Standard Ranges

CONTINUED

16V TO 12KV

| | X7R(2R1) | 2225 | | | 3640 | | 5550 | 8060 |
|-----------------------|----------|---------------|-------------------|---------------|---------------|-----------------------|---------------|---------------|
| Maximum Thickness (T) | | 2.5mm | 2.5mm | 4.0mm | 2.5mm | 4.5mm | 2.5mm | 2.5mm |
| Special Requirements | | - | Conformal Coating | - | - | Suffix Code WS2 (WS3) | - | - |
| 16V | AEC-Q200 | - | - | - | - | - | - | - |
| | Standard | 330pF - 6.8μF | - | - | - | - | - | - |
| 25V | AEC-Q200 | - | - | - | - | - | - | - |
| | Standard | 330pF - 5.6μF | - | - | - | - | - | - |
| 50/ 63V | AEC-Q200 | 330pF - 3.3μF | - | - | 470pF - 4.7μF | - | - | - |
| | Standard | 330pF - 3.3μF | - | - | 470pF - 10μF | - | 1.0nF - 15μF | 2.2nF - 22μF |
| 100V | AEC-Q200 | 330pF - 2.2μF | - | - | 470pF - 3.3μF | - | - | - |
| | Standard | 330pF - 2.7μF | - | - | 470pF - 5.6μF | - | 1.0nF - 10μF | 2.2nF - 15μF |
| 200 | AEC-Q200 | 330pF - 1.5μF | - | 1.8μF - 2.2μF | 470pF - 1.5μF | - | - | - |
| | Standard | 330pF - 1.5μF | - | 1.8μF - 2.2μF | 470pF - 3.3μF | 3.9μF - 5.6μF | 1.0nF - 5.6μF | 2.2nF - 10μF |
| 250V | AEC-Q200 | 330pF - 1.5μF | - | 1.8μF - 2.2μF | 470pF - 1.5μF | - | - | - |
| | Standard | 330pF - 1.5μF | - | 1.8μF - 2.2μF | 470pF - 3.3μF | 3.9μF - 5.6μF | 1.0nF - 5.6μF | 2.2nF - 10μF |
| 500V | AEC-Q200 | 330pF - 1.0μF | - | - | 470pF - 1.0μF | - | - | - |
| | Standard | 330pF - 1.0μF | - | - | 470pF - 1.0μF | 1.2μF - 2.7μF | 1.0nF - 1.8μF | 2.2nF - 3.3μF |
| 630V | AEC-Q200 | 330pF - 680nF | - | - | 470pF - 680nF | - | - | - |
| | Standard | 330pF - 680nF | - | - | 470pF - 680nF | 820nF - 2.2μF | 1.0nF - 1.2μF | 2.2nF - 2.2μF |
| 1kV | AEC-Q200 | 330pF - 220nF | - | - | 470nF - 180nF | 220nF - 1.0μF | - | - |
| | Standard | 330pF - 220nF | - | - | 470pF - 180nF | 220nF - 1.0μF | 1.0nF - 390nF | 2.2nF - 1.0μF |
| 1.2kV | AEC-Q200 | 330pF - 100nF | - | - | 470pF - 150nF | - | - | - |
| | Standard | 330pF - 100nF | - | - | 470pF - 150nF | (180nF - 470nF) | 1.0nF - 220nF | 2.2nF - 470nF |
| 1.5kV | AEC-Q200 | 330pF - 100nF | - | - | 470pF - 100nF | - | - | - |
| | Standard | 330pF - 100nF | - | - | 470pF - 100nF | (120nF - 330nF) | 1.0nF - 150nF | 2.2nF - 330nF |
| 2kV | AEC-Q200 | 330pF - 47nF | - | - | 470pF - 47nF | - | - | - |
| | Standard | 330pF - 47nF | - | - | 470pF - 47nF | (56nF - 150nF) | 1.0nF - 82nF | 2.2nF - 150nF |
| 2.5kV | AEC-Q200 | 330pF - 12nF | 15nF - 33nF | - | 470pF - 22nF | - | - | - |
| | Standard | 330pF - 12nF | 15nF - 33nF | - | 470pF - 33nF | - | 1.0nF - 68nF | 2.2nF - 100nF |
| 3kV | AEC-Q200 | 330pF - 8.2nF | 10nF - 18nF | - | 470pF - 18nF | - | - | - |
| | Standard | 330pF - 8.2nF | 10nF - 18nF | - | 470pF - 22nF | - | 1.0nF - 47nF | 2.2n - 82nF |
| 4kV* | AEC-Q200 | 2.2nF - 5.6nF | 6.8nF - 10nF | - | - | - | - | - |
| | Standard | 330pF - 5.6nF | 6.8nF - 10nF | - | 470pF - 6.8nF | - | 1.0nF - 15nF | 2.2nF - 33nF |
| 5kV* | Standard | 330pF - 4.7nF | - | - | 470pF - 5.6nF | - | 1.0nF - 10nF | 2.2nF - 22nF |
| 6kV* | Standard | 330pF - 2.7nF | - | - | 470pF - 4.7nF | - | 1.0nF - 8.2nF | 2.2nF - 15nF |
| 8kV* | Standard | - | - | - | 470pF - 1.5nF | - | 1.0nF - 4.7nF | 2.2nF - 6.8nF |
| 10kV* | Standard | - | - | - | 470pF - 1.0nF | - | 1.0nF - 2.2nF | 2.2nF - 4.7nF |
| 12kV* | Standard | - | - | - | 470pF - 820pF | - | 1.0nF - 1.2nF | 2.2nF - 2.2nF |

Notes:

- 1) *Parts rated 4kV and above may require conformal coating post soldering.
- 2) "Conformal Coating" identifies parts that must be conformally coated after mounting to prevent flashover, especially between the board and the component.
- 3) Suffix codes WS2 and WS3 relate to StackiCap™ high capacitance parts. WS3 parts (shown in parentheses) must be conformally coated after mounting, especially between the board and the component.

- 4) Parts in this range may be dual use under export control legislation and as such may be subject to export license restrictions. Please refer to page 11 for more information on the dual-use regulations and contact the Knowles Precision Devices sales office for further information on specific part numbers.



Ordering Information

AEC-Q200 and Standard Ranges

ORDERING INFORMATION — AEC-Q200 RANGES


| 0805 | Y | 100 | 0103 | K | S | T | --- |
|--|---|--|--|--|--|--|--|
| Chip Size | Termination | Voltage | Capacitance in PicoFarads (pF) | Capacitance Tolerance | Dielectric Release Codes | Packaging | Suffix Code |
| 0603 0805 1206 1210 1808 1812 1825 2220 2225 3640 | Y = FlexiCap™ termination base with Ni barrier (100% matte tin plating). RoHS compliant. H = FlexiCap™ termination base with Ni barrier (Tin/lead plating with min. 10% lead). Not RoHS compliant. J = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free. A = Nickel barrier (Tin/lead plating with min. 10% lead). Not RoHS compliant. Note: X7R (2R1) to AEC-Q200 is only available in Y or H termination. | 016 = 16V 025 = 25V 050 = 50V 063 = 63V 100 = 100V 200 = 200V 250 = 250V 500 = 500V 630 = 630V 1K0 = 1kV 1K2 = 1.2kV 1K5 = 1.5kV 2K0 = 2kV 2K5 = 2.5kV 3K0 = 3kV | First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following Example: 0103 = 10nF | F = ±1% G = ±2% J = ±5% K = ±10% M = ±20% Note: X7R (2R1) parts are available in J, K & M tolerances only. | A = COG/NPO (1B) to AEC-Q200 — original K = COG/NPO (1B) to AEC-Q200 — recommended E = X7R (2R1) to AEC-Q200 — original S = X7R (2R1) to AEC-Q200 — recommended | T = 178mm (7") reel R = 330mm (13") reel B = Bulk pack — tubs or trays | For StackiCap™ parts only: WS2 WS3 |

Note: Suffix code WS3 applies to StackiCap™ parts rated ≥1.2kV, and indicates conformal coating is required after mounting. For StackiCap™ parts rated <1.2kV, use suffix WS2.

ORDERING INFORMATION — STANDARD RANGES

| 1210 | Y | 200 | 0103 | K | C | T | --- |
|--|---|---|--|--|---------------------------------------|--|--|
| Chip Size | Termination | Voltage | Capacitance in PicoFarads (pF) | Capacitance Tolerance | Dielectric Release Codes | Packaging | Suffix Code |
| 0402 0603 0805 1206 1210 1808 1812 1825 2220 2225 3640 5550 8060 | Y = FlexiCap™ termination base with Ni barrier (100% matte tin plating). RoHS compliant. H = FlexiCap™ termination base with Ni barrier (Tin/lead plating with min. 10% lead). Not RoHS compliant. J = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free. A = Nickel barrier (Tin/lead plating with min. 10% lead). Not RoHS compliant. | 010 = 10V 016 = 16V 025 = 25V 050 = 50V 063 = 63V 100 = 100V 200 = 200V 250 = 250V 500 = 500V 630 = 630V 1K0 = 1kV 1K2 = 1.2kV 1K5 = 1.5kV 2K0 = 2kV 2K5 = 2.5kV 3K0 = 3kV 4K0 = 4kV 5K0 = 5kV 6K0 = 6kV 8K0 = 8kV 10K = 10kV 12K = 12kV | First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following Example: 0103 = 10nF | F = ±1% G = ±2% J = ±5% K = ±10% M = ±20% Note: X7R (2R1) parts are available in J, K & M tolerances only. | C = COG/NPO (1B) X = X7R (2R1) | T = 178mm (7") reel R = 330mm (13") reel B = Bulk pack — tubs or trays | For StackiCap™ parts only: WS2 WS3 |

Note: Suffix code WS3 applies to StackiCap™ parts rated ≥1.2kV, and indicates conformal coating is required after mounting. For StackiCap™ parts rated <1.2kV, use suffix WS2.

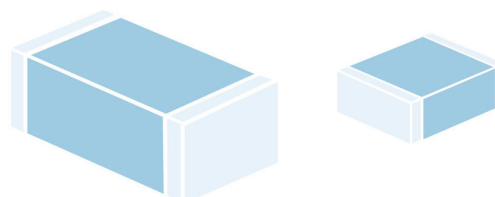

StackiCap™ Capacitors

AEC-Q200 and Standard Ranges



The StackiCap™ range offers a significant reduction in "PCB real estate" for an equivalent capacitance value when board space is at a premium. For example, a standard 150nF chip in an 8060 case size is now available in a much smaller 3640 case size.

Knowles Precision Devices' unique patented* construction and FlexiCap™ termination material make the StackiCap™ range suitable for applications including: power supplies, lighting, aerospace electronics and high voltage applications where a large amount of capacitance is required.

Further developments are ongoing, please contact the Knowles Precision Devices sales office for details of the full range.

*StackiCap™ technology is protected by international patents (pending) EP2847776, WO2013186172A1, US20150146343A1 and CN104471660A.



MAXIMUM CAPACITANCE: Up to 5.6μF

MAXIMUM VOLTAGE: Up to 2kV

INSULATION RESISTANCE: Time Constant (RxCr) (whichever is the least — 500s or 500MΩ)

CAPACITANCE VALUES — STACKICAP™ CAPACITORS

| Chip Size | 1812 | 2220 | 3640 |
|----------------|----------------|-----------------|-----------------|
| Max. Thickness | 3.5mm | 4.5mm | 4.2mm |
| 200/250V | 820nF - 1.0μF | 1.2μF - 2.2μF | 3.9μF - 5.6μF |
| 500V | 390nF - 470nF | 680nF - 1.2μF | 1.2μF - 2.7μF |
| 630V | 220nF - 330nF | 330nF - 1.0μF | 820nF - 2.2μF |
| 1kV | 120nF - 180nF | 150nF - 470nF | 220nF - 1μF |
| 1.2kV | (39nF - 100nF) | (100nF - 220nF) | (180nF - 470nF) |
| 1.5kV | (27nF - 56nF) | (56nF - 150nF) | (120nF - 330nF) |
| 2kV | - | (39nF - 100nF) | (56nF - 150nF) |

Note: Blue Background = AEC-Q200 | Values shown in parentheses require conformal coating after mounting (suffix code WS3 applies). All other values use suffix code WS2.

ORDERING INFORMATION — STACKICAP™ CAPACITORS

| 1812 | Y | 500 | 0474 | K | J | T | WS2 |
|----------------------|---|--|---|---------------------------------|--|--|----------------|
| Chip Size | Termination | Voltage | Capacitance in Picofarads (pF) | Capacitance tolerance | Dielectric | Packaging | Suffix code |
| 1812 2220 3640 | Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating). RoHS compliant. Lead free. H = FlexiCap™ Termination base with nickel barrier (Tin/lead plating with minimum 10% lead). Not RoHS compliant. | 200 = 200V 250 = 250V 500 = 500V 630 = 630V 1K0 = 1kV 1K2 = 1.2kV 1K5 = 1.5kV 2K0 = 2kV | First digit is 0. Second and third digits are significant figures of capacitance code in picofarads (pF). Fourth digit is number of zeros; e.g., 0474 = 470nF Values are E12 series. | J = ±5% K = ±10% M = ±20% | E = X7R (2R1) to AEC-Q200 X = X7R (2R1) | T = 178mm (7") reel R = 330mm (13") reel B = Bulk pack — tubs or trays | WS2 WS3 |

Note: Suffix code WS3 applies to parts with a rated voltage ≥ 1.2kV, and indicates conformal coating is required after mounting. For all other parts use suffix code WS2.

REELED QUANTITIES — STACKICAP™ CAPACITORS

| | 1812 | 2220 | 3640 |
|------------------|-------|-------|------|
| 178mm (7") Reel | 500 | 500 | - |
| 330mm (13") Reel | 2,000 | 2,000 | 500 |



Note:
Parts in this range may be defined as dual-use under export control legislation and may be subject to export license restrictions. Please refer to page 11 for more information on the dual-use regulations and contact the Knowles Precision Devices sales office for further information on specific part numbers.



Safety Certified AC Capacitors



Knowles Safety Certified capacitors comply with international UL and TÜV specifications, offering designers the option of using a surface mount ceramic multilayer capacitor to replace leaded film types.

Offering the benefits of simple pick-and-place assembly, reduced board space required and a lower profile, they are also available as a FlexiCap™ version to reduce the risk of mechanical cracking.

Our high voltage expertise allows us to offer capacitance ranges that are among the highest in the market for selected case sizes.

Applications include: modems and other telecoms equipment, AC/DC power supplies, power distribution switchgear, automotive applications, and where lightning strikes or other voltage transients represent a threat to electronic equipment.



- Surface mount multilayer ceramic capacitors
- Case sizes 1808, 1812, 2211, 2215 and 2220
- Reduced board area and height restrictions
- Meet Class Y2, X1 and X2 requirements
- Reduced assembly costs over conventional through hole components
- Approved by UL and TÜV
- FlexiCap™ polymer termination option available on all sizes

OVERVIEW OF SAFETY CAPACITOR CLASSES

| Class | Rated Voltage | Impulse Voltage | Insulation Bridging | May be used in Primary Circuit |
|-------|---------------|-----------------|-------------------------|--------------------------------|
| Y1 | 250Vac | 8000V | Double or Reinforced | Line to Protective Earth |
| Y2 | 250Vac | 5000V | Basic or Supplementary* | Line to Protective Earth |
| Y3 | 250Vac | None | Basic or Supplementary* | - |
| Y4 | 150Vac | 2500V | Basic or Supplementary* | Line to Protective Earth |
| X1 | 250Vac | 4000V | - | Line to Line |
| X2 | 250Vac | 2500V | - | Line to Line |
| X3 | 250Vac | None | - | Line to Line |

Note: * 2 x Y2 or Y4 rated may bridge double or reinforced insulation when used in series.

KNOWLES' SAFETY CERTIFIED AC CAPACITOR RANGES

Knowles offers two Safety Certified capacitor ranges:

- Enhanced 250Vac and 305Vac — our latest range, recommended for new designs
- Legacy 250Vac our original range, for existing applications

These ranges are covered on the following pages.



Enhanced 250Vac and 305Vac Safety Certified AC Capacitors



Our new range of Enhanced Safety Certified capacitors offers significant advantages over other safety certified MLCC ranges, including:

- 250Vac class Y2 ranges
 - 305Vac class X1 and X2 ranges
 - All ranges have a safety certified dc voltage rating (unique in the industry)
 - Most ranges are certified as humidity robustness grade III (unique in the industry)
-
- Approved for mains voltages up to 250Vac 50/60Hz (class Y2) and 305Vac 50/60Hz (classes X1, X2)
 - SYX range with DWV withstand to 4kVdc/3kVac – suitable for EV battery systems with high voltage test demands
 - SYS range with reduced creepage class Y2 (250Vac)/X1 (305Vac) parts, offering a smaller part for use in equipment within the scope of IEC62368
 - Certification specifications IEC/EN60384-14:2013+A1, UL60384-14 and CAN/CSA E60384-14:1
 - CTI ≥ 600

SYX/UYX FAMILY – Y2 (250VAC)/X1 (305VAC), 5KV IMPULSE

The Knowles SYX family offers guaranteed 4mm creepage class Y2/X1 safety capacitors, including humidity robustness grade III, 5kV impulse and a 1kVdc rating approved by TÜV and UL.

In addition, all components are 100% DWV tested to 4kVdc, and AQL tested to 4kVdc and 3kVac for 60s. This makes the SYX range ideal for use in high voltage battery systems within electric vehicles.

Unmarked components (UYX suffix) can be offered a 2.5kVdc rating and are designed to comply with, but are not approved to, EN60384-14.

| Dielectric | Approval Body | 1808 | 1812 | 2211 | 2215 | 2220 |
|-----------------|---------------|---------------|---------------|---------------|---------------|---------------|
| COG/NPO (1B) | TÜV, UL | 5.6pF - 220pF | 5.6pF - 820pF | 4.7pF - 1nF | 820pF - 1nF | - |
| X7R (2R1) | TÜV, UL | 82pF - 1.8nF | 100pF - 4.7nF | 100pF - 3.9nF | 2.7nF - 6.8nF | 150pF - 6.8nF |
| Max. Thickness* | | 2.0mm | 2.8mm | 2.8mm | 2.8mm | 2.54mm |

Notes: Blue Background = AEC-Q200.

* For lower capacitance values in this family, the maximum part thickness will be lower than the value shown. To find out the maximum thickness for a specific part, please use the Part Builder or Part Search application on the Knowles website to generate the component datasheet.



Enhanced 250Vac and 305Vac Safety Certified AC Capacitors



CONTINUED

SYS/UYS FAMILY – Y2 (250VAC)/X1 (305VAC), 5KV IMPULSE

The Knowles SYS family offers class Y2/X1 safety capacitors, including humidity robustness grade III, 5kV impulse and a 1kVdc rating, approved by TÜV and UL for use in machinery within the scope of IEC 62368. Unmarked components (UYS suffix) can be offered with a 2500Vdc rating and are designed to comply with, but are not approved to, EN60384-14.

SYS and UYS components have a creepage <4mm, and as a result, their safety certifications are only valid for applications within the scope of IEC 62368. Ref: EN60384-14, clause 4.8.1.3.

S3X/U3X FAMILY – X2 (305VAC) 2.5KV IMPULSE

The Knowles S3X family offers class 305Vac X2 safety capacitors, 2.5kV impulse and a 1kVdc rating, approved by TÜV and UL.

Unmarked components (U3X suffix) can be offered with a 1.5kVdc rating and are designed to comply with, but are not approved to, EN60384-14.

S2X/U2X FAMILY – X2 (250VAC), 2.5KV IMPULSE

The Knowles S2X family offers class 250Vac X2 safety capacitors, including humidity robustness grade III, 2.5kV impulse and a 1kVdc rating, approved by TÜV and UL.

Unmarked components (U2X suffix) can be offered with a 2.5kVdc rating and are designed to comply with, but are not approved to, EN60384-14.

| Dielectric | Approval Body | 1808 | 1812 |
|-----------------|---------------|---------------|---------------|
| COG/NP0 (1B) | TÜV, UL | 5.6pF - 220pF | 5.6pF - 680pF |
| X7R (2R1) | TÜV, UL | 82pF - 1.8nF | 100pF - 3.9nF |
| Max. Thickness* | | 2.0mm | 2.8mm |

Notes: Blue Background = AEC-Q200.

* For lower capacitance values in this family, the maximum part thickness will be lower than the value shown. To find out the maximum thickness for a specific part, please use the Part Builder or Part Search application on the Knowles website to generate the component datasheet.

| Dielectric | Approval Body | 2220 |
|-----------------|---------------|-------------|
| COG/NP0 (1B) | TÜV, UL | - |
| X7R (2R1) | TÜV, UL | 10nF - 56nF |
| Max. Thickness* | | 4.5mm |

Notes: Blue Background = AEC-Q200.

* For lower capacitance values in this family, the maximum part thickness will be lower than the value shown. To find out the maximum thickness for a specific part, please use the Part Builder or Part Search application on the Knowles website to generate the component datasheet.

| Dielectric | Approval Body | 1808 |
|-----------------|---------------|------------|
| COG/NP0 (1B) | TÜV, UL | 10pF - 1nF |
| X7R (2R1) | TÜV, UL | - |
| Max. Thickness* | | 2.0mm |

Notes: Blue Background = AEC-Q200.

* For lower capacitance values in this family, the maximum part thickness will be lower than the value shown. To find out the maximum thickness for a specific part, please use the Part Builder or Part Search application on the Knowles website to generate the component datasheet.



Enhanced 250Vac and 305Vac Safety Certified AC Capacitors



CONTINUED

CLASSIFICATION AND APPROVAL SPECIFICATION

| Chip Size | Suffix Code | Dielectric | Cap Range | Classification | Approval Specification | Approval Body | AEC-Q200 |
|-----------|-------------|--------------|----------------|---|--|---------------|------------------------|
| 1808 | SYX | COG/NP0 (1B) | 5.6pF to 220pF | Y2 (250Vac) + X1 (305Vac) UL/cUL FOWX2 + FOWX8 | IEC/EN60384-14:2013+A1:2016 UL/CAN/CSA60384-14:2014 | TÜV UL | TÜV & UL FULL RANGE |
| | | X7R (2R1) | 82pF to 1.8nF | | | | |
| 1808 | SYS | COG/NP0 (1B) | 5.6pF to 220pF | Y2 (250Vac) + X1 (305Vac) for use in equipment within the spec of IEC62368 UL/cUL FOWX2 + FOWX8 | IEC/EN60384-14:2013+A1:2016 UL/CAN/CSA60384-14:2014 | TÜV UL | TÜV & UL FULL RANGE |
| | | X7R (2R1) | 82pF to 1.8nF | | | | |
| 1808 | S2X | COG/NP0 (1B) | 10pF to 1.0nF | X2 (250Vac) UL/cUL FOWX2 + FOWX8 | IEC/EN60384-14:2013+A1:2016 UL/CAN/CSA60384-14:2014 | TÜV UL | TÜV & UL FULL RANGE |
| 1812 | SYX | COG/NP0 (1B) | 5.6pF to 820pF | Y2 (250Vac) + X1 (305Vac) UL/cUL FOWX2 + FOWX8 | IEC/EN60384-14:2013+A1:2016 UL/CAN/CSA60384-14:2014 | TÜV UL | TÜV & UL FULL RANGE |
| | | X7R (2R1) | 100pF to 4.7nF | | | | |
| 1812 | SYS | COG/NP0 (1B) | 5.6pF to 680pF | Y2 (250Vac) + X1 (305Vac) for use in equipment within the spec of IEC62368 UL/cUL FOWX2 + FOWX8 | IEC/EN60384-14:2013+A1:2016 UL/CAN/CSA60384-14:2014 | TÜV UL | TÜV & UL FULL RANGE |
| | | X7R (2R1) | 100pF to 3.9nF | | | | |
| 2211 | SYX | COG/NP0 (1B) | 4.7pF to 1nF | Y2 (250Vac) + X1 (305Vac) UL/cUL FOWX2 + FOWX8 | IEC/EN60384-14:2013+A1:2016 UL/CAN/CSA60384-14:2014 | TÜV UL | TÜV & UL FULL RANGE |
| | | X7R (2R1) | 100pF to 3.9nF | | | | |
| 2215 | SYX | COG/NP0 (1B) | 820pF to 1nF | Y2 (250Vac) + X1 (305Vac) UL/cUL FOWX2 + FOWX8 | IEC/EN60384-14:2013+A1:2016 UL/CAN/CSA60384-14:2014 | TÜV UL | TÜV & UL FULL RANGE |
| | | X7R (2R1) | 2.7nF to 6.8nF | | | | |
| 2220 | SYX | X7R (2R1) | 150pF to 6.8nF | Y2 (250Vac) + X1 (305Vac) UL/cUL FOWX2 + FOWX8 | IEC/EN60384-14:2013+A1:2016 UL/CAN/CSA60384-14:2014 | TÜV UL | TÜV & UL FULL RANGE |
| 2220 | S3X | X7R (2R1) | 10nF to 56nF | X2 (305Vac) UL/cUL FOWX2 + FOWX8 | IEC/EN60384-14:2013+A1:2016 UL/CAN/CSA60384-14:2014 | TÜV UL | TÜV & UL FULL RANGE |




Enhanced 250Vac and 305Vac Safety Certified AC Capacitors



DIMENSIONS

| Chip Size | Suffix Code | Length L1 mm (in) | Width (W) mm (in) | Maximum Thickness T* mm (in) | Termination Bands L2, L3 mm (in) | Creepage L4 mm (in) |
|-----------|-------------|--------------------------------|--------------------------------|---|----------------------------------|---------------------|
| 1808 | SYX/UYX | 4.95 ± 0.35 (0.195 ± 0.014) | 2.00 ± 0.30 (0.08 ± 0.012) | 1.50 (0.06) 2.00 (0.08) | 0.35 – 0.80 (0.014 – 0.030) | ≥4 (≥0.0158) |
| | SYS/UYX | 4.80 ± 0.35 (0.189 ± 0.014) | 2.00 ± 0.30 (0.08 ± 0.012) | 1.50 (0.06) 2.00 (0.08) | 0.35 – 0.80 (0.014 – 0.030) | ≥3.5 (≥0.0138) |
| | S2X/U2X | 4.50 ± 0.35 (0.180 ± 0.014) | 2.00 ± 0.30 (0.08 ± 0.012) | 1.50 (0.06) 2.00 (0.08) | 0.50 – 0.80 (0.020 – 0.030) | ≥3 (≥0.118) |
| 1812 | SYX/UYX | 4.95 ± 0.35 (0.195 ± 0.014) | 3.20 ± 0.30 (0.126 ± 0.012) | 1.50 (0.06) 2.00 (0.08) 2.54 (0.10) 2.80 (0.11) | 0.35 – 0.80 (0.014 – 0.030) | ≥4 (≥0.0158) |
| | SYS/UYX | 4.80 ± 0.35 (0.189 ± 0.014) | 3.20 ± 0.30 (0.126 ± 0.012) | 1.50 (0.06) 2.00 (0.08) 2.54 (0.10) 2.80 (0.11) | 0.35 – 0.80 (0.014 – 0.030) | ≥3.5 (≥0.0138) |
| 2211 | SYX/UYX | 5.70 ± 0.40 (0.225 ± 0.016) | 2.79 ± 0.30 (0.11 ± 0.012) | 1.50 (0.06) 2.00 (0.08) 2.54 (0.10) 2.80 (0.11) | 0.50 – 0.80 (0.020 – 0.030) | ≥4 (≥0.0158) |
| 2215 | SYX/UYX | 5.70 ± 0.40 (0.225 ± 0.016) | 3.81 ± 0.35 (0.35 ± 0.02) | 2.00 (0.08) 2.54 (0.10) 2.80 (0.11) | 0.50 – 0.80 (0.020 – 0.030) | ≥4 (≥0.0158) |
| 2220 | SYX/UYX | 5.70 ± 0.40 (0.225 ± 0.016) | 5.00 ± 0.40 (0.197 ± 0.016) | 2.00 (0.08) 2.54 (0.10) | 0.25 – 1.00 (0.010 – 0.040) | ≥4 (≥0.0158) |
| | S3X/U3X | 5.70 ± 0.40 (0.225 ± 0.016) | 5.00 ± 0.40 (0.197 ± 0.016) | 2.54 (0.1) 2.80 (0.11) 3.25 (0.128) 4.50 (0.177) | 0.25 – 1.00 (0.010 – 0.040) | ≥4 (≥0.0158) |



*Maximum part thickness will be one of the stated values, depending on capacitance requested. To find out the maximum thickness for a specific part, please use the Part Builder or Part Search application on the Knowles website to generate the component datasheet.

ORDERING INFORMATION – SYX/UYX FAMILY

| 1808 | J | A25 | 0102 | K | J | T | SYX |
|--------------------------------------|--|--------------|---|---|--|--|---|
| Chip Size | Termination | Voltage | Capacitance in Picofarads (pF) | Capacitance Tolerance | Dielectric Codes | Packaging | Suffix Code |
| 1808 1812 2211 2215 2220 | J = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free.* Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating). RoHS compliant. | A25 = 250Vac | First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following. Example: 0102 = 1nF | <10pF B = ±0.10pF C = ±0.25pF D = ±0.50pF ≥ 10pF F = ±1% G = ±2% J = ±5% K = ±10% M = ±20% Note: X7R (2R1) parts are available in J, K & M tolerances only. | K = COG/NPO (1B) to AEC-Q200 S = X7R (2R1) to AEC-Q200 G = COG/NPO (1B) J = X7R (2R1) | T = 178mm (7") reel R = 330mm (13") reel B = Bulk pack – tubs or trays | SYX = Y2 (250Vac)/ X1 (305Vac) Marked + Approved UYX = Unmarked parts in accordance with above but not certified |

Notes: Blue Background = AEC-Q200. *J termination is available for dielectric codes K, G and J only.

ORDERING INFORMATION – SYS/UYX FAMILY

| 1808 | J | A25 | 0102 | G | J | T | SYS |
|--------------|--|--------------|---|---|--|--|---|
| Chip Size | Termination | Voltage | Capacitance in Picofarads (pF) | Capacitance Tolerance | Dielectric Codes | Packaging | Suffix Code |
| 1808 1812 | J = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free.* Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating). RoHS compliant. | A25 = 250Vac | First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following. Example: 0102 = 1nF | <10pF B = ±0.10pF C = ±0.25pF D = ±0.50pF ≥ 10pF F = ±1% G = ±2% J = ±5% K = ±10% M = ±20% Note: X7R (2R1) parts are available in J, K & M tolerances only. | K = COG/NPO (1B) to AEC-Q200 S = X7R (2R1) to AEC-Q200 G = COG/NPO (1B) J = X7R (2R1) | T = 178mm (7") reel R = 330mm (13") reel B = Bulk pack – tubs or trays | SYS = Y2 (250Vac)/ X1 (305Vac) Marked + Approved UYX = Unmarked parts in accordance with above but not certified |

Notes: Blue Background = AEC-Q200. *J termination is available for dielectric codes K, G and J only.



Enhanced 250Vac and 305Vac Safety Certified AC Capacitors



CONTINUED

ORDERING INFORMATION – S3X/U3X FAMILY

| 2220 | Y | A30 | 0563 | K | S | T | S3X |
|-----------|--|--------------|--|---------------------------------|--|--|--|
| Chip Size | Termination | Voltage | Capacitance in Picofarads (pF) | Capacitance Tolerance | Dielectric Codes | Packaging | Suffix Code |
| 2220 | J = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free.* Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating). RoHS compliant. | A30 = 305Vac | First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following. Example: 0563 = 56nF | J = ±5% K = ±10% M = ±20% | S = X7R (2R1) to AEC-Q200 J = X7R (2R1) | T = 178mm (7") reel R = 330mm (13") reel B = Bulk pack — tubs or trays | S3X = X2 (305Vac) Marked + Approved U3X = Unmarked parts in accordance with above but not certified |

Notes: Blue Background = AEC-Q200. *J termination is available for dielectric codes K, G and J only.

ORDERING INFORMATION – S2X/U2X FAMILY

| 1808 | J | A25 | 0102 | G | J | T | S2X |
|-----------|---|--------------|---|---|--|--|--|
| Chip Size | Termination | Voltage | Capacitance in Picofarads (pF) | Capacitance Tolerance | Dielectric Codes | Packaging | Suffix Code |
| 1808 | J = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free. Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating). RoHS compliant. | A25 = 250Vac | First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following. Example: 0102 = 1nF | <10pF B = ±0.10pF C = ±0.25pF D = ±0.50pF ≥ 10pF F = ±1% G = ±2% J = ±5% K = ±10% M = ±20% | K = COG/NP0 (1B) to AEC-Q200 G = COG/NP0 (1B) | T = 178mm (7") reel R = 330mm (13") reel B = Bulk pack — tubs or trays | S2X = X2 (250Vac) Marked + Approved U2X = Unmarked parts in accordance with above but not certified |

Notes: Blue Background = AEC-Q200.

Legacy 250Vac Safety Certified AC Capacitors



Knowles' original 250Vac safety certified capacitors remain available in our Legacy range to support existing customer applications.

For new equipment designs, we recommend our Enhanced 250Vac and 305Vac Safety Certified AC Capacitors range (see page 27).



- Approved for mains voltages up to 250Vac
- Smaller sizes suitable for use in equipment certified to EN60950
- Certification specifications for larger sizes include: IEC/EN60384-14, UL/CSA60950 and UL60384-14

250VAC SAFETY CERTIFIED CAPACITORS

| Dielectric | Approval Body | X1 PY2 | X2 SP | Y2/X1 SP | Y2/X1 B16/M16 [†] | X2 B17 | | |
|----------------|---------------|---------------|---------------|---------------|----------------------------|---------------|--------------|-------------------------------------|
| | | 1808 | 1812 | 1808 | 2211 | 2215 | 2220 | 2220 |
| COG/NP0 (1B) | TÜV, UL | 4.7pF - 390pF | 4.7pF - 390pF | 4.7pF - 1.5nF | 4.7pF - 1nF | 820pF - 1nF | - | - |
| X7R (2R1) | TÜV, UL | 150pF - 1nF | 150pF - 2.2nF | 150pF - 4.7nF | 100pF - 3.9nF | 2.7nF - 3.9nF | 150pF - 10nF | 150pF - 22nF (TÜV approval only) |
| Max. Thickness | | 2.0mm | 2.5mm | 2.0mm | 2.54mm | 2.54mm | 2.54mm* | 2.54mm** |

Notes: Blue Background = AEC-Q200.

* Y2/X1 (B16 and M16) 2220 parts with values >5.6nF have a maximum thickness of 4.5mm.

** X2 (B17) 2220 parts with values >10nF have a maximum thickness of 4.0mm.

[†]M16 parts have an open mode construction to reduce the risk of short-circuit failure in the event of a mechanical crack developing. For further information on the design of open mode parts, refer to page 35 of this catalog.



Legacy 250Vac Safety Certified AC Capacitors



CLASSIFICATION AND APPROVAL SPECIFICATION

| Chip Size | Suffix Code | Dielectric | Cap Range | Classification | Approval Specification | Approval Body | AEC-Q200 |
|-----------|--------------------------------------|--------------|----------------|-----------------------|--|---------------|---|
| 1808 | SP ¹ | COG/NP0 (1B) | 4.7pF to 1.5nF | X2 NWGG2, NWGQ8 | IEC60384-14 EN60384-14 UL-60950-1, 2nd Ed CSA 60950-1-07 2nd Ed | TÜV UL | TÜV & UL FULL RANGE |
| 1808 | SP ¹ | X7R (2R1) | 150pF to 4.7nF | X2 NWGG2, NWGQ8 | IEC60384-14 EN60384-14 UL-60950-1, 2nd Ed CSA 60950-1-07 2nd Ed | TÜV UL | TÜV & UL FULL RANGE "Y" TERM ONLY |
| 1808 | PY2 ¹ | COG/NP0 (1B) | 4.7pF to 390pF | X1 NWGG2, NWGQ8 | IEC60384-14 EN60384-14 UL-60950-1, 2nd Ed CSA 60950-1-07 2nd Ed | TÜV UL | TÜV & UL FULL RANGE |
| 1808 | PY2 ¹ | X7R (2R1) | 150pF to 1nF | X1 NWGG2, NWGQ8 | IEC60384-14 EN60384-14 UL-60950-1, 2nd Ed CSA 60950-1-07 2nd Ed | TÜV UL | TÜV & UL 1nF max. "Y" TERM ONLY |
| 1812 | PY2 ¹ | COG/NP0 (1B) | 4.7pF to 390pF | X1 NWGG2, NWGQ8 | IEC60384-14 EN60384-14 UL-60950-1, 2nd Ed CSA 60950-1-07 2nd Ed | TÜV UL | TÜV & UL FULL RANGE |
| 1812 | PY2 ¹ | X7R (2R1) | 150pF to 2.2nF | X1 NWGG2, NWGQ8 | IEC60384-14 EN60384-14 UL-60950-1, 2nd Ed CSA 60950-1-07 2nd Ed | TÜV UL | TÜV & UL 2.2nF max. "Y" TERM ONLY |
| 2211 | SP ² | COG/NP0 (1B) | 4.7pF to 1nF | Y2/X1 NWGG2, NWGQ8 | IEC60384-14 EN60384-14 UL-60950-1, 2nd Ed CSA 60950-1-07 2nd Ed | TÜV UL | TÜV & UL FULL RANGE |
| 2211 | SP ² | X7R (2R1) | 100pF to 3.9nF | Y2/X1 NWGG2, NWGQ8 | IEC60384-14 EN60384-14 UL-60950-1, 2nd Ed CSA 60950-1-07 2nd Ed | TÜV UL | TÜV & UL FULL RANGE "Y" & "H" TERM ONLY |
| 2215 | SP ² | COG/NP0 (1B) | 820pF to 1nF | Y2/X1 NWGG2, NWGQ8 | IEC60384-14 EN60384-14 UL-60950-1, 2nd Ed CSA 60950-1-07 2nd Ed | TÜV UL | TÜV & UL FULL RANGE |
| 2215 | SP ² | X7R (2R1) | 2.7nF to 3.9nF | Y2/X1 NWGG2, NWGQ8 | IEC60384-14 EN60384-14 UL-60950-1, 2nd Ed CSA 60950-1-07 2nd Ed | TÜV UL | TÜV & UL FULL RANGE "Y" & "H" TERM ONLY |
| 2220 | B16 ³ or M16 ³ | X7R (2R1) | 150pF to 10nF | Y2/X1 FOWX2, FOWX8 | IEC60384-14 EN60384-14 UL-60384-14:2010 CSA E60384-14:09 | TÜV UL | TÜV & UL FULL RANGE "Y" & "H" TERM ONLY |
| 2220 | B17 ² | X7R (2R1) | 150pF to 22nF | X2 | IEC60384-14 EN60384-14 | TÜV | TÜV ONLY 22nF max. "Y" & "H" TERM ONLY |

Notes: Termination availability

(1) J and Y terminations only.

(2) J, Y, A and H terminations available.

(3) J, Y, A and H terminations available on values ≤5.6nF. Y and H terminations on values >5.6nF.

PY2 Unmarked capacitors also available as released in accordance with approval specifications. Suffix Code SY2 applies.

SP Unmarked capacitors also available as released in accordance with approval specifications. Suffix Code SPU applies.

B16 Unmarked capacitors with a dual AC/DC rating are also available as released in accordance with approval specifications. Suffix Code U16 applies.

B17 Unmarked capacitors with a dual AC/DC rating are also available as released in accordance with approval specifications. Suffix Code U17 applies.




Legacy 250Vac Safety Certified AC Capacitors



DIMENSIONS

| Chip Size | Length L1 mm (in) | Width (W) mm (in) | Maximum Thickness T mm (in) | Termination Bands L2, L3 mm (in) | Creepage L4 mm (in) |
|-----------|-------------------------------|-----------------------------|-----------------------------|----------------------------------|---------------------|
| 1808 | 4.50 ± 0.35 (0.180 ± 0.014) | 2.00 ± 0.30 (0.08 ± 0.012) | 2.0 (0.08) | 0.50 – 0.80 (0.020 - 0.030) | ≥3.0 (≥0.118) |
| 1812 | 4.50 ± 0.30 (0.180 ± 0.012) | 3.20 ± 0.20 (0.126 ± 0.012) | 2.5 (0.1) | 0.50 – 0.80 (0.020 - 0.030) | ≥3.0 (≥0.118) |
| 2211 | 5.70 ± 0.40 (0.225 ± 0.016) | 2.79 ± 0.30 (0.11 ± 0.012) | 2.54 (0.1) | 0.50 – 0.80 (0.020 - 0.030) | ≥4.0 (≥0.158) |
| 2215 | 5.70 ± 0.40 (0.225 ± 0.016) | 3.81 ± 0.35 (0.35 ± 0.02) | 2.54 (0.1) | 0.50 – 0.80 (0.020 - 0.030) | ≥4 (≥0.158) |
| 2220 | 5.70 ± 0.40* (0.225 ± 0.016)* | 5.00 ± 0.40 (0.197 ± 0.016) | 2.54** (0.1)** | 0.25 – 1.00 (0.010 - 0.040) | ≥4 (≥0.158) |




*For 2220 B16 parts >5.6nF, length L1 = 5.8 ± 0.40 (0.228 ± 0.016).

**For 2220 B16 parts >5.6nF, max thickness (T) = 4.50 (0.177). For 2220 B17 parts >10nF, max thickness (T) = 4.0 (0.157).

ORDERING INFORMATION — SPU/SP RANGES

| 1808 | J | A25 | 0102 | J | C | T | SP |
|-----------|---|--------------|--|---|--|--|--|
| Chip Size | Termination | Voltage | Capacitance in Picofarads (pF) | Capacitance Tolerance | Dielectric Codes | Packaging | Suffix Code |
| 1808 | J = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free. Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating). RoHS compliant. | A25 = 250Vac | First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following. Example: 0102 = 1nF | <10pF B = ±0.10pF C = ±0.25pF D = ±0.50pF ≥ 10pF F = ±1% G = ±2% J = ±5% K = ±10% M = ±20% Note: X7R (2R1) parts are available in J, K & M tolerances only. | A = COG/NP0 (1B) to AEC-Q200 E = X7R (2R1) to AEC-Q200 C = COG/NP0 (1B) X = X7R (2R1) | T = 178mm (7") reel R = 330mm (13") reel B = Bulk pack — tubs or trays | SP = Surge protection capacitors (marked + approved) SPU = Surge protection capacitors (un-marked parts are in accordance with but not certified) |
| 2211 | A = Nickel barrier (Tin/lead plating with min. 10% lead). Not RoHS compliant. | | | | | | |
| 2215 | H = FlexiCap™ termination base with nickel barrier (Tin/lead plating with minimum 10% lead). Not RoHS compliant. | | | | | | |


Note: J and A terminations are not available for dielectric code E. A and H terminations are available for case sizes 2211/2215 only.



ORDERING INFORMATION — PY2/SY2 RANGES

| 1808 | J | A25 | 0102 | J | X | T | PY2 |
|-----------|--|--------------|--|---|--|--|---|
| Chip Size | Termination | Voltage | Capacitance in Picofarads (pF) | Capacitance Tolerance | Dielectric Codes | Packaging | Suffix Code |
| 1808 | J = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free. | A25 = 250Vac | First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following. Example: 0102 = 1nF | <10pF B = ±0.10pF C = ±0.25pF D = ±0.50pF > 10pF F = ±1% G = ±2% J = ±5% K = ±10% M = ±20% Note: X7R (2R1) parts are available in J, K & M tolerances only. | A = COG/NP0 (1B) to AEC-Q200 E = X7R (2R1) to AEC-Q200 C = COG/NP0 (1B) X = X7R (2R1) | T = 178mm (7") reel R = 330mm (13") reel B = Bulk pack — tubs or trays | PY2 = Safety tested Surge protection capacitors (marked + approved) SY2 = Surge protection capacitors (un-marked parts are in accordance with but not certified) |
| 1812 | Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating). RoHS compliant. | | | | | | |

Note: J termination is not available for dielectric code E.



ORDERING INFORMATION — B16/B17/M16 RANGES

| 2220 | J | A25 | 0102 | J | X | T | B16 |
|-----------|--|--------------|--|---------------------------------|--|--|---|
| Chip Size | Termination | Voltage | Capacitance in Picofarads (pF) | Capacitance Tolerance | Dielectric Codes | Packaging | Suffix Code |
| 2220 | J = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free. Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating). RoHS compliant. A = Nickel barrier (Tin/lead plating with min. 10% lead). Not RoHS compliant. H = FlexiCap™ termination base with nickel barrier (Tin/lead plating with minimum 10% lead). Not RoHS compliant. | A25 = 250Vac | First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following. Example: 0102 = 1nF | J = ±5% K = ±10% M = ±20% | E = X7R (2R1) to AEC-Q200 - original S = X7R (2R1) to AEC-Q200 - recommended X = X7R(2R1) - original J = X7R(2R1) - recommended | T = 178mm (7") reel 1000 pieces R = 330mm (13") reel 4000 pieces B = Bulk pack — tubs or trays | B16 = Type A: X1/Y2 B17 = Type B: X2 U16 = Surge protection Unmarked Type A X1/Y2 capacitors (with a dual AC/DC rating are in accordance with but not certified) U17 = Surge protection Unmarked Type B X2 capacitors (with a dual AC/DC rating are in accordance with but not certified) M16 = Type A: X1/Y2, open mode protected design |

Notes: J and A terminations are not available for dielectric codes E and S (all capacitance values), or for dielectric code X with suffix codes B16/U16 for capacitance values >5.6nF.

H termination is available for dielectric codes E and X only. Dielectric codes S and J are available for use with suffix codes B16, U16 and M16 only.



Open Mode Capacitors

COG/NPO (1B) and X7R (2R1)




Open Mode capacitors have been designed specifically for use in applications where mechanical cracking is a severe problem and short circuits due to cracking are unacceptable.

Open Mode capacitors use inset electrode margins, which prevent any mechanical cracks that may form during board assembly from connecting to the internal electrodes.

When combined with FlexiCap™ termination, Open Mode capacitors provide a robust component with the assurance that if a part becomes cracked, the crack will be unlikely to result in short circuit failure.

Qualification included cracking the components by severe bend tests. Following the bend tests, cracked components were subjected to endurance/humidity tests, with no failures evident due to short circuits. Note: Depending on the severity of the crack, capacitance loss was between 0% and 70%.
Note: Blue Background = AEC-Q200.

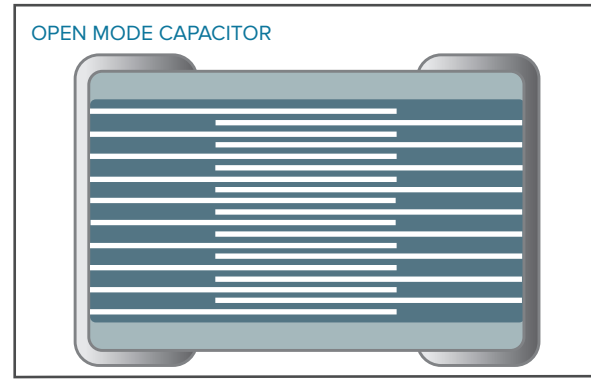

OPEN MODE — COG/NPO (1B) — CAPACITANCE VALUES

| COG/NPO (1B) | 0603 | 0805 | 1206 | 1210 | 1808 | 1812 | 2220 | 2225 |
|----------------|-------|--------|-------|-------|-------|-------|-------|-------|
| Max. Thickness | 0.8mm | 1.37mm | 1.7mm | 2.0mm | 2.0mm | 2.5mm | 2.5mm | 2.5mm |
| Min cap | 10pF | 10pF | 10pF | 22pF | 22pF | 47pF | 68pF | 100pF |
| 16/25V | 82pF | 82pF | 82pF | 82pF | 82pF | 120pF | 180pF | 270pF |
| 50/63V | 82pF | 82pF | 82pF | 82pF | 82pF | 120pF | 180pF | 270pF |
| 100V | 82pF | 82pF | 82pF | 82pF | 82pF | 120pF | 180pF | 270pF |
| 200/250V | 82pF | 82pF | 82pF | 82pF | 82pF | 120pF | 180pF | 270pF |
| 500V | — | 82pF | 82pF | 82pF | 82pF | 120pF | 180pF | 270pF |
| 630V | — | 47pF | 82pF | 82pF | 82pF | 120pF | 180pF | 270pF |
| 1kV | — | 47pF | 82pF | 82pF | 82pF | 120pF | 180pF | 270pF |

OPEN MODE — X7R (2R1) — CAPACITANCE VALUES

| X7R (2R1) | 0603 | 0805 | 1206 | 1210 | 1808 | 1812 | 2220 | 2225 |
|----------------|-------|-------------|-------------|-------------|-------|-------|-------|-------------|
| Max. Thickness | 0.8mm | 1.37mm | 1.7mm | 2.0mm | 2.0mm | 2.5mm | 2.5mm | 2.5mm |
| Min cap | 100pF | 100pF | 100pF | 100pF | 100pF | 150pF | 220pF | 330pF |
| 16V | 39nF | 100nF 150nF | 220nF 470nF | 470nF 680nF | 680nF | 1.5µF | 3.3µF | 4.7µF |
| 25V | 33nF | 100nF 120nF | 220nF 330nF | 470nF 560nF | 560nF | 1.2µF | 2.2µF | 3.9µF |
| 50/63V | 22nF | 100nF | 220nF | 470nF | 470nF | 1µF | 1.5µF | 2.7µF |
| 100V | 6.8nF | 27nF | 100nF | 220nF | 220nF | 680nF | 1µF | 1.5µF 1.8µF |
| 200/250V | 2.7nF | 22nF | 68nF | 100nF | 100nF | 330nF | 680nF | 1µF |
| 500V | — | 5.6nF | 39nF | 68nF | 68nF | 180nF | 330nF | 390nF |
| 630V | — | — | 22nF | 33nF | 27nF | 100nF | 180nF | 220nF |
| 1kV | — | — | 6.8nF | 15nF | 15nF | 47nF | 100nF | 100nF |

ORDERING INFORMATION — OPEN MODE CAPACITORS

| 1206 | Y | 050 | 0224 | K | X | T | --- | |
|--|--|--|--|---|--|--|---------------------------|-------------|
| Chip Size | Termination | Voltage | Capacitance in Picofarads (pF) | Capacitance Tolerance | Dielectric | Release Codes | Packaging | Suffix Code |
| 0603 0805 1206 1210 1808 1812 2220 2225 | Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating), RoHS compliant. | 016 = 16V 025 = 25V 050 = 50V 063 = 63V 100 = 100V 200 = 200V 250 = 250V 500 = 500V 630 = 630V 1K0 = 1kV | First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following. Example: 0224 = 220000pF | F = ±1% G = ±2% J = ±5% K = ±10% M = ±20% Note: X7R (2R1) parts are available in J, K & M tolerances only. | A = COG/NPO (1B) to AEC-Q200 E = X7R (2R1) to AEC-Q200 - original S = X7R (2R1) to AEC-Q200 - recommended C = COG/NPO (1B) X = X7R (2R1) - original J = X7R (2R1) - recommended | T = 178mm (7") reel R = 330mm (13") reel B = Bulk pack — tubs or trays | M01 = Open Mode capacitor | |

Tandem Capacitors — X7R (2R1)




Tandem capacitors have been designed as a fail safe range, using a series section internal design, for use in any application where short circuits would be unacceptable.

When combined with FlexiCap™ termination, Tandem capacitors provide an ultra robust and reliable component, for use in the most demanding applications.

Non-standard voltages are available. For more information, please consult the Knowles Capacitors Sales Office.

Qualification included cracking the components by severe bend tests. Following the bend tests, cracked components were subjected to endurance/humidity tests, with no failures evident due to short circuits. Note: Depending on the severity of the crack, capacitance loss was between 0% and 50%.

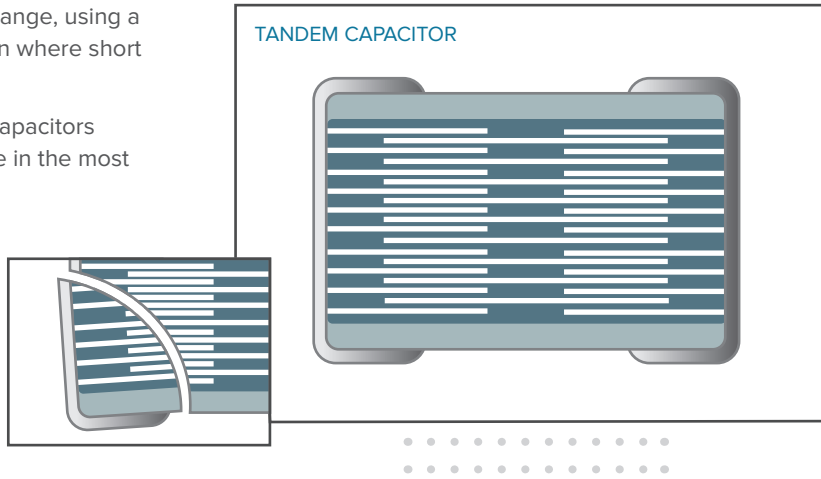


TANDEM — X7R (2R1) — CAPACITANCE VALUES

| X7R (2R1) | 0603 | 0805 | 1206 | 1210 | 1812 | 2220 | 2225 |
|----------------|-------|--------|-------|-------|-------|-------|-------|
| Max. Thickness | 0.8mm | 1.39mm | 1.7mm | 2.0mm | 2.0mm | 2.5mm | 2.5mm |
| Min cap | 100pF | 100pF | 100pF | 100pF | 150pF | 220pF | 330pF |
| 16V | 12nF | 47nF | 150nF | 270nF | 560nF | 1.2µF | 1.5µF |
| 25V | 10nF | 39nF | 120nF | 220nF | 470nF | 1µF | 1.2µF |
| 50/63V | 6.8nF | 33nF | 100nF | 180nF | 390nF | 680nF | 1µF |
| 100V | 2.2nF | 10nF | 47nF | 82nF | 220nF | 470nF | 680nF |
| 200/250V | 1nF | 4.7nF | 22nF | 47nF | 100nF | 220nF | 330nF |

Note: Blue Background= AEC-Q200.

ORDERING INFORMATION — TANDEM CAPACITORS

| 1206 | Y | 050 | 0224 | K | X | T | --- |
|--|--|--|--|---------------------------------|---|--|------------------------|
| Chip Size | Termination | Voltage | Capacitance in Picofarads (pF) | Capacitance Tolerance | Dielectric Codes | Packaging | Suffix Code |
| 0603 0805 1206 1210 1812 2220 2225 | Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating). RoHS compliant. | 050 = 50V 063 = 63V 100 = 100V 200 = 200V 250 = 250V | First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following. Example: 0224 = 220000pF | J = ±5% K = ±10% M = ±20% | E = X7R (2R1) to AEC-Q200 — original X = X7R (2R1) | T = 178mm (7") reel R = 330mm (13") reel B = Bulk pack — tubs or trays | T01 = Tandem capacitor |

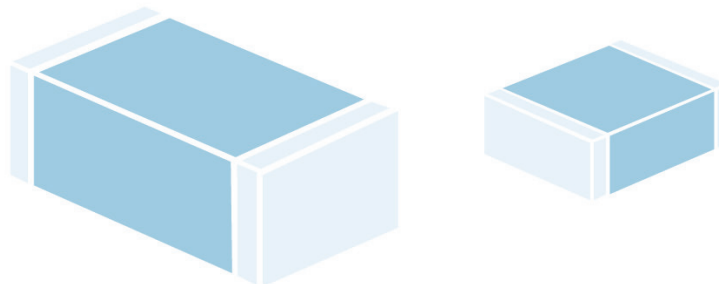

X8R High Temperature Capacitors — up to 150°C



The X8R dielectric will operate from -55°C to +150°C, with a maximum capacitance change ±15% (without applied voltage).

The devices are available in sizes 0805 to 2225, with voltage ranges from 25V to 3kV and capacitance values from 100pF to 2.2µF.

The capacitors have been developed by Knowles Precision Devices to meet demand from various applications in the automotive and industrial markets and in other electronic equipment exposed to high temperatures. The increased use of electronics in automotive “under the hood” applications has created demand for this product range.

The X8R range incorporates a specially formulated termination with a nickel barrier finish that has been designed to enhance the mechanical performance of these SMD chip capacitors in harsh environments typically present in automotive applications.

X8R HIGH TEMPERATURE CAPACITORS — CAPACITANCE VALUES

| X8R | 0805 | 1206 | 1210 | 1808 | 1812 | 2220 | 2225 |
|----------------|--------|-------|-------|-------|-------|-------|-------|
| Max. Thickness | 1.37mm | 1.7mm | 2.0mm | 2.0mm | 2.5mm | 2.5mm | 2.5mm |
| Min cap | 100pF | 100pF | 100pF | 100pF | 150pF | 220pF | 330pF |
| Min cap | 220pF | 220pF | 220pF | 220pF | 220pF | 220pF | 330pF |
| 50V | 47nF | 150nF | 330nF | 330nF | 680nF | 1.2µF | 2.2µF |
| 100V | 33nF | 100nF | 220nF | 220nF | 470nF | 1µF | 1.5µF |
| 200/250V | 15nF | 68nF | 150nF | 150nF | 330nF | 680nF | 1µF |
| 500V | 4.7nF | 22nF | 47nF | 47nF | 120nF | 330nF | 470nF |
| 630V | 2.2nF | 10nF | 33nF | 33nF | 68nF | 180nF | 220nF |
| 1kV | 1.5nF | 3.3nF | 6.8nF | 6.8nF | 27nF | 68nF | 82nF |
| 1.2kV | - | 2.2nF | 5.6nF | 5.6nF | 15nF | 47nF | 56nF |
| 1.5kV | - | 1.5nF | 3.3nF | 3.3nF | 10nF | 27nF | 33nF |
| 2kV | - | 680pF | 1.5nF | 1.5nF | 5.6nF | 15nF | 22nF |
| 2.5kV | - | - | - | 1.2nF | 3.3nF | 10nF | 12nF |
| 3kV | - | - | - | 820pF | 2.7nF | 5.6nF | 6.8nF |

CAPACITANCE RANGE:

100pF to 2.2µF (0805 to 2225)

TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):

±15% from -55°C to +150°C

CAPACITANCE RANGE:

< 0.025

TERMINATION:

Nickel Barrier Tin Plated

INSULATION RESISTANCE (IR):

100G Ω or 1000secs (whichever is the less).

DIELECTRIC WITHSTAND VOLTAGE (DWV)

2.5 x rated voltage for 5±1 seconds, 50mA charging current maximum.

AGING RATE:

1% per decade (typical)

Note: Blue background = AEC-Q200.

ORDERING INFORMATION — X8R HIGH TEMPERATURE CAPACITORS

| 1206 | Y | 100 | 0473 | K | N | T |
|--|--|--|---|---------------------------------|---------------------------------|--|
| Chip Size | Termination | Voltage | Capacitance in Picofarads (pF) | Capacitance Tolerance | Dielectric Release Codes | Packaging |
| 0805 1206 1210 1808 1812 2220 2225 | Y = FlexiCap™ termination base with nickel barrier (100% matte tin plating). | 050 = 50V 100 = 100V 200 = 200V 250 = 250V 500 = 500V 630 = 630V 1K0 = 1kV 1K5 = 1.5kV 2K0 = 2kV 2K5 = 2.5kV 3K0 = 3kV | First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following. Example: 0473 = 47000pF = 47nF | J = ±5% K = ±10% M = ±20% | N = X8R T = X8R AEC-Q200 | T = 178mm (7") reel R = 330mm (13") reel B = Bulk pack — tubs or trays |



Ultra-Low ESR HiQ MLCCs — X8G Range



The Ultra-Low ESR HiQ X8G range offers a very stable, High Q material system that provides excellent low loss performance. Optimized for lowest possible ESR, the electrode system provides low metal losses resulting in flatter performance curves and reduced losses at higher frequencies.

An extended operating temperature range of -55°C to +150°C accommodates modern high density microelectronics requirements. This range of high frequency capacitors is suitable for many applications where economical, high performance is required.



ULTRA-LOW ESR HIQ CAPACITORS — X8G RANGE — CAPACITANCE VALUES

| Chip size | 0402 | 0505 | 0603 | 0805 | 1111 |
|-----------------|---------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|-------------------------------------|
| Thickness | 0.6mm max | 1.27mm max | 0.8mm max | 1.0mm max | 2.0 ± 0.2mm |
| Min cap | 0.2pF | 0.3pF | 0.2pF | 0.2pF | 0.5pF |
| Min cap | 0.2pF | 0.3pF | 0.2pF | 0.2pF | - |
| 50V | 100pF | 1.0nF | 470pF | 1.5nF | 5.1nF |
| 100V | 100pF | 560pF | 150pF | 1.0nF | 5.1nF |
| 200V | - | - | - | - | 5.1nF |
| 250V | 33pF | 270pF | 150pF | 820pF | 5.1nF |
| 500V | 33pF | 240pF | 150pF | 430pF | 1.8nF |
| 630V | - | - | - | - | 1.8nF |
| 1kV | - | - | - | 47pF | 1.8nF |
| 1.5kV | - | - | - | - | 820pF |
| 2kV | - | - | - | - | 390pF |
| Tape quantities | 7" reel - 10,000 13" reel - 15,000 | 7" reel - 2,500 13" reel - 10,000 | 7" reel - 4,000 13" reel - 16,000 | 7" reel - 3,000 13" reel - 12,000 | 7" reel - 1,000 13" reel - 5,000 |

OPERATING TEMPERATURE:

-55°C to +150°C (EIA X8G)

TEMPERATURE COEFFICIENT (TYPICAL):

0 ± 30 ppm/°C (EIA X8G)

INSULATION RESISTANCE: Time

constant (Ri xCr) (whichever is the least)
100GΩ or 1000s

Q FACTOR: >2000 @ 1MHz

Note: Blue background = AEC-Q200.

Capacitance values below 1pF are in 0.1pF steps. Capacitance values higher than 1pF follow E24 series.

ORDERING INFORMATION — ULTRA-LOW ESR HIQ CAPACITORS — X8G RANGE

| 085 | J | 250 | 0101 | J | H | T |
|--------------------------------------|--|--|---|--|---|--|
| Chip Size | Termination | Voltage | Capacitance in Picofarads (pF) | Capacitance Tolerance | Dielectric | Packaging |
| 0402 0505 0603 0805 1111 | J = Nickel barrier (100% matte tin plating). RoHS compliant. Lead free. | 050 = 50V 100 = 100V 200 = 200V 250 = 250V 500 = 500V 630 = 630V 1K0 = 1kV 1K5 = 1.5kV 2K0 = 2.0kV | <1.0pF: Insert a P for the decimal point as the first character. e.g. P300 = 0.3pF Values in 0.1pF steps ≥1.0pF & <10pF: Insert a P for the decimal point as the second character. e.g. 8P20 = 8.2pF Values are E24 series ≥10pF: First digit is 0. Second and third digits are significant figures of capacitance code. Fourth digit is number of zeros. e.g. 0101 = 100pF Values are E24 series | <4.7pF H = ±0.05pF B = ±0.1pF C = ±0.25pF D = ±0.5pF <10pF B = ±0.1pF C = ±0.25pF D = ±0.5pF ≥10pF F = ±1% G = ±2% J = ±5% K = ±10% | V = Ultra-Low ESR High Frequency X8G to AEC-Q200 H = Ultra-Low ESR High Frequency X8G | T = 178mm (7") horizontal reel R = 330mm (13") reel B = Bulk pack — tubs or trays V = 178mm (7") vertical reel* |

* Vertical reel is available for case size 1111 only



Ultra-Low ESR HiQ MLCCs — X8G Range





TYPICAL PERFORMANCE — 0603 CHIP SIZE

TYPICAL PERFORMANCE — 0805 CHIP SIZE



0603 H SERIES IMPEDANCE vs. FREQUENCY

0805 H SERIES IMPEDANCE vs. FREQUENCY

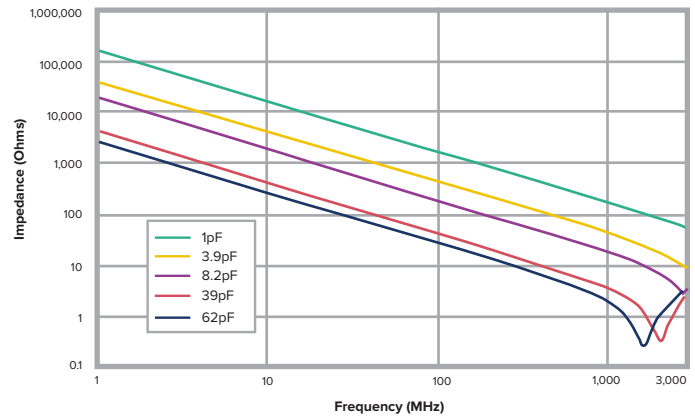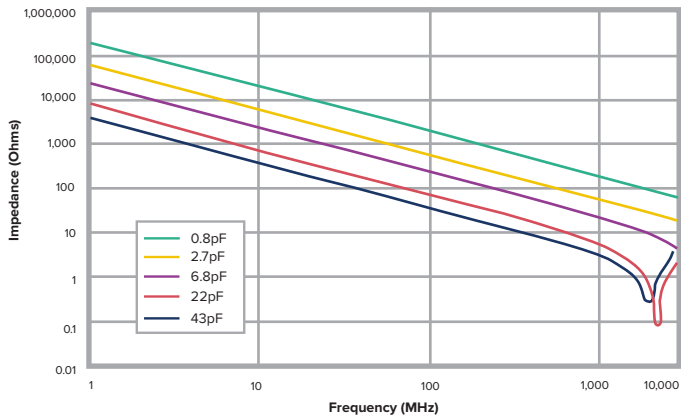



0603 H SERIES ESR vs. FREQUENCY

0805 H SERIES ESR vs. FREQUENCY

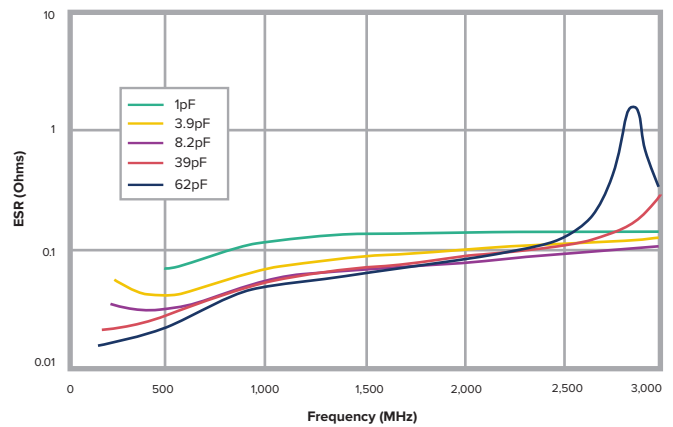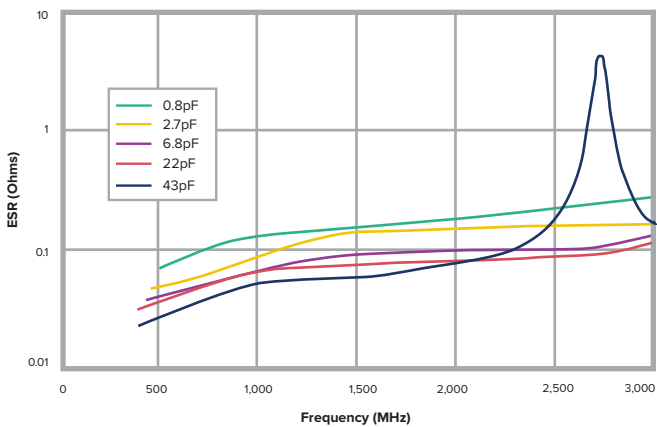

0603 H SERIES Q vs. FREQUENCY

0805 H SERIES Q vs. FREQUENCY

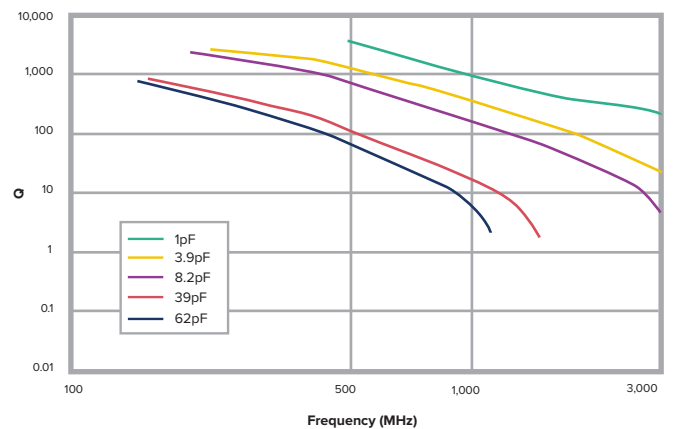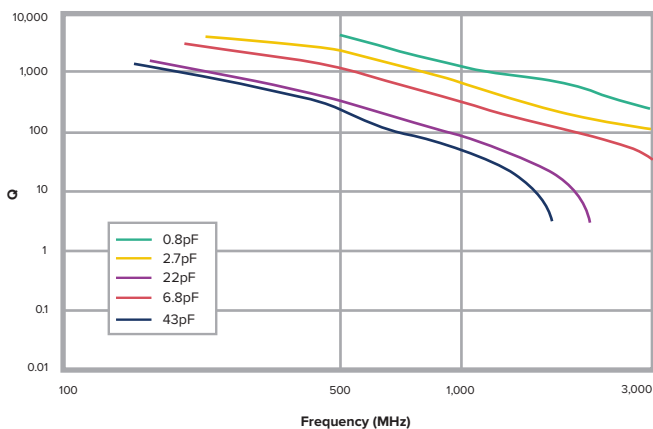


Surface Mount EMI Filters — E01 and E07 Ranges



The E01 and E07 ranges of feedthrough MLCC chip "C" filters are 3-terminal chip devices designed to offer reduced inductance compared to conventional MLCCs when used in signal line filtering. The filtered signal passes through the chip internal electrodes and the noise is filtered to the grounded side contacts, resulting in reduced length noise transmission paths.

Available in COG/NP0 (1B) and X7R (2R1) dielectrics, with current ratings of 300mA, 1A, 2A, 3A and voltage ratings of 25Vdc to 200Vdc. Also available with FlexiCap™ termination, which is strongly recommended for new designs.

Commonly used in automotive applications, a range qualified to AEC-Q200 is also available.

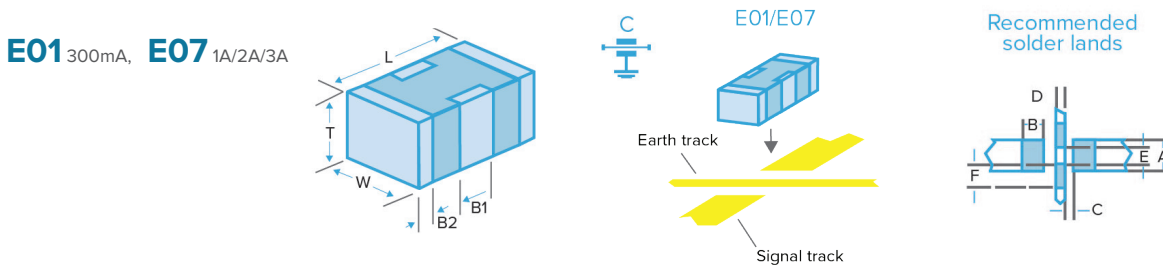

DIMENSIONS

| | 0805 | 1206 | 1806 | 1812 |
|-----------|-------------------------------|-------------------------------|-------------------------------|--------------------------------|
| L | 2.0 ± 0.3 (0.079 ± 0.012) | 3.2 ± 0.3 (0.126 ± 0.012) | 4.5 ± 0.35 (0.177 ± 0.014) | 4.5 ± 0.35 (0.177 ± 0.014) |
| W | 1.25 ± 0.2 (0.049 ± 0.008) | 1.6 ± 0.2 (0.063 ± 0.008) | 1.6 ± 0.2 (0.063 ± 0.008) | 3.2 ± 0.3 (0.126 ± 0.012) |
| T | 1.0 ± 0.15 (0.039 ± 0.006) | 1.1 ± 0.2 (0.043 ± 0.008) | 1.1 ± 0.2 (0.043 ± 0.008) | 2.0 ± 0.3 (0.079 ± 0.012) |
| B1 | 0.60 ± 0.2 (0.024 ± 0.008) | 0.95 ± 0.3 (0.037 ± 0.012) | 1.4 ± 0.3 (0.055 ± 0.012) | 1.45 ± 0.35 (0.055 ± 0.014) |
| B2 | 0.3 ± 0.15 (0.012 ± 0.006) | 0.5 ± 0.25 (0.02 ± 0.01) | 0.5 ± 0.25 (0.02 ± 0.01) | 0.75 ± 0.25 (0.03 ± 0.01) |

| | 0805 | 1206 | 1806 | 1812 |
|----------|--------------|--------------|--------------|--------------|
| A | 0.95 (0.037) | 1.20 (0.047) | 1.2 (0.047) | 2.65 (0.104) |
| B | 0.90 (0.035) | 0.90 (0.035) | 1.40 (0.055) | 1.40 (0.055) |
| C | 0.30 (0.012) | 0.60 (0.024) | 0.80 (0.031) | 0.80 (0.031) |
| D | 0.40 (0.016) | 0.80 (0.031) | 1.40 (0.055) | 1.40 (0.055) |
| E | 0.75 (0.030) | 1.0 (0.039) | 1.0 (0.039) | 2.05 (0.080) |
| F | 0.56 (0.022) | 0.70 (0.028) | 0.70 (0.028) | 1.08 (0.043) |

Notes: 1) All dimensions mm (inches). 2) Pad widths less than chip width gives improved mechanical performance. 3) The solder stencil should place 4 discrete solder pads. The unprinted distance between ground pads is shown as dim E. 4) Insulating the earth track underneath the filters is acceptable and can help avoid displacement of filter during soldering but can result in residue entrapment under the chip.

STANDARD RANGE (E01, E07) — CAPACITANCE VALUES

| TYPE | | E01 | | | E07 | | | |
|---------------|--------------|--|---------------|---------------|---------------|---------------|---------------|---------------|
| Chip Size | | 0805 | 1206 | 1806 | 0805 | 1206 | 1806 | 1812 |
| Max Current | | 300mA | 300mA | 300mA | 1A | 2A | 2A | 3A |
| Rated Voltage | Dielectric | Minimum and maximum capacitance values | | | | | | |
| 25Vdc | COG/NP0 (1B) | 180pF - 1.5nF | 560pF - 3.9nF | 820pF - 4.7nF | 180pF - 1.5nF | 560pF - 3.9nF | 820pF - 4.7nF | - |
| | X7R (2R1) | 470pF - 100nF | 5.6nF - 330nF | 3.9nF - 560nF | 820pF - 100nF | 10nF - 330nF | 22nF - 560nF | 560nF - 1.8µF |
| 50Vdc | COG/NP0 (1B) | 22pF - 820pF | 22pF - 3.3nF | 22pF - 3.9nF | 10pF - 220pF | 22pF - 1nF | 100pF - 1.5nF | - |
| | X7R (2R1) | 560pF - 68nF | 4.7nF - 220nF | 3.3nF - 330nF | 1nF - 68nF | 10nF - 220nF | 22nF - 330nF | 330nF - 1.5µF |
| 100Vdc | COG/NP0 (1B) | 22pF - 560pF | 22pF - 2.2nF | 22pF - 3.3nF | 10pF - 120pF | 22pF - 560pF | 100pF - 680pF | - |
| | X7R (2R1) | 560pF - 27nF | 1.8nF - 100nF | 3.3nF - 180nF | 1nF - 27nF | 10nF - 100nF | 22nF - 180nF | 180nF - 820nF |
| 200Vdc | COG/NP0 (1B) | - | 560pF - 1.2nF | 56pF - 1nF | - | 15pF - 180pF | 56pF - 470pF | - |
| | X7R (2R1) | - | 2.7nF - 56nF | 3.9nF - 100nF | - | 12nF - 56nF | 22nF - 100nF | 100nF - 270nF |

Note: E07 25Vdc COG/NP0 (1B) 1206 and 1806 ranges in green, have a maximum current of 1A.



Surface Mount EMI Filters — E01 and E07 Ranges



AEC-Q200 RANGE (E01, E07) — CAPACITANCE VALUES


| TYPE | | E01 | | | E07 | | |
|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|
| Chip Size | | 0805 | 1206 | 1806 | 0805 | 1206 | 1806 |
| 50V | C0G/NPO (1B) | 22pF - 820pF | 22pF - 1nF | 22pF - 2.2nF | 10pF - 220pF | 22pF - 1nF | 100pF - 1.5nF |
| | X7R (2R1) | 560pF - 47nF | 4.7nF - 100nF | 3.3nF - 200nF | 1nF - 47nF | 10nF - 100nF | 22nF - 200nF |
| 100V | C0G/NPO (1B) | 22pF - 560pF | 22pF - 1nF | 22pF - 2.2nF | 10pF - 120pF | 22pF - 560pF | 100pF - 680pF |
| | X7R (2R1) | 560pF - 15nF | 1.8nF - 15nF | 3.3nF - 68nF | 1nF - 15nF | 10nF - 15nF | 22nF - 68nF |

Notes: Blue background = AEC-Q200. For some lower capacitance parts, higher voltage rated parts may be supplied.

OPEN BOARD INSERTION LOSS PERFORMANCE IN 50Ω SYSTEM

OPEN BOARD PERFORMANCE

| Cap. | 0.1MHz | 1MHz | 10MHz | 100MHz | 1GHz | Resonance Freq (MHz) approx. |
|-------|--------|------|-------|--------|------|------------------------------|
| 10pF | 0 | 0 | 0 | 0 | 7.5 | 2200 |
| 22pF | 0 | 0 | 0 | 0 | 16 | 1600 |
| 33pF | 0 | 0 | 0 | 1 | 22 | 1350 |
| 47pF | 0 | 0 | 0 | 2 | 28 | 1150 |
| 68pF | 0 | 0 | 0 | 3 | 41 | 900 |
| 100pF | 0 | 0 | 0 | 5 | 28 | 800 |
| 150pF | 0 | 0 | 0 | 8 | 24 | 700 |
| 220pF | 0 | 0 | 0 | 12 | 20 | 600 |
| 330pF | 0 | 0 | 1 | 15 | 20 | 500 |
| 470pF | 0 | 0 | 2 | 18 | 20 | 425 |
| 560pF | 0 | 0 | 3 | 20 | 20 | 350 |
| 680pF | 0 | 0 | 4 | 22 | 20 | 300 |
| 820pF | 0 | 0 | 5 | 24 | 20 | 260 |
| 1nF | 0 | 0 | 7 | 27 | 20 | 220 |
| 1.5nF | 0 | 0 | 9 | 31 | 20 | 200 |
| 2.2nF | 0 | 0 | 12 | 34 | 20 | 170 |
| 3.3nF | 0 | 1 | 14 | 39 | 20 | 135 |
| 4.7nF | 0 | 2 | 18 | 46 | 20 | 110 |
| 6.8nF | 0 | 3 | 21 | 50 | 20 | 90 |
| 10nF | 0 | 5 | 24 | 48 | 20 | 80 |
| 15nF | 0 | 8 | 27 | 45 | 20 | 65 |
| 22nF | 0 | 12 | 31 | 43 | 20 | 56 |
| 33nF | 1 | 14 | 34 | 40 | 20 | 40 |
| 47nF | 2 | 17 | 38 | 40 | 20 | 34 |
| 68nF | 4 | 20 | 41 | 40 | 20 | 30 |
| 100nF | 5 | 24 | 45 | 40 | 20 | 28 |
| 150nF | 8 | 26 | 48 | 40 | 20 | 24 |
| 220nF | 10 | 30 | 52 | 40 | 20 | 17 |
| 330nF | 13 | 33 | 55 | 40 | 20 | 15.5 |
| 470nF | 16 | 36 | 60 | 40 | 20 | 14 |
| 560nF | 18 | 39 | 65 | 40 | 20 | 12 |

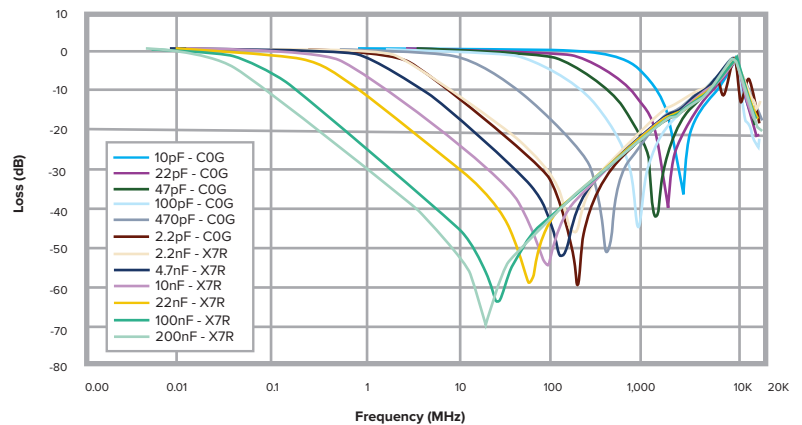

ORDERING INFORMATION — E01 AND E07 FEEDTHROUGH CAPACITORS

| Chip Size | Termination | Voltage | Capacitance in Picofarads (pF) | Tolerance | Dielectric | Packaging | Type |
|---------------------------|--|--|---|-----------|--|---|------------|
| 1206 Y 100 0103 M X T E07 | J = Nickel Barrier (Tin) Y = FlexiCap™ (Tin - X7R (2R1) only) A = (Tin/Lead) Not RoHS compliant. H = FlexiCap™ (Tin/Lead) Not RoHS compliant. | 025 = 25V 050 = 50V 100 = 100V 200 = 200V | First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following. Example: 0103 = 10000pF. | M = ±20% | A = C0G/NPO (1B) to AEC-Q200 E = X7R (2R1) to AEC-Q200 C = C0G/NPO (1B) X = X7R (2R1) | T = 178mm (7") reel R = 330mm (13") reel B = Bulk | E01 E07 |

Notes: A, Y and H terminations are not available for dielectric codes A and C.

J and A terminations are not available for dielectric code E.

Please contact your Knowles Precision Devices sales office for any special requirements.

REELED QUANTITIES

| | 0805 | 1206 | 1806 | 1812 |
|------------------|--------|--------|--------|-------|
| 178mm (7") reel | 3,000 | 2,500 | 2,500 | 1,000 |
| 330mm (13") reel | 12,000 | 10,000 | 10,000 | 4,000 |

Surface Mount EMI Filters — E03 X2Y IPCs



The X2Y Integrated Passive Component is a 3-terminal EMI chip device.

When used in balanced line applications, the revolutionary design provides simultaneous line-to-line and line-to-ground filtering, using a single ceramic chip. In this way, differential and common mode filtering are provided in one device.

For unbalanced applications, it provides ultra-low ESL (equivalent series inductance). Capable of replacing two or more conventional devices, it is ideal for balanced and unbalanced lines, twisted pairs and dc motors, in automotive, audio, sensor and other applications.

Available in sizes from 0805 to 1812, these filters can prove invaluable in meeting stringent EMC demands.

Dielectric:
X7R (2R1) or COG/NPO (1B)

Capacitance measurement:
At 1,000-hr point

Temperature rating:
-55°C to +125°C

Dielectric withstand voltage:
≤200V 2.5 times rated Volts for 5 secs. 500V 1.5 times rated Volts for 5 secs. Charging current limited to 50mA Max.

Electrical configuration:
Multiple capacitance

Typical capacitance matching:
Better than 5% (down to 1% available on request)

Insulation resistance:
100GΩ or 1000s (whichever is the least)

STANDARD RANGE (E03) — CAPACITANCE VALUES

| TYPE | | E03 | | | |
|---------------|--------------|---------------|---------------|---------------|---------------|
| Chip Size | | 0805 | 1206 | 1410 | 1812 |
| Rated Voltage | Dielectric | | | | |
| 25Vdc | COG/NPO (1B) | 560pF - 820pF | 1.8nF - 3.3nF | 6.8nF - 8.2nF | 12nF - 15nF |
| | X7R (2R1) | 56nF - 68nF | - | 470nF - 470nF | 820nF - 820nF |
| 50Vdc | COG/NPO (1B) | 390pF - 470pF | 1.2nF - 1.5nF | 4.7nF - 5.6nF | 8.2nF - 10nF |
| | X7R (2R1) | 18nF - 47nF | 56nF - 220nF | 180nF - 400nF | 390nF - 680nF |
| 100Vdc | COG/NPO (1B) | 10pF - 330pF | 22pF - 1nF | 100pF - 3.9nF | 820pF - 6.8nF |
| | X7R (2R1) | 470pF - 15nF | 1.5nF - 47nF | 4.7nF - 150nF | 8.2nF - 330nF |
| 200Vdc | COG/NPO (1B) | - | 22pF - 1nF | 100pF - 3.3nF | 820pF - 5.6nF |
| | X7R (2R1) | - | 820pF - 33nF | 1.2nF - 120nF | 2.7nF - 180nF |
| 500Vdc | COG/NPO (1B) | - | - | - | 820pF - 3.9nF |
| | X7R (2R1) | - | - | - | 2.7nF - 100nF |

Note: For some lower capacitance parts, higher voltage rated parts may be supplied.




Surface Mount EMI Filters — E03 X2Y IPCs



AEC-Q200 RANGE (E03) — CAPACITANCE VALUES


| Chip Size | | 0805 | 1206 | 1410 | 1812 |
|-----------|--------------|---------------|---------------|---------------|---------------|
| 50Vdc | COG/NP0 (1B) | 390pF - 470pF | 1.2nF - 1.5nF | 4.7nF - 5.6nF | 8.2nF - 10nF |
| | X7R (2R1) | 18nF - 33nF | 56nF - 150nF | 180nF - 330nF | 390nF - 560nF |
| 100Vdc | COG/NP0 (1B) | 10pF - 330pF | 22pF - 1nF | 100pF - 3.9nF | 820pF - 6.8nF |
| | X7R (2R1) | 470pF - 15nF | 1.5nF - 47nF | 4.7nF - 150nF | 8.2nF - 330nF |

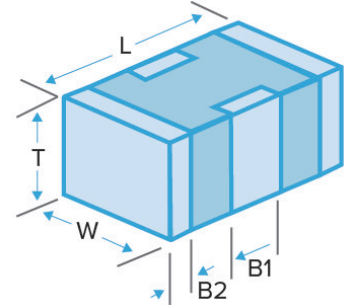

Note: Blue background = AEC-Q200.

| | 0805 | 1206 | 1410 | 1812 |
|----|-----------------------------|----------------------------|------------------------|-----------------------------|
| L | 2.0 ± 0.3 (0.079 ± 0.012) | 3.2 ± 0.3 (0.126 ± 0.012) | 3.6±0.3 (0.14±0.012) | 4.5 ± 0.35 (0.177 ± 0.014) |
| W | 1.25 ± 0.2 (0.049 ± 0.008) | 1.6 ± 0.2 (0.063 ± 0.008) | 2.5±0.3 (0.1±0.012) | 3.2 ± 0.3 (0.126 ± 0.012) |
| T | 1.0 ± 0.15 (0.039 ± 0.006) | 1.1 ± 0.2 (0.043 ± 0.008) | 2.0 max. (0.08 max.) | 2.1 max (0.083 max) |
| B1 | 0.50 ± 0.25 (0.020 ± 0.010) | 0.95 ± 0.3 (0.037 ± 0.012) | 1.20±0.3 (0.047±0.012) | 1.45 ± 0.35 (0.055 ± 0.014) |
| B2 | 0.3 ± 0.15 (0.012 ± 0.006) | 0.5 ± 0.25 (0.02 ± 0.01) | 0.5±0.25 (0.02±0.01) | 0.75 ± 0.25 (0.03 ± 0.01) |

Recommended solder lands



| | 0805 | 1206 | 1410 | 1812 |
|---|--------------|-------------|--------------|--------------|
| A | 0.95 (0.037) | 1.2 (0.047) | 2.05 (0.08) | 2.65 (0.104) |
| B | 0.9 (0.035) | 0.9 (0.035) | 1.0 (0.040) | 1.4 (0.055) |
| C | 0.3 (0.012) | 0.6 (0.024) | 0.7 (0.028) | 0.8 (0.031) |
| D | 0.4 (0.016) | 0.8 (0.031) | 0.9 (0.035) | 1.4 (0.055) |
| E | 0.75 (0.030) | 1.0 (0.039) | 1.85 (0.071) | 2.05 (0.080) |
| F | 0.56 (0.022) | 0.7 (0.028) | 0.79 (0.031) | 1.08 (0.043) |

COMPONENT

ADVANTAGES

DISADVANTAGES


APPLICATIONS

| | | | |
|---|---|---|---|
| Chip capacitor | <ul style="list-style-type: none"> Industry standard | <ul style="list-style-type: none"> Requires 1 per line High inductance Capacitance matching problems | <ul style="list-style-type: none"> Bypass Low frequency |
| 3-Terminal feedthrough | <ul style="list-style-type: none"> Feedthrough Lower inductance | <ul style="list-style-type: none"> Current limited | <ul style="list-style-type: none"> Feedthrough Unbalanced lines High frequency |
| Syfer X2Y Integrated Passive Component | <ul style="list-style-type: none"> Very low inductance Replaces 2 (or 3) components Negates the effects of temperature, voltage and aging Provides both common mode and differential mode attenuation Can be used on balanced and unbalanced lines | <ul style="list-style-type: none"> Care must be taken to optimize circuit design | <ul style="list-style-type: none"> Bypass Balanced lines High frequency DC electric motors Unbalanced lines Audio amplifiers CANBUS |


Surface Mount EMI Filters — E03 X2Y IPCs




FILTERING APPLICATION

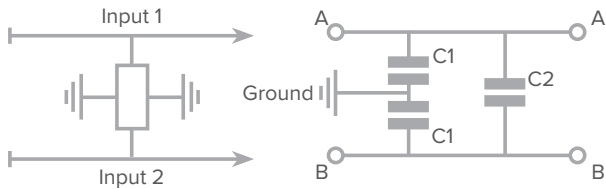


DECOUPLING APPLICATION

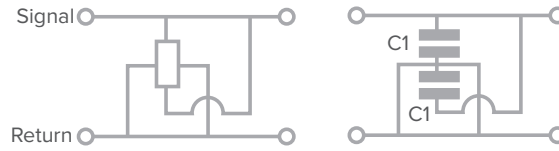

FILTERING APPLICATION

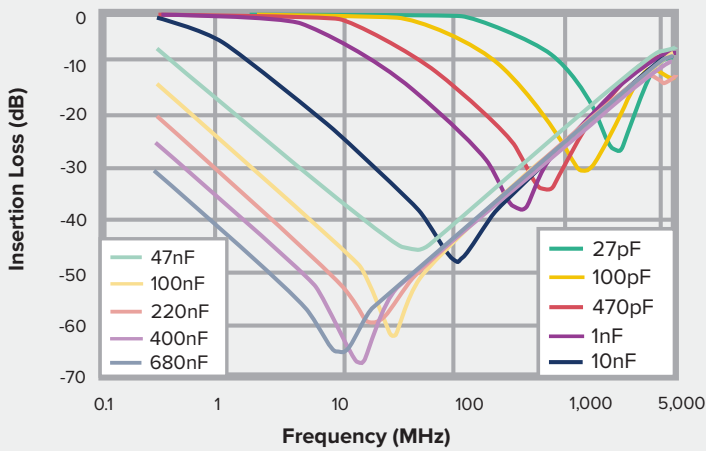

DECOUPLING APPLICATION

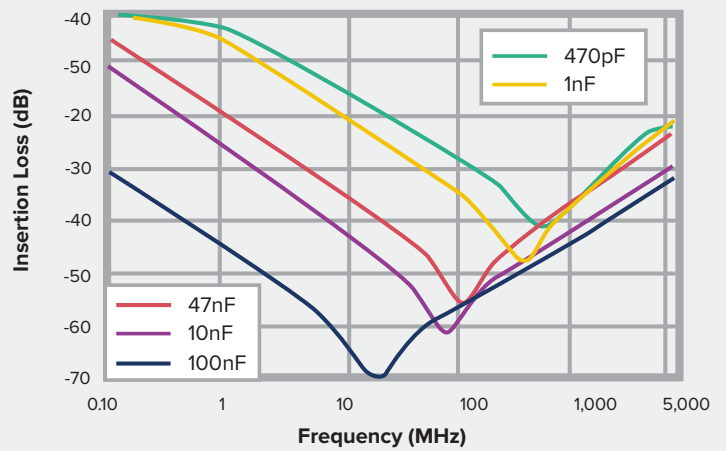

ORDERING INFORMATION — X2Y IPC RANGE

| 1812 | Y | 100 | 0334 | M | X | T | E03 |
|------------------------------|--|---|--|---|--|---|----------------------------------|
| Chip Size | Termination | Voltage | Capacitance in Picofarads (pF) C1 | Tolerance | Dielectric | Packaging | Type |
| 0805 1206 1410 1812 | J = Nickel Barrier (Tin) Y = FlexiCap™ (Tin - X7R (2R1) only) A = (Tin/Lead) Not RoHS compliant. H = FlexiCap™ (Tin/Lead) Not RoHS compliant. | 025 = 25V 050 = 50V 100 = 100V 200 = 200V 500 = 500 | First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following. Example: 0334 = 330nF. Note: C1 = 2C2 | M = ±20% (Tighter tolerances may be available on request). | A = COG/NP0 (1B) to AEC-Q200 E = X7R (2R1) to AEC-Q200 C = COG/NP0 (1B) X = X7R (2R1) | T = 178mm (7") reel R = 330mm (13") reel B = Bulk | X2Y Integrated Passive Component |

- Notes:**
- 1) A, Y and H terminations are not available for dielectric codes A and C.
 - 2) J and A terminations are not available for dielectric code E.
 - 3) Please contact your Knowles Precision Devices sales office for any special requirements.

REELED QUANTITIES

| | 178mm (7") reel | 330mm (13") reel |
|------|-----------------|------------------|
| 0805 | 3,000 | 12,000 |
| 1206 | 2,500 | 10,000 |
| 1410 | 2,000 | 8,000 |
| 1812 | 500 | 2,000 |




Other Products Available That Are Not AEC-Q200 Qualified

VC1 RESIDUAL CAPACITORS — X7R (2R1)

The VC1 residual capacitance range MLCCs provide a more stable capacitance value with voltage — not to drop below 50% of the 1Vrms 1kHz value, up to full rated DC voltage, at room temperature.

They can be operated continuously at full rated voltage, but if derated will maintain a larger percentage of their original capacitance value, e.g., at 80% RV capacitance value equals 60% approximately — see graph.

Defined capacitance value in case sizes from 0805 to 3640, with voltage rating up to 3kV. Ideal for power supplies, capacitance-critical circuits, smoothing circuits and EMI suppression.

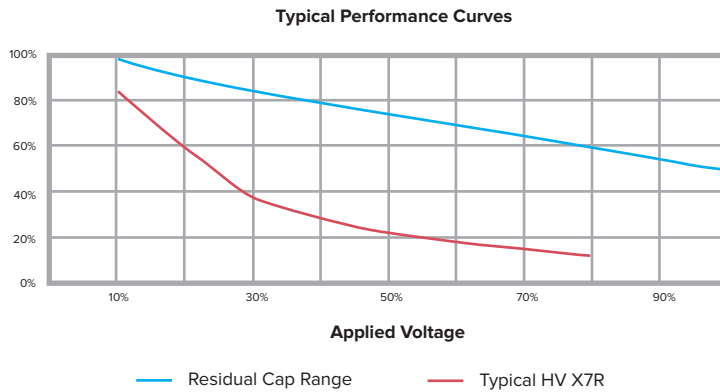

Operating Temperature:
-55°C to +125°C

Temperature Coefficient (Typical):
± 15%

Insulation Resistance at +25°C:
Time constant (Ri x Cr) 100GΩ or 1000s (whichever is the least)

Aging Rate:
Typical 1% per time decade

MINIMUM/MAXIMUM CAPACITANCE VALUES — VC1 CAPACITORS

| Chip Size | 0805 | 1206 | 1210 | 1808 | 1812 | 2220 | 2225 | 3640 |
|--------------|--------|--------|-------|-------|-------|-------|-------|-------|
| Min Cap | 100pF | 150pF | 220pF | 220pF | 470pF | 1nF | 1nF | 2.2nF |
| 250V | 12nF | 39nF | 82nF | 82nF | 220nF | 680nF | 1μF | 1.8μF |
| 500V | 2.2nF | 6.8nF | 15nF | 15nF | 56nF | 150nF | 220nF | 560nF |
| 630V | 1.5nF | 4.7nF | 8.2nF | 8.2nF | 39nF | 100nF | 120nF | 470nF |
| 1000V | 390pF | 1.5nF | 2.7nF | 2.7nF | 15nF | 39nF | 56nF | 180nF |
| 1200V | - | 1nF | 2.2nF | 2.2nF | 10nF | 27nF | 39nF | 120nF |
| 1500V | - | 560pF | 1.2nF | 1.2nF | 5.6nF | 15nF | 22nF | 68nF |
| 2000V | - | 270pF | 560pF | 560pF | 3.3nF | 10nF | 12nF | 39nF |
| 2500V | - | - | - | - | 1.8nF | 5.6nF | 8.2nF | 22nF |
| 3000V | - | - | - | - | - | 3.9nF | 5.6nF | 12nF |
| 7" reel qty | 3,000 | 2,500 | 2,000 | 1,500 | 500 | 500 | 500 | N/A |
| 13" reel qty | 12,000 | 10,000 | 8,000 | 6,000 | 2,000 | 2,000 | 2,000 | 500 |

Note: Other capacitance values may become available, please contact your Knowles Precision Devices sales office if you need values other than those shown in the above table. For dimensions and soldering information, please go to our website knowlesc capacitors.com.

Other Products Available That Are Not AEC-Q200 Qualified

HIGH TEMPERATURE HiT RANGE

200°C - COG/NPO (1B) & X7R (2R1)

The HiT range of multilayer ceramic capacitors is suitable for a variety of high temperature applications, including: oil exploration, geothermal, military, automotive under-hood and avionics. This range is manufactured to exacting standards using our unique screen printing process. This provides a high-quality component suitable for demanding applications.

- 200°C operating temperature
- 0603 to 2220 chip sizes
- COG/NPO (1B) and X7R dielectric options
- Capacitance range COG/NPO (1B) from 3.9pF up to 47nF
- Capacitance range X7R (2R1) from 100pF up to 4.7μF
- Voltage ratings from 10V to 630V
- RoHS compliant/Pb free
- Sn over Ni termination
- Sample kits available

Insulation Resistance (IR):

25°C >100GΩ or 1000secs (whichever is the least)
200°C >1GΩ or 10secs (whichever is the least)

Temperature Coefficient of Capacitance (TCC):

COG/NPO (1B) 30ppm/°C to +125°C
X7R (2R1) ±15% to +125°C

Aging Rate:

COG/NPO (1B) Zero.
X7R (2R1) typically less than 2% per time decade

HIGH TEMP. HiT250 RANGE

250°C — COG/NPO (1B) & X7R (2R1)

The HiT250 range of multilayer ceramic capacitors is suitable for a variety of high temperature applications, including: oil exploration, geothermal, military, automotive under-hood and avionics.

This range is manufactured to exacting standards using our unique screen printing process. This provides a high-quality component suitable for demanding applications.

- 250°C operating temperature
- 0603 to 2220 chip sizes
- COG/NPO (1B) and X7R dielectric options
- Capacitance range COG/NPO (1B) from 3.9pF up to 39nF
- Capacitance range X7R (2R1) from 1nF up to 2.2μF
- Voltage ratings from 10V to 630V
- RoHS compliant/Pb free
- Au over Ni termination
- Sample kits available



Insulation Resistance (IR):

25°C >100GΩ or 1000secs (whichever is the least)
250°C >100MΩ or 1secs (whichever is the least)

Temperature Coefficient of Capacitance (TCC):

COG/NPO (1B) 30ppm/°C to +125°C
X7R (2R1) ±15% to +125°C

Aging Rate:

COG/NPO (1B) Zero
X7R (2R1) typically less than 2% per time decade



Our Other Products

Broadband Blocking Capacitors

EMI Filters

Feedthrough EMI Filters

Gain Equalizers

Hi-Rel Products

High Capacitance Value Chips

High Temperature Capacitors

HiT Capacitors

Opti-Cap Capacitors

Planar Arrays

Powder Dividers

Pulse Capacitors

Pulse Power Capacitors

Radial Leaded Capacitors

Safety Certified Capacitors

Single Layer Capacitors

Solder in EMI Filters


Speciality Products

StackiCap™ Capacitors

Thin Film Products

Ultra-Low ESR Capacitors

X2Y 3-Terminal EMI Chips





Scan here
to follow us on WeChat



Asian Sales Office

O: +86 512 62588258

F: +86 512 62589258

KPD-Asia-sales@knowles.com

European Sales Office

O: +44 1603 723300

F: +44 1603 723301

KPD-Europe-sales@knowles.com

North American Sales Office

O: +1 661 295 5920

F: +1 661 295 5928

O: +1 315 655 8710

F: +1 315 655 0445

KPD-NA-sales@knowles.com