

Terminal Part Number: 12089040
Surface Plating: SN
Material Thickness [mm]: 0,32
Cross Section [mm²]: 0,50 | 0,80


Uncontrolled
Copy
For Information only!

Cable Type codes: 1002
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,60 - 2,18
Seal(s): 15324985

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1002 0,50 / 15324985		1,78	80	1,10	0,05	2,40	0,10	4,30	0,10	4,40	0,10
1002 0,80 / 15324985		2,02	90	1,15	0,05	2,45	0,10	4,50	0,10	4,50	0,10

Cable type code legend:

1002:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: ECTFE, ETFE, PBT, PTFE, PUR, TFE
Insul. Wall Designator: THIN

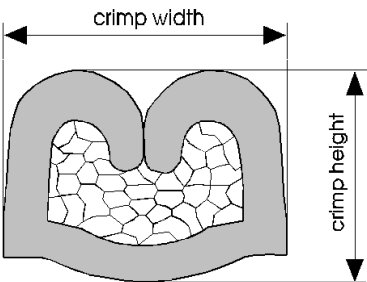

Terminal Part Number: 12089040
Surface Plating: SN
Material Thickness [mm]: 0,32
Cross Section [mm²]: 0,80


Uncontrolled
Copy
For Information only!

Cable Type codes: 1003
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 2,20 - 2,45
Seal(s): 15324984

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1003 0,80 / 15324984		2,33	90	1,15	0,05	2,45	0,10	4,50	0,10	4,50	0,10

Cable type code legend:

1003:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: ECTFE, ETFE, PTFE, PUR, TFE
Insul. Wall Designator: REGULAR

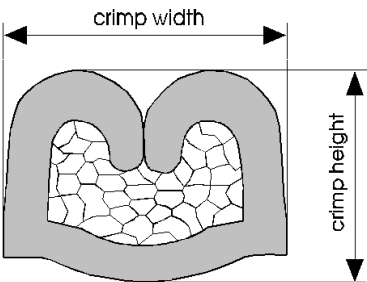

Terminal Part Number: 12089040
Surface Plating: SN
Material Thickness [mm]: 0,32
Cross Section [mm²]: 0,50 | 0,80 | 1,00


Uncontrolled
Copy
For Information only!

Cable Type codes: 1005
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,60 - 2,40
Seal(s): 15324985 | 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,50 / 15324985		1,74	80	1,10	0,05	2,40	0,10	4,30	0,10	4,40	0,10
1005 0,80 / 15324985		2,03	90	1,15	0,05	2,45	0,10	4,50	0,10	4,50	0,10
1005 1,00 / 15324982		2,23	120	1,25	0,05	2,45	0,10	4,30	0,10	4,60	0,10

Cable type code legend:

1005:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

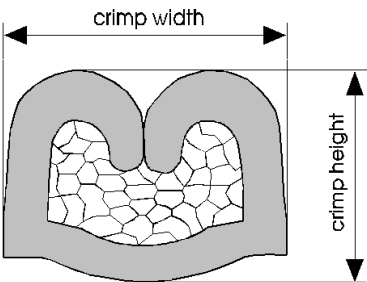

Terminal Part Number: 12089040
Surface Plating: SN
Material Thickness [mm]: 0,32
Cross Section [mm²]: 0,50 | 0,80


Uncontrolled
Copy
For Information only!

Cable Type codes: 1007
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,00 - 2,45
Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,50 / 15324982		2,15	80	1,10	0,05	2,40	0,10	4,40	0,10	4,40	0,10
1007 0,80 / 15324982		2,33	90	1,15	0,05	2,45	0,10	4,50	0,10	4,50	0,10

Cable type code legend:

1007:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

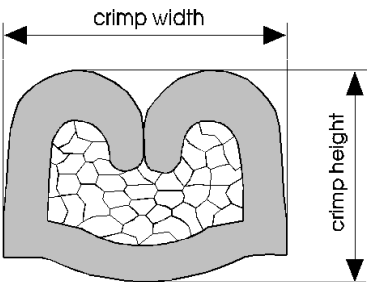

Terminal Part Number: 12089040
Surface Plating: SN
Material Thickness [mm]: 0,32
Cross Section [mm²]: 0,50 | 0,51 | 0,80


Uncontrolled
Copy
For Information only!

Cable Type codes: 1009
Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
Insulation Range Φ[mm]: 2,30 - 3,05
Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,50 / 15324982		2,45	80	1,10	0,05	2,40	0,10	4,40	0,10	4,40	0,10
1009 0,51 / 15324982		2,45	80	1,10	0,05	2,40	0,10	4,40	0,10	4,40	0,10
1009 0,80 / 15324982		2,78	90	1,15	0,05	2,45	0,10	4,50	0,10	4,50	0,10

Cable type code legend:

1009:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: SPECIAL

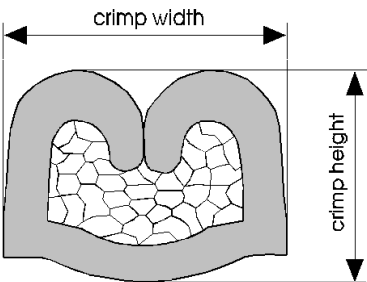

Terminal Part Number: 12089040
Surface Plating: SN
Material Thickness [mm]: 0,32
Cross Section [mm²]: 0,50 | 0,80


Uncontrolled
Copy
For Information only!

Cable Type codes: 1011
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,65 - 3,30
Seal(s): 15324980 | 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1011 0,50 / 15324982		2,78	80	1,10	0,05	2,40	0,10	4,40	0,10	4,40	0,10
1011 0,80 / 15324980		3,13	90	1,15	0,05	2,45	0,10	4,60	0,10	4,50	0,10

Cable type code legend:

1011:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: EAE, POLYOLEFIN, PVC, TPE, XLPE
Insul. Wall Designator: HEAVY DUTY

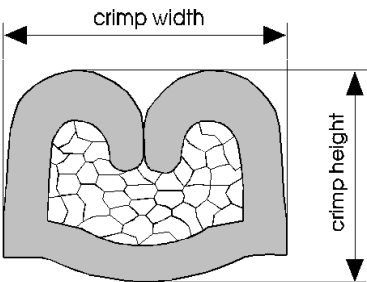

Terminal Part Number: 12089040
Surface Plating: SN
Material Thickness [mm]: 0,32
Cross Section [mm²]: 0,80


Uncontrolled
Copy
For Information only!

Cable Type codes: 1025
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,85 - 2,18
Seal(s): 15324985

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 0,80 / 15324985		2,02	90	1,15	0,05	2,45	0,10	4,50	0,10	4,50	0,10

Cable type code legend:

1025:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE
Insul. Wall Designator: THIN

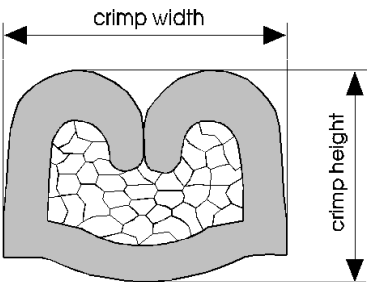

Terminal Part Number: 12089040
Surface Plating: SN
Material Thickness [mm]: 0,32
Cross Section [mm²]: 0,80


Uncontrolled
Copy
For Information only!

Cable Type codes: 1026
Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
Insulation Range Φ[mm]: 2,20 - 2,45
Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 0,80 / 15324982		2,33	90	1,15	0,05	2,45	0,10	4,50	0,10	4,50	0,10

Cable type code legend:

1026:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: HDPE, PVC, XLPE
Insul. Wall Designator: REGULAR

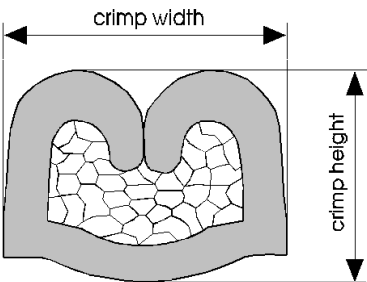

Crimp Information Sheet

DELPHI

Terminal Part Number: 12089040

Surface Plating: SN

Material Thickness [mm]: 0,32

Cross Section [mm²]: 0,80

**Uncontrolled
Copy**

For Information only!

Cable Type codes: 1040

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ [mm]: 1,85 - 2,18

Seal(s): 15324985

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1040 0,80 / 15324985		2,02	200	1,15	0,05	2,30	0,10	4,40	0,10	4,50	0,10

Cable type code legend:

1040:


Industry Designator: SAE

Conductor Material: STAINLESS STEEL

Conductor Plating: NONE

Insul. Material: ECTFE, ETFE, PTFE, PUR, TFE

Insul. Wall Designator: THIN

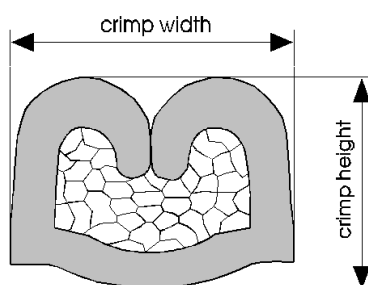

Terminal Part Number: 12089040
Surface Plating: SN
Material Thickness [mm]: 0,32
Cross Section [mm²]: 0,80


Uncontrolled
Copy
For Information only!

Cable Type codes: 1041
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,20 - 2,45
Seal(s): 15324984

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1041 0,80 / 15324984		2,33	200	1,15	0,05	2,30	0,10	4,40	0,10	4,50	0,10

Cable type code legend:

1041:
Industry Designator: SAE
Conductor Material: STAINLESS STEEL
Conductor Plating: NONE
Insul. Material: PTFE, TFE
Insul. Wall Designator: REGULAR

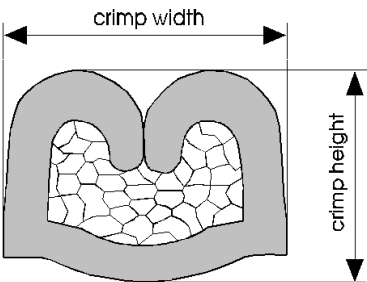

Terminal Part Number: 12089040
Surface Plating: SN
Material Thickness [mm]: 0,32
Cross Section [mm²]: 0,80


Uncontrolled
Copy
For Information only!

Cable Type codes: 1043
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,20 - 2,45
Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1043 0,80 / 15324982		2,33	200	1,15	0,05	2,30	0,10	4,40	0,10	4,50	0,10

Cable type code legend:

1043:
Industry Designator: SAE
Conductor Material: STEEL
Conductor Plating: NONE
Insul. Material: XLPE
Insul. Wall Designator: REGULAR

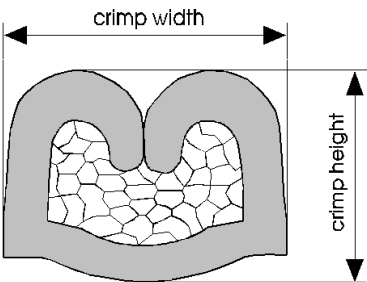

Terminal Part Number: 12089040
Surface Plating: SN
Material Thickness [mm]: 0,32
Cross Section [mm²]: 0,50 | 0,80


Uncontrolled
Copy
For Information only!

Cable Type codes: 1044
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,30 - 2,80
Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1044 0,50 / 15324982		2,45	120	1,05	0,05	2,40	0,10	4,40	0,10	4,40	0,10
1044 0,80 / 15324982		2,65	200	1,15	0,05	2,30	0,10	4,40	0,10	4,50	0,10

Cable type code legend:

1044:
Industry Designator: SAE
Conductor Material: STEEL
Conductor Plating: NONE
Insul. Material: XLPE
Insul. Wall Designator: SPECIAL

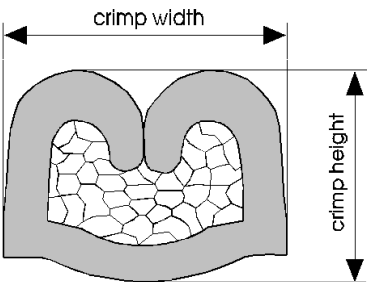

Terminal Part Number: 12089040
Surface Plating: SN
Material Thickness [mm]: 0,32
Cross Section [mm²]: 0,80


Uncontrolled
Copy
For Information only!

Cable Type codes: 1056
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 1,85 - 2,18
Seal(s): 15324985

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1056 0,80 / 15324985		2,02	90	1,15	0,05	2,45	0,10	4,50	0,10	4,50	0,10

Cable type code legend:

1056:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NI
Insul. Material: FLUORPOLYM, PTFE
Insul. Wall Designator: THIN

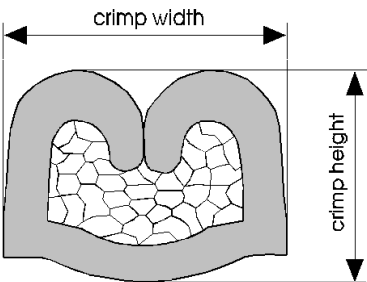

Terminal Part Number: 12089040
Surface Plating: SN
Material Thickness [mm]: 0,32
Cross Section [mm²]: 0,80


Uncontrolled
Copy
For Information only!

Cable Type codes: 1077
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 2,20 - 2,45
Seal(s): 15324984

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1077 0,80 / 15324984		2,33	90	1,15	0,05	2,45	0,10	4,50	0,10	4,50	0,10

Cable type code legend:

1077:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: AG
Insul. Material: PTFE
Insul. Wall Designator: REGULAR

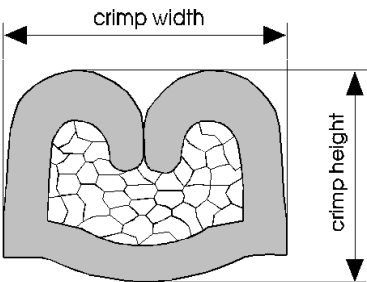

Terminal Part Number: 12089040
Surface Plating: SN
Material Thickness [mm]: 0,32
Cross Section [mm²]: 0,50


Uncontrolled
Copy
For Information only!

Cable Type codes: 1094
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,35 - 2,50
Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1094 0,50 / 15324982		2,43	80	1,10	0,05	2,40	0,10	4,40	0,10	4,40	0,10

Cable type code legend:

1094:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: HEAVY DUTY

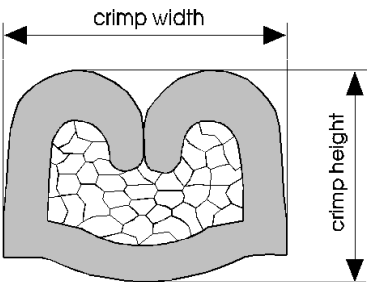

Terminal Part Number: 12089040
Surface Plating: SN
Material Thickness [mm]: 0,32
Cross Section [mm²]: 0,75 | 1,00


Uncontrolled
Copy
For Information only!

Cable Type codes: 2005
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,70 - 2,45
Seal(s): 15324985 | 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2005 0,75 / 15324985		1,90	85	1,10	0,05	2,40	0,10	4,50	0,10	4,50	0,10
2005 1,00 / 15324982		2,18	120	1,20	0,05	2,40	0,10	4,60	0,10	4,50	0,10

Cable type code legend:

2005: FLR2X (SAAB C)
Industry Designator: ISO
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: THIN

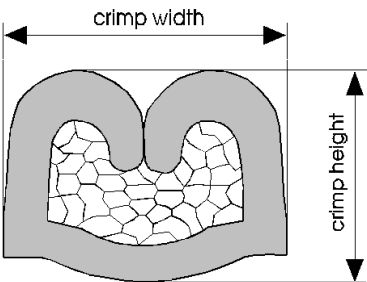

Terminal Part Number: 12089040
Surface Plating: SN
Material Thickness [mm]: 0,32
Cross Section [mm²]: 1,00


Uncontrolled
Copy
For Information only!

Cable Type codes: 2006
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,50 - 2,71
Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2006 1,00 / 15324982		2,61	120	1,20	0,05	2,40	0,10	4,60	0,10	4,50	0,10

Cable type code legend:

2006:
Industry Designator: ISO
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: REGULAR

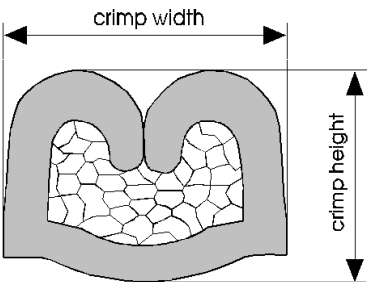

Crimp Information Sheet

DELPHI

Terminal Part Number: 12089040
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 0,50 | 0,75 | 1,00

**Uncontrolled
Copy**
 For Information only!

Cable Type codes: 2010
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,30 - 2,10
 Seal(s): 15324985 | 12089444 | 15338470 | 12034365

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,50 / 12034365		1,50	80	1,40	0,05	1,90	0,10	4,50	0,10	4,60	0,10
2010 0,50 / 12089444		1,50	80	1,40	0,05	1,90	0,10	4,10	0,10	4,70	0,10
2010 0,75 / 15324985		1,75	120	1,50	0,05	1,95	0,10	4,40	0,10	4,70	0,10
2010 0,75 / 12089444		1,75	120	1,50	0,05	1,95	0,10	4,40	0,10	4,70	0,10
2010 0,75 / 15338470		1,75	120	1,50	0,05	1,95	0,10	4,60	0,10	4,60	0,10
2010 1,00 / 15324985		1,95	120	1,20	0,05	2,40	0,10	4,70	0,10	4,60	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B


Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

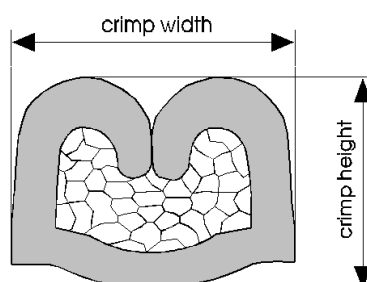

Terminal Part Number: 12089040

Surface Plating: SN

Material Thickness [mm]: 0,32

Cross Section [mm²]: 1,00

Cable Type codes: 2011

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 2,38 - 2,70

Seal(s): 15324982

Uncontrolled
Copy

For Information only!

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2011 1,00 / 15324982		2,54	120	1,20	0,05	2,40	0,10	4,60	0,10	4,50	0,10

Cable type code legend:

2011: FL33X, FLK, FLY, FLYKW, IH WIRE


Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: P/EST, PE, PVC, XLPE

Insul. Wall Designator: REGULAR

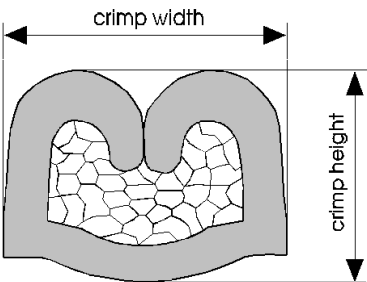

Terminal Part Number: 12089040
Surface Plating: SN
Material Thickness [mm]: 0,32
Cross Section [mm²]: 0,75


Uncontrolled
Copy
For Information only!

Cable Type codes: 2014
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,70 - 2,90
Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2014 0,75 / 15324982		2,80	85	1,15	0,05	2,45	0,10	4,50	0,10	4,50	0,10

Cable type code legend:

2014:
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC
Insul. Wall Designator: HEAVY

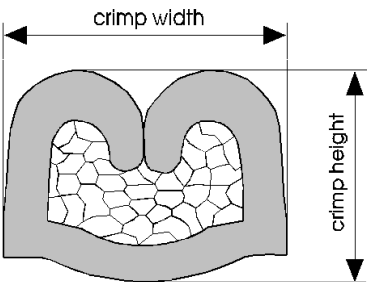

Crimp Information Sheet

DELPHI

Terminal Part Number: 12089040

Surface Plating: SN

Material Thickness [mm]: 0,32

Cross Section [mm²]: 0,75

**Uncontrolled
Copy**

For Information only!

Cable Type codes: 2017

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ [mm]: 1,60 - 1,90

Seal(s): 12089444

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2017 0,75 / 12089444		1,75	165	1,10	0,05	2,40	0,10	4,30	0,10	4,50	0,10

Cable type code legend:

2017: FLR41X-B, FLRY-A


Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: SN

Insul. Material: PA, PVC, XLPE

Insul. Wall Designator: THIN

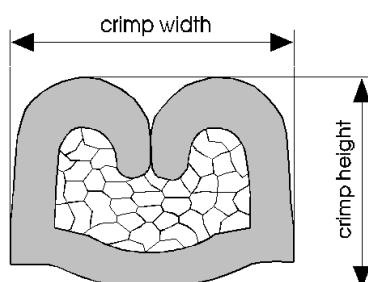

Terminal Part Number: 12089040
Surface Plating: SN
Material Thickness [mm]: 0,32
Cross Section [mm²]: 0,75


Uncontrolled
Copy
For Information only!

Cable Type codes: 2023
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,20 - 2,50
Seal(s): 12089444

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2023 0,75 / 12089444		2,35	148	1,10	0,05	2,40	0,10	4,70	0,10	4,55	0,10

Cable type code legend:

2023: FL2G
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: SIL, SIR
Insul. Wall Designator: REGULAR

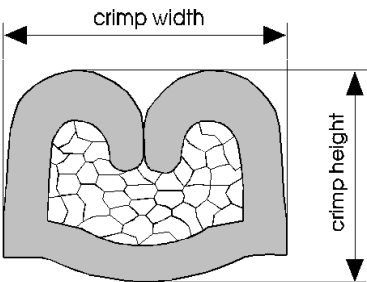

Terminal Part Number: 12089040
Surface Plating: SN
Material Thickness [mm]: 0,32
Cross Section [mm²]: 0,80

Uncontrolled
Copy
For Information only!

Cable Type codes: 9003
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,15 - 2,35
Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9003 0,80 / 15324982		2,25	90	1,15	0,05	2,45	0,10	4,50	0,10	4,50	0,10

Cable type code legend:

9003:
Industry Designator: N/G
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: PVDF
Insul. Wall Designator: MIX

