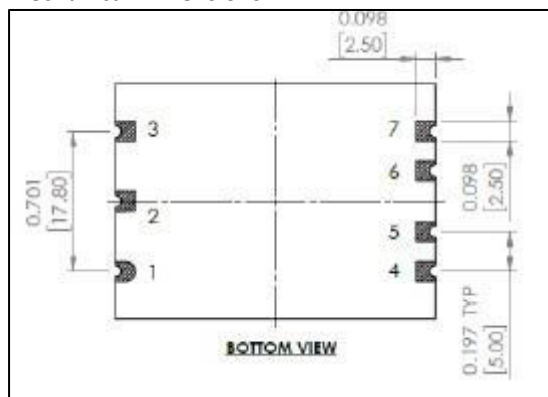


ECN/PCN No.: 4807

For Manufacturer			
Product Description: Precision Ultra Low Phase Noise OCXO in 41x30mm SMD Package with OSC Disable and Oven Alarm features for Instrumentation	Abrakon Part Number / Part Series: O-CS41	☐ Documentation only	☒ Series
		☒ ECN	☐ Part Number
Affected Revision: B	New Revision: C	☐ EOL	
		Application:	☐ Safety ☒ Non-Safety

Prior to Change:

Mechanical Dimensions:



Part Number Builder:

Creating a Part Number

Q - C S41 F S XX XX - P - X - 05 - R - XX.XXX MHZ - X

OCXO
Conventional Power

Package Code
SMD 41x30x16, 6 pads

Supply Voltage

Code	Specification
F	12V, NOM

Output

Code	Specification
S	Sinewave

Temperature Stability

Code	Specification
59	5x10 ⁻⁹
19	E grade 1x10 ⁻⁹

Operating Temperature Range

Code	Specification
	In 5°C steps
GX	-10°C to 75°C*
IX	0°C to 75°C, E grade

Operable to 80°C

Packaging

Blank	Bulk

Output Frequency
Please specify the frequency in units of MHz out to 3-digit accuracy after the decimal.
Example: 10.000MHZ

Environmental

Code	Specification
R	RoHS complaint, not designed for reflow

Aging

Code	Specification
05	5E-10 = 0.5 ppb/day

Phase Noise (see Table)

Code	Specification
X	Per Table


Deviation Slope

Code	Specification
P	Positive, 0 to Vref

After Change:

Mechanical Dimensions:

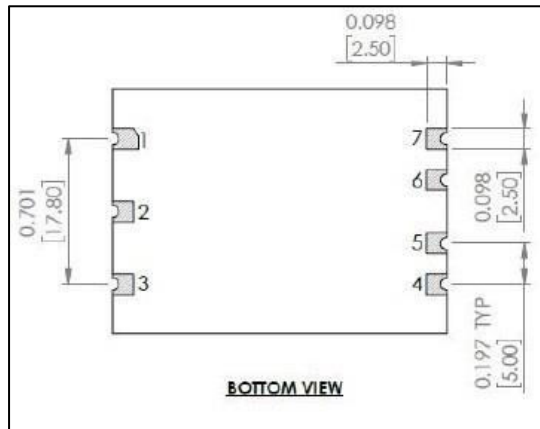-Pin locations 1 and 3 switched:



Part Number Builder:

-a "dash" (-) inserted inbetween the the package code and supply voltage code:

Creating a Part Number

Q - C S41 - F S XX XX - P - X - 05 - R - XX.XXX MHZ - X

OCXO
Conventional Power
Package Code
SMD 41x30x16, 6 pads

Supply Voltage

Code	Specification
F	12V, NOM

Output

Code	Specification
S	Sinewave

Temperature Stability

Code	Specification
59	5x10 ⁻⁹
19	E grade 1x10 ⁻⁹

Operating Temperature Range

Code	Specification
GX	In 5°C steps
IX	-10°C to 75°C*
IX	0°C to 75°C, E grade

Operable to 80°C

Packaging

Blank	Bulk

Output Frequency

Please specify the frequency in units of MHz out to 3-digit accuracy after the decimal.
Example: 10.000MHZ

Environmental

Code	Specification
R	RoHS complaint, not designed for reflow

Aging

Code	Specification
05	SE-10 = 0.5 ppb/day

Phase Noise (see Table)

Code	Specification
X	Per Table

Deviation Slope

Code	Specification
P	Positive, 0 to Vref

Cause/Reason for Change:

An internal documentation error.

Change Plan

Effective Date:

08/04/2025

Additional Remarks:

N/A

Change Declaration:

This statement addresses both the electrical and mechanical changes of the product series.

Issued Date:

08/04/2025

Issued By:

Brooke Cushman
Product Engineer

Issued Department:

Engineering

Approval: <i>Thomas Culhane</i> Engineering Director	Approval: <i>Reuben Quintanilla</i> Quality Director	Approval: <i>Ying Huang</i> Purchasing Director
For Abracon EOL only		
Last Time Buy (if applicable): N/A	Alternate Part Number / Part Series: N/A	
Additional Approval: N/A	Additional Approval: N/A	Additional Approval: N/A
Customer Approval (If Applicable)		
Qualification Status: ☐ Approved ☐ Not accepted Note: It is considered approved if there is no feedback from the customer 1 month after ECN/PCN is released.		
Customer Part Number:		Customer Project:
Company Name:	Company Representative:	Representative Signature:
Customer Remarks:		

Brand	Affected PN	Series	ECO#	Datasheet Link	ECN Notification Link
NEL	O-CS41-FS59GX-P-P-05-R-10.000MHZ	O-CS41	4807	https://abracon.com/datasheets/O-CS41.pdf	https://abracon.com/downloads/ECN-PCN/ECN-PCN-4807-O-CS41.pdf
NEL	O-CS41-FS59GX-P-L-05-R-10.000MHZ	O-CS41	4807	https://abracon.com/datasheets/O-CS41.pdf	https://abracon.com/downloads/ECN-PCN/ECN-PCN-4807-O-CS41.pdf
NEL	O-CS41-FS19IX-P-E-05-R-10.000MHZ	O-CS41	4807	https://abracon.com/datasheets/O-CS41.pdf	https://abracon.com/downloads/ECN-PCN/ECN-PCN-4807-O-CS41.pdf
NEL	O-CS41-FS59GX-P-U-05-R-10.000MHZ	O-CS41	4807	https://abracon.com/datasheets/O-CS41.pdf	https://abracon.com/downloads/ECN-PCN/ECN-PCN-4807-O-CS41.pdf

Precision Ultra Low Phase Noise OCXO in 41x30mm SMD Package with OSC Disable and Oven Alarm features for Instrumentation



ESD Sensitive

41 x 30 x 16 mm
Datasheet #2213A

Features

- SC-cut crystal
- High Stability
- Low Aging
- Ultra Low Phase Noise
 - Ultimate (U) -146 dBc/Hz at 10Hz
 - 172 dBc/Hz on the floor
 - Extraordinary (E) -88 dBc/Hz at 0.1 Hz
 - 119 dBc/Hz at 1 Hz
 - 148 dBc/Hz at 10 Hz
 - 168 dBc/Hz on the floor

Applications

- Instrumentation
- Radar
- Satellite Communications
- Reference
- COTS/Dual use

Absolute Maximum Ratings

Parameters	Symbol	Condition	Min	Typ	Max	Unit	Notes
Input Break Down Voltage	Vcc		-0.5		13.6	V	
Storage Temperature	Ts		-40		85	°C	
Control Voltage	Vc		-1		5.5	V	

Electrical

Parameters	Symbol	Condition	Min	Typ	Max	Unit	Notes
Frequency	F			10.000		MHz	
Frequency Stability	$\Delta F/F$	vs. temp. grades L, P, and U			± 5 ± 200	ppb	-10°C to 75°C 75°C to 80°C
		vs. temp, grade E			± 1		0°C to 75°C
		vs. Supply		0.2	0.5	ppb/5%Vcc	
		Vs. Load			0.5	ppb/5% Rload	
Aging		per day per 30 days per year, first year second year 15 years		5E-10 5E-9 3E-8 2E-8 3E-7			After 30 days
Allan Deviation		0.1s 1.0 s 10 s		3E-13 2E-12 5E-12			

All parameters for 10 MHz

Precision Ultra Low Phase Noise OCXO in 41x30mm SMD Package with OSC Disable and Oven Alarm features for Instrumentation



ESD Sensitive

41 x 30 x 16 mm
Datasheet #2213A

Electrical (cont.)

Parameters	Symbol	Condition	Min	Typ	Max	Unit	Notes	
SSB Phase Noise (Achieved after 10 minutes warm-up) 2*	$\mathcal{L}(\phi)$	1Hz		-110	-105	dBc/Hz	Grade L	All parameters for 10 MHz
		10 Hz			-140			
		100 Hz			-155			
		1 KHz			-160			
		10 KHz			-168			
		100 KHz			-170			
		1Hz			-112	dBc/Hz	Grade P	
		10 Hz			-145			
		100 Hz			-156			
		1 KHz			-162			
		10 KHz			-170			
		100 KHz			-172			
		1Hz			-115	dBc/Hz	Grade U	
		10 Hz			-146			
		100 Hz			-156			
		1 KHz			-163			
		10 KHz			-170			
		100 KHz			-172			
		0.1Hz			-88	dBc/Hz	Grade E 6*	
		1Hz			-119			
		10 Hz			-148			
		100 Hz			-160			
		1 KHz			-168			
		10 KHz			-168			
		100 KHz			-168			
Retrace		After 30 minutes			±10	ppb	24 Hours off 3*	
G-sensitivity		worst direction			±1.0	ppb/G		
Input Voltage	V _{cc}		10.5	12.0	12.6	V		
Power consumption	P	steady state, 25°C steady state, -10°C start-up @ -10°C		1.2 1.8 2.5	1.5 3.2	W	Still air	
Spectral Purity		Spurious Harmonics/Sine Harmonics		-35	-80 -30 -45	dBc	Non-harmonic E grade	
Load		Internally AC-coupled 50 Ohm						
Warm-up time	τ_w	to 0.1ppm accuracy to 10ppb accuracy		3	5 10	minutes	Off time <24 hrs Aging rate was reached	
Start-up time	τ_s	From cold start at room temperature		5		seconds	RF output to appear	
		From OSC EN activation			0.1			
Output Waveform		Sinewave						
Output Power			+10	+13	+17	dBm	L, P, and U grades	
			+7		+12		E grade	
Control voltage	V _c		0		5.0	V		
Reference Voltage	V _{ref}	No load	4.8 4.0	5.0 4.096	5.2 4.2	V	100 Ohm series to V _{ref} E grade, straight to V _{ref}	
Output Impedance		At V _{ref} pin			100	Ohm	L, P, and U grades	

Precision Ultra Low Phase Noise OCXO in 41x30mm SMD Package with OSC Disable and Oven Alarm features for Instrumentation



ESD Sensitive

41 x 30 x 16 mm
Datasheet #2213A

Electrical (cont.)

Parameters	Symbol	Condition	Min	Typ	Max	Unit	Notes
Output Short Circuit Current Vref	Io			20		mA	E grade
Pull range		from nominal F	±0.3	±0.5	±0.8	ppm	
Absolute Pull Range	APR	Over all conditions	±0.05			ppm	Sufficient for lifetime, 15 years
Deviation slope		Monotonic, positive	0.15		0.25	ppm/V	
Tuning Linearity					10%		
Initial Calibration	ΔF/F	As shipped at 25°C, Vc = 2.50 V			±0.1	ppm	L, P, and U grades
					±0.03		E grade
Stability	Vc0	@25°C, Fnom.	2.5 ± 0.3			V	3*
Oven Ready (N/A for E grade)		V pad #2	3.3		0.5	V	Ready Not Ready
Oscillator Enable		CMOS Logic “1” (5.0V>V>2.4) or floating Logic “0” (V<0.5V)	Enabled			V	Oscillation stops 5*
			Disabled				
Modulation Bandwidth	Fm	-3 dB at 1 KHz	DC		1	KHz	

Environmental and Mechanical

Parameter	Description
Operating Temperature Range	-10°C to 75°C. Operable range -10°C to 80°C, meaning that stability from 75°C to 80°C of ± 5 ppb may not be met, otherwise OCXO will function. 0°C to 75°C for E grade
Mechanical Shock	Per MIL-STD-202, 30G, 11ms
Vibration	Per MIL-STD-202, 5G to 2000Hz
Soldering Conditions	See profile below. The device may be reflowed once. Reflowing upside down is not allowed. Hand soldering is highly encouraged. NO CLEAN assembly is recommended

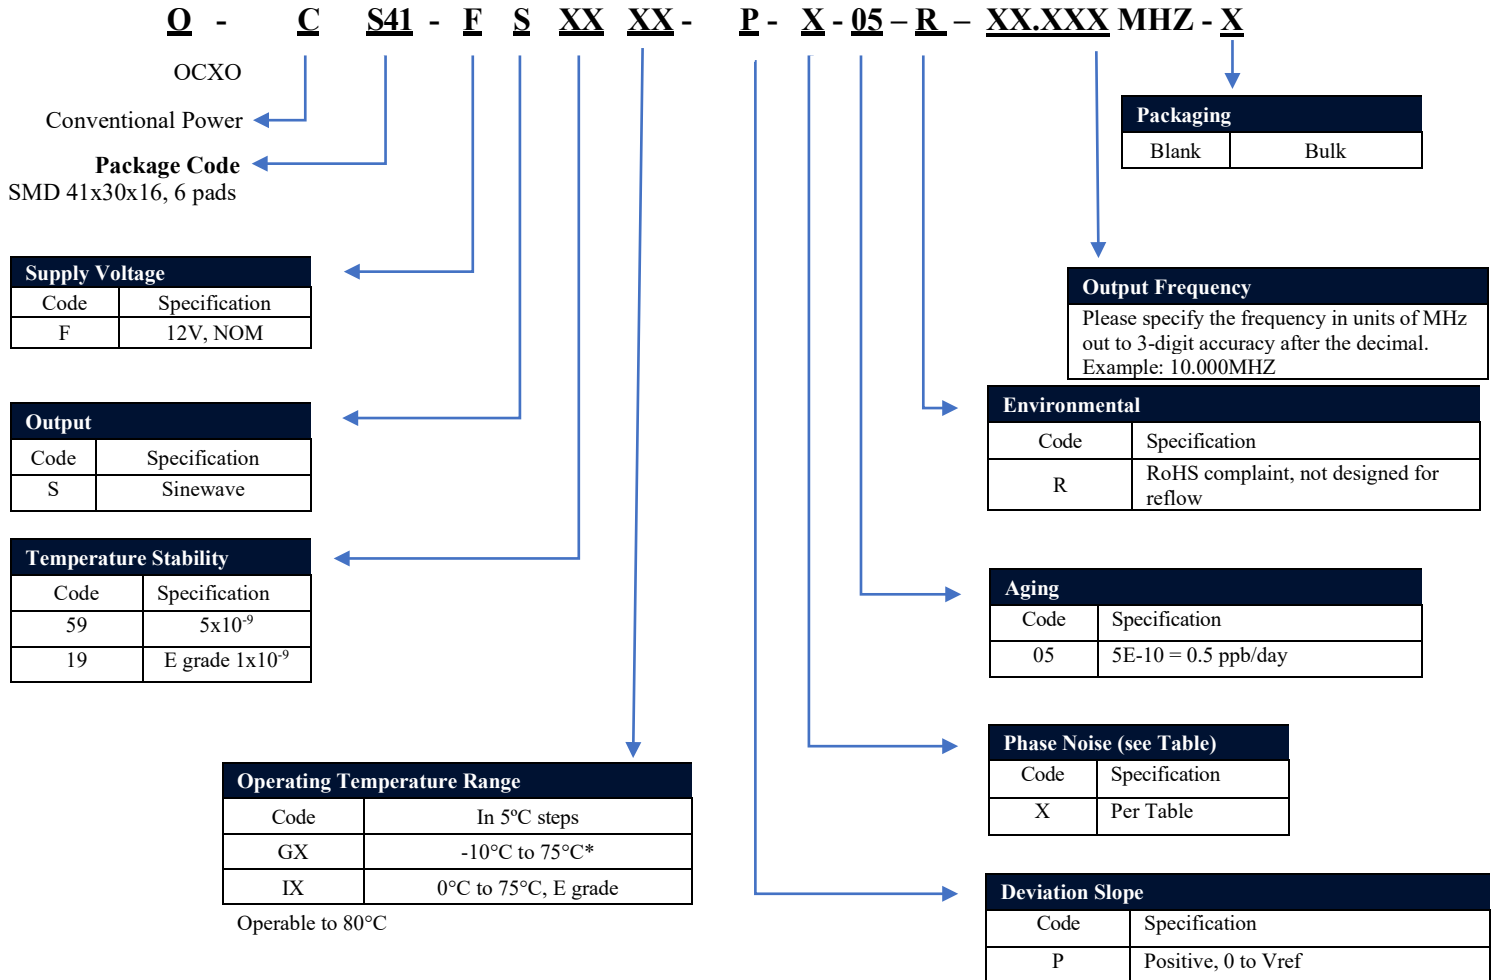
Precision Ultra Low Phase Noise OCXO in 41x30mm SMD Package with OSC Disable and Oven Alarm features for Instrumentation



ESD Sensitive

41 x 30 x 16 mm
Datasheet #2213A

Creating a Part Number



Not all combinations are available. Consult Factory.

Temperature Code Table

Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C
A	-40	F	-15	K	10	P	35	U	60	Z	85
B	-35	G	-10	L	15	Q	40	V	65		
C	-30	H	-5	M	20	R	45	W	70		
D	-25	I	0	N	25	S	50	X	75		
E	-20	J	5	O	30	T	55	Y	80		

Notes:

2* It's assumed that phase noise test is performed under static conditions (no vibration), in still air, and care is taken for minimizing EMI. Cross correlation method is recommended with equipment having adequate performance

3* Longer storage time, especially at low temperatures, may affect both retrace and setability parameters. It may require few days on power for re-stabilization

4) All parameters, unless otherwise specified, are at nominal conditions, i.e.: T=25°C, Nominal Vcc & Nominal Load.

5) Additional retrace from OSC DIS to OSC EN is within normal aging and temperature stability range of frequency deviation. Cannot be specified separately.

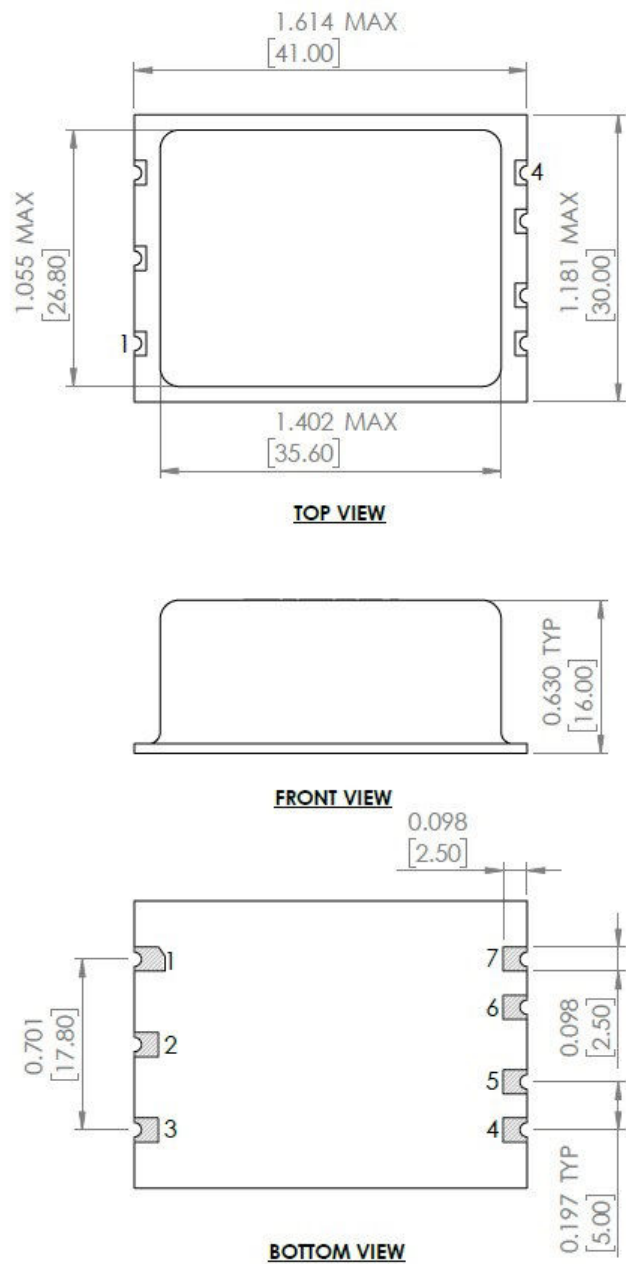
6* E grade phase noise test is performed with internal bias to Vc = 2.5 V, provided by resistive divider from Vref. Resistors are low noise metal film. After the test the bias is removed.

Precision Ultra Low Phase Noise OCXO in 41x30mm SMD Package with
OSC Disable and Oven Alarm features for Instrumentation



41 x 30 x 16 mm
Datasheet #2213A

Mechanical Dimensions




Pin #	Function
1	GND
2	Oven Ready indicator (N/A for E grade)
3	RF Output
4	Vcc
5	Output Enable
6	Vc
7	Vref

Dimensions: inches [mm]

**Precision Ultra Low Phase Noise OCXO in 41x30mm SMD Package with
OSC Disable and Oven Alarm features for Instrumentation**


ESD Sensitive

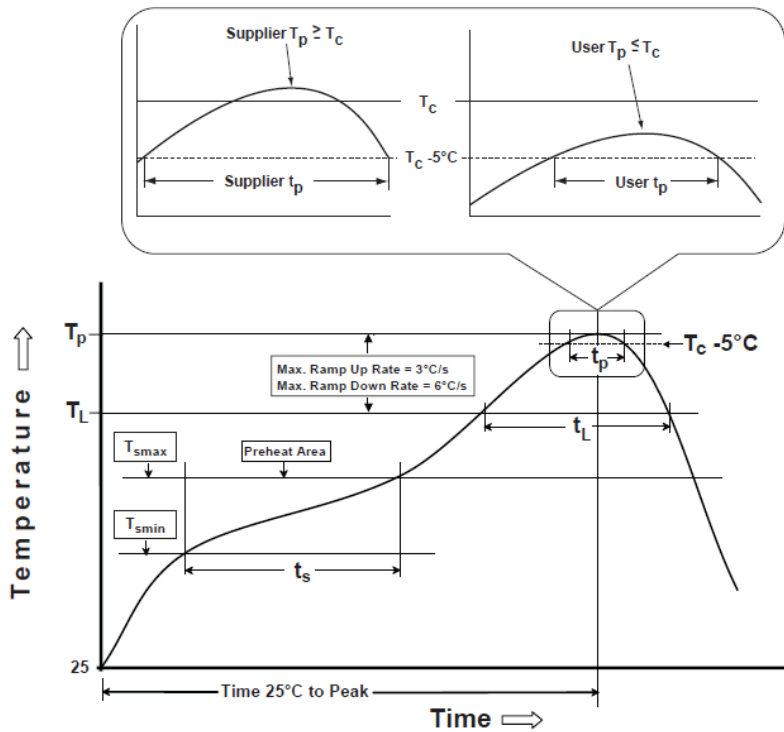 41 x 30 x 16 mm
 Datasheet #2213A

Reflow Profile [JEDEC J-STD-020]

Table 1

SnPb Eutectic Process Classification Temperatures (T_c)		
Package Thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm	235°C	220°C
≥2.5 mm	220°C	220°C

Table 2

Pb-Free Process Classification Temperatures (T_c)			
Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
<1.6 mm	260°C	260°C	260°C
1.6 mm - 2.5 mm	260°C	250°C	245°C
>2.5 mm	250°C	245°C	245°C

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat / soak		
Temperature minimum (T_{smin})	100°C	150°C
Temperature maximum (T_{smax})	150°C	200°C
Time (T_{smin} to T_{smax}) (t_s)	60 - 120 sec.	60 - 120 sec.
Average ramp-up rate (T_{smax} to T_p)	3°C/sec. max	3°C/sec. max
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_L)	60 - 150 sec.	60 - 150 sec.
Peak package body temperature (T_p)*	see Table 1	see Table 2
Time (t_p)** within 5°C of the specified classification temperature (T_c)	20 sec.	30 sec.
Ramp-down rate (T_p to T_{smax})	6°C/sec. max	6°C/sec. max
Time 25°C to peak temperature	6 min. max	8 min. max
Reflow cycles	1 max	1 max

 *Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

 **Tolerance for time at peak profile temperature (t_p) is defined as supplier minimum and a user maximum.

Precision Ultra Low Phase Noise OCXO in 41x30mm SMD Package with OSC Disable and Oven Alarm features for Instrumentation

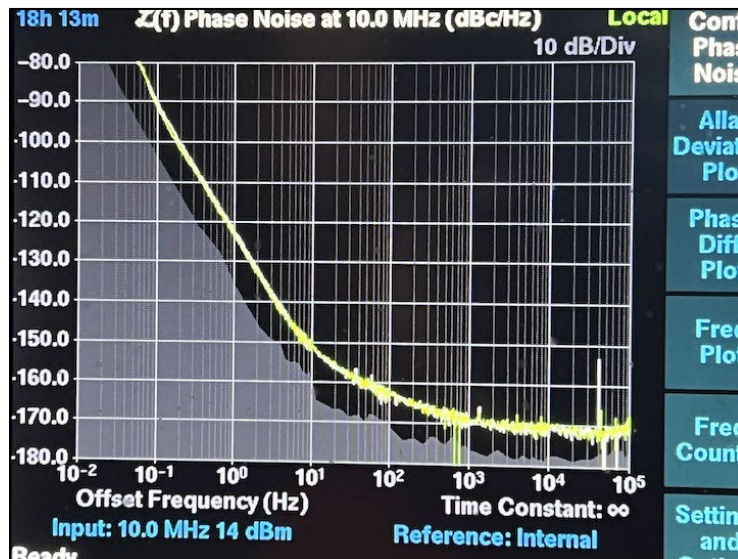


ESD Sensitive

41 x 30 x 16 mm
Datasheet #2213A

Phase Noise Plot

E Grade performance example



Allan Deviation Plot

